



CATALOGUE
2024

abrabeta.it

EN





Abra Beta has been an outstanding benchmark for professionals operating in the abrasive sector since **1975**. Our industrial facility has always dedicated passion and utmost commitment to product quality and customer care.

The company has grown over the years, consolidating its presence on both the domestic and international markets, earning itself a leader position in the production of bonded abrasives.

gruppo-beta.com



In **2018** Abra Beta joined the Beta Utensili Group, as part of a highly ambitious industrial growth project.

The continuing development strategy that Abra Beta and group pursue, has led to the acquisition in **2019** of **Elpa Abrasivi**, a leading company in the manufacture of coated abrasives. This merger has ensured our company has the technical, productive and commercial skills to be a competent and complete partner in the market.



PRESENT IN OVER
100 COUNTRIES
ACROSS THE GLOBE
WITH OVER 250
IMPORTERS



Our **range of over 1,400 products** provide our partners with a complete and comprehensive service.



The mission of Abra Beta is to confirm its reputation as a reliable superior quality manufacturer for every single product it supplies.

All **Abra Beta** brand products in this catalogue are shipped from the Beta Utensili logistic centre.



The facility is located in Massalengo (Lodi), it covers an area of over **22,000 sqm** and handles **over 1,400** Abra Beta range products on a daily basis.

Abra Beta has set itself the goal of guaranteeing its partners rapid and reliable deliveries.





LINEA PLATINUM
 Disci per la lavorazione di materiali
 per applicazioni avanzate in
 officine, cantieri edili e
 nell'edilizia.

Visit the new **Abra Beta** simple and user-friendly website for all the latest news on our products and business services!

abrabeta.it

Dischi Rigidi

Maggiori Informazioni →

Dischi Flessibili

Maggiori Informazioni →



Leader nella produzione di abrasivi professionali per la lavorazione di tutti i materiali.

Abra Beta rappresenta dal 1976 un territorio riferimento internazionale per i professionisti degli abrasivi. Qualità del prodotto e cura del cliente sono da sempre alla base della filosofia e dell'ampio che caratterizza il nostro modo industriale. Nel corso degli anni l'azienda è cresciuta costantemente e si è presentata sul mercato italiano ed estero, conquistandosi una posizione da leader nella produzione di abrasivi rigidi.

Membri O.S.A.

Abra Beta è un membro dell'Organizzazione per la Sicurezza negli Abrasivi (OSAI) per la sicurezza dei utilizzatori ed è sempre al primo posto nel nostro sito e nelle nostre attività e progetti, garantendo la sicurezza del nostro prodotto.



NOVITÀ DI PRODOTTO

Resta sempre aggiornato su tutte le novità e gli eventi Abra Beta



Linea Smart Abrabeta



Linea Twin Cut Plus



NEW DISPLAY UNIT C68N

With this **Display Unit C68N**, Abra Beta offers a versatile and effective display solution for points of sale.

The Display Unit is always customisable to accommodate all the Abra Beta catalogue products according to the specific requirements of our partners.

For the set-up with predefined assortments you will find all our new solutions in the section **"SHOP IN SHOP"** from page 135.

Always with **YOU!**



The Abra Beta Vans hold all the **top products** in our catalogue. At the request of our partners, our demonstrator technicians will visit your facility to perform trials on how to use our products and find the **best solutions** for each machining type.

Abra Beta has set itself the goal of providing **highly competent** technical support to align the products supplied by the company with specific market demands.

Index

SMART LINE

Solid Discs for Steel	
THINNER CUTTING DISCS	18 ■
CUTTING DISCS	18 ■
GRINDING DISCS	19 ■
ZIRCONIA GRINDING DISCS	19 ■
Solid Discs for Stainless Steel	
THINNER CUTTING DISCS.....	20 ■
CUTTING DISCS.....	21 ■
GRINDING DISCS	21 ■
Solid Discs for Stone	
CUTTING DISCS.....	22 ■
Flap Discs	
.....	23 ■

SILVER LINE

Solid Discs for Steel	
THINNER CUTTING DISCS	28 ■
CUTTING DISCS	29 ■
GRINDING DISCS	31 ■
CUT-OFF DISCS	34 ■
Solid Discs for Stainless Steel	
THINNER CUTTING DISCS	36 ■
CUTTING DISCS	37 ■
GRINDING DISCS	38 ■
Solid Discs for Stainless Steel/Steel	
THINNER CUTTING DISCS	39 ■
CUTTING DISCS	41 ■
GRINDING DISCS	41 ■
Solid Discs for Stone	
THINNER CUTTING DISCS	42 ■
CUTTING DISCS	42 ■
GRINDING DISCS	43 ■
CUT-OFF DISCS	43 ■
Solid Discs for Granite	
CUTTING DISCS	44 ■
Solid Discs for Cast Iron	
GRINDING DISCS	44 ■
Flap Discs	
.....	46 ■
Mounted Flap Wheels	
.....	50 ■

PLATINUM LINE

Solid Discs for Stainless Steel/Steel	
THINNER CUTTING DISCS TWINCUT PLUS LINE	54 ■
Zirconia Solid Discs	
THINNER CUTTING DISCS FOR STEEL.....	56 ■
CUTTING DISCS FOR STEEL.....	56 ■
GRINDING DISCS FOR STEEL.....	57 ■
GRINDING DISCS FOR STEEL AND STAINLESS STEEL.....	58 ■
GRINDING DISCS FOR STEEL.....	58 ■

Flap Discs	59	■
Counterflange for flap discs with reinforced support	61	■
Mounted Flap Wheels	63	■

DIAMOND LINE

Solid Discs for Aluminium		
THINNER CUTTING DISCS	66	■
CUTTING DISCS	66	■
GRINDING DISCS	67	■
Flap Discs	68	■
Mounted Flap Wheels	75	■

WHEELS WITH BORE

THREADED BORE FLAP WHEELS	78	■
WHEELS WITH M14 THREADED BORE	80	■
SATINEX WHEELS	81	■

NON-WOVEN FABRIC

MOUNTED WHEELS	84	■
THREADED BORE FLAP WHEELS	86	■
SATINEX WHEELS	87	■
RADIAL DISCS	89	■
WASTE-FREE ROLLS	90	■
ABRASIVE SHEETS	91	■

POLISHING PRODUCTS

FELT FLAP DISCS AND WHEELS	94	■
FELT MOUNTED POINTS	95	■

VELCRO DISCS

VELCRO DISCS	98	■
BACKING PADS FOR VELCRO DISCS	102	■

FLEX DISCS

FIBER DISCS	104	■
BACKING PADS FOR FIBER DISCS	106	■
SEMI-FLEX DISCS	107	■

STRIPPING PRODUCTS

MOUNTED STRIPPING WHEELS	110	■
MOUNTED STRIPPING DISCS	110	■
THREADED BORE UNITIZED DISCS	111	■
THREADED BORE STRIPPING DISCS	112	■

ABRASIVE SPIROBANDS

SPIROBANDS	114	■
SPIROBAND HOLDER	115	■

WASTE-FREE ROLLS

.....	118	■
-------	-----	---

ABRASIVE BELTS

.....	122	■
-------	-----	---

ABRASIVE SHEETS

.....	124	■
-------	-----	---

MOUNTED POINTS FOR STEEL

CYLINDRICAL	126	■
CYLINDRICAL - TRUNCATED CONE	127	■
TRUNCATED CONE	127	■
ROUND NOSE CONE	128	■
CYLINDRICAL - POINTED TREE	128	■
CYLINDRICAL - STRAIGHT CONE	128	■
CYLINDRICAL WITH RADIUS END	129	■
BALL	129	■
KNIFE SHAPE	129	■
CYLINDRICAL - LONG SHAFT	130	■
BALL - LONG SHAFT	130	■

MOUNTED POINTS FOR STAINLESS STEEL

CYLINDRICAL	132	■
ROUND NOSE CONE	132	■
CYLINDRICAL - POINTED TREE	132	■

MOUNTED POINTS FOR CAST IRON








CYLINDRICAL	134	■
ROUND NOSE CONE	134	■
CYLINDRICAL - POINTED TREE	134	■

SHOP IN SHOP

.....	135	■
-------	-----	---

Guide to Solid Discs specifications



<p>230x3,2x22,23</p> <p>Dimensions in mm diameter x thickness x bore</p>	<p>9"x1/8"x7/8"</p> <p>Dimensions in inches diameter x thickness x bore</p>	<p>A30Q</p> <p>Specification</p>	<p>STAINLESS STEEL/STEEL</p> <p>Material on which disc is used</p>				
<p>MAX SPEED</p> <p>Maximum operating speed in m/s and rpm</p>	<p>SHELF LIFE</p> <p>Stamped on the metal ring for bore 22,23; printed on the label contour for the others bores.</p>	<table border="1"> <tr> <td data-bbox="826 1435 995 1570">A Aluminium Oxide</td> <td data-bbox="995 1435 1155 1570">C Silicon carbide</td> </tr> </table>	A Aluminium Oxide	C Silicon carbide	<p>Product bar code</p>  <p>8 4020935 12568551</p>		
A Aluminium Oxide	C Silicon carbide						
<p>Instructions for safety use</p> 	<p>AB000370230</p> <p>Article No.</p> <p>Fe/S/Cl < 0,1%</p>	<table border="1"> <tr> <td data-bbox="826 1637 995 1749">Z Zirconia</td> <td data-bbox="995 1637 1155 1749">30 Grit</td> </tr> <tr> <td data-bbox="826 1749 995 1861">Q Hardness</td> <td data-bbox="995 1749 1155 1861">BF Reinforced bakelite</td> </tr> </table>	Z Zirconia	30 Grit	Q Hardness	BF Reinforced bakelite	<p>Conformity with the standard</p> 
Z Zirconia	30 Grit						
Q Hardness	BF Reinforced bakelite						
<p>Do not use for deburring</p> 	<p>Use for deburring only</p> 	<p>Do not use damaged disc</p> 	<p>Do not use with hand-held power tools</p> 				

Guide to Flap Discs Specifications



115x22mm

Dimensions in mm diameter x bore



Product bar code



Instructions for safety use



EN 13743

Conformity with the standard

MAX SPEED

Maximum operating speed in m/s and rpm




AB001141004

Article No.



CLOTH BACKING PAD		
COTTON	POLYCOTTON	POLYESTERE
Versatile cloth, particularly suitable for not too heavy-duty rough grinding and finishing operations.	Stronger cloth than the classic cotton, suitable for heavier heavy-duty operations. Suitable to withstand a greater pressure on the work piece.	Extremely sturdy cloth, suitable for particularly heavy-duty operations involving a very high pressure on the work piece.


FLAT PROFILE



The flat profile Disc is used at a maximum angle of 15° and allows the machining of flat surfaces and edges.

In addition, by using the external part of the disc, more precise machining operations can be carried out.

CONICAL PROFILE



The conical profile Disc is used at an angle of between 15° and 25° and simplifies operations on uneven surfaces.

It provides a larger contact surface between the disc and the work surface.

It allows the use of the sheets until they are completely worn out.

NYLON BACKING PAD



The nylon backing pad texture bestows elasticity to the disc, mitigating and reducing vibrations during use.

FIBER GLASS BACKING PAD



The fiber glass backing pad has a more rigid texture that allows greater pressure on the disc. In addition, the backing pad reduces the possibility of any residual traces accidentally left on the material during machining operation.

Guide to Flap Discs Specifications


LINE SMART - LINE SILVER - LINE PLATINUM

DIAMETER/BORE (mm)	REVOLUTIONS PER MINUTE (Rpm)
115 x 22,23	13.300
125 x 22,23	12.200
180 x 22,23	8.600

LINE DIAMOND

DIAMETER/BORE (mm)	REVOLUTIONS PER MINUTE (Rpm)
115 x 22,23	10.500
125 x 22,23	9.650
180 x 22,23	8.600


SINGLE-FLAP

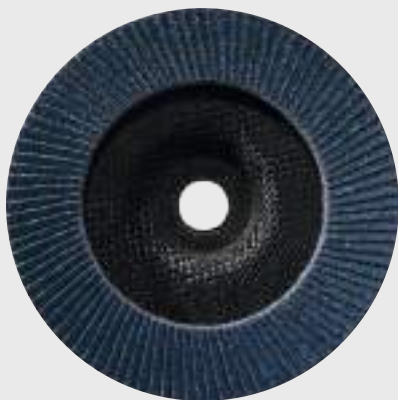

The single-flap version allows for less aggressive and more accurate machining operation.

Particularly suitable for targeted operations requiring highest levels of precision for the finishing of work surfaces.

DOUBLE-FLAP

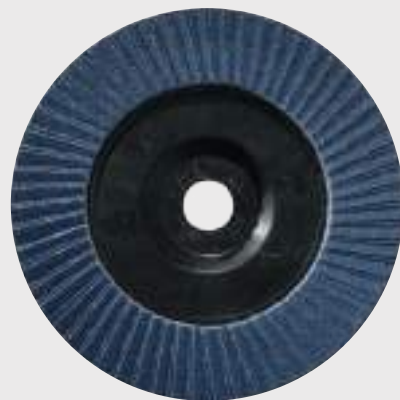

The double-flap version ensures more aggressiveness and higher disc cut rate.

Particularly suitable for heavier heavy-duty operations requiring high pressure on the work surfaces.

The Abra Beta Box



230x3,2x22,23

Dimensions in mm
diameter x thickness x bore

9"x1/8"x7/8"

Dimensions in inches
diameter x thickness x bore

A30Q

Specification

STAINLESS STEEL/STEEL

Material on which disc is used

AB000370230

Article No.

shelf life

Shelf life

A

Aluminium
Oxide

C

Silicon
carbide

Product bar
Code



8 020935 1256855

Z

Zirconia

30

Grit

Q

Hardness

BF

Reinforced
Bakelite

Pcs per
package



Product profile

Instructions for safety use



CERTIFICATIONS



abrabetta.it

The Smart Line discs
are designed for less
heavy and specialized use,
but still professional.
100% Made in Italy.





**SMART
LINE**



A36R



APPLICATION

Universal use for cutting non-treated steels.

Accurate and concentrated material removal that reduces the power consumption of the power tool.

Minimized burr formation.

FEATURES


CUTTING SPEED



SERVICE LIFE




RECOMMENDED USE




Angle grinder


THINNER CUTTING DISCS - Flat Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000700115	115	1,0	22,23	13300	50
AB000700116	115	1,2	22,23	13300	50
AB000700118	115	1,6	22,23	13300	50
AB000700125	125	1,0	22,23	12200	50
AB000700126	125	1,2	22,23	12200	50
AB000700128	125	1,6	22,23	12200	50
AB000700230	230	2,0	22,23	6600	25

THINNER CUTTING DISCS - Depressed Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000701230	230	2,0	22,23	6600	25

A30R



APPLICATION

For cutting normal and medium alloy steels.

Also suitable for cutting heavy-duty cast irons.

The use of high power grinders for cutting medium-large sections is recommended.

FEATURES


CUTTING SPEED



SERVICE LIFE





RECOMMENDED USE



Angle grinder

CUTTING DISCS - Depressed Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000720115	115	3,2	22,23	13300	50
AB000720125	125	3,2	22,23	12200	50
AB000720233	230	3,0	22,23	6600	25

A24P



APPLICATION

For deburring steels with extended grinding surfaces and heavy-duty cast irons.

FEATURES


MATERIAL REMOVAL RATE




SERVICE LIFE



RECOMMENDED USE



Angle grinder



GRINDING DISCS - Depressed Centre

Article No.	Diameter	Thickness	Bore	Max RPM	
AB000730115	115	6,4	22,23	13300	50
AB000730125	125	6,4	22,23	12200	50
AB000730230	230	6,4	22,23	6600	25

ZA20RE



APPLICATION

Universal use for deburring steels and cast irons.

FEATURES


MATERIAL REMOVAL RATE



SERVICE LIFE




RECOMMENDED USE



Angle grinder

THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED



ZIRCONIA GRINDING DISCS - Depressed Centre

Article No.	Diameter	Thickness	Bore	Max RPM	
AB000750115	115	6,5	22,23	13300	50
AB000750125	125	6,5	22,23	12200	50
AB000750230	230	7,0	22,23	6600	25



Solid Discs for Stainless Steel

A36M



APPLICATION

For cutting stainless steels, steel alloys and treated steels.

Accurate and concentrated material removal that reduces the power consumption of the power tool.

Minimum heating of the disc.

Minimized burr formation.

FEATURES


CUTTING SPEED



SERVICE LIFE




RECOMMENDED USE




Angle grinder

THINNER CUTTING DISCS - Flat Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000760115	115	1,0	22,23	13300	50
AB000760116	115	1,2	22,23	13300	50
AB000760118	115	1,6	22,23	13300	50
AB000760125	125	1,0	22,23	12200	50
AB000760126	125	1,2	22,23	12200	50
AB000760128	125	1,6	22,23	12200	50
AB000760230	230	2,0	22,23	6600	25

THINNER CUTTING DISCS - Depressed Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000761230	230	2,0	22,23	6600	25

A30M



APPLICATION

For cutting stainless steels and steel alloys.

Also suitable for cutting hard cast irons.

FEATURES


CUTTING SPEED




SERVICE LIFE



RECOMMENDED USE



Angle grinder



CUTTING DISCS - Depressed Centre

Article No.	Diameter	Thickness	Bore	Max RPM	
AB000770115	115	3,2	22,23	13300	50
AB000770125	125	3,2	22,23	12200	50
AB000770233	230	3,0	22,23	6600	25

A240



APPLICATION

For deburring stainless steels.

Also suitable for deburring hard cast irons.

FEATURES


MATERIAL REMOVAL RATE




SERVICE LIFE



RECOMMENDED USE



Angle grinder



GRINDING DISCS - Depressed Centre

Article No.	Diameter	Thickness	Bore	Max RPM	
AB000780115	115	6,4	22,23	13300	50
AB000780125	125	6,4	22,23	12200	50
AB000780230	230	6,4	22,23	6600	25

Solid Discs for Stone

C30R



APPLICATION

For cutting stone, marble and concrete.

FEATURES


CUTTING SPEED



SERVICE LIFE





RECOMMENDED USE



Angle grinder

CUTTING DISCS - Depressed Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000790115	115	3,2	22,23	13300	50
AB000790230	230	3,0	22,23	6600	25

The Smart Cutting and Grinding Discs Line guarantees exceptionally competitive prices on a wide range of superior quality products suitable for all main types of machining.






ZIRCONIA CLOTH Cotton Backing Pad



APPLICATION


For a wide variety of not too heavy-duty machining operations on stainless steels, ferrous and non-ferrous metals.


RECOMMENDED USE



Angle grinder

NYLON BACKING PAD - Flat Profile



Article No.	Diameter	Grit	Type	
AB001000004	115	40	SINGLE-FLAP	20
AB001000006	115	60	SINGLE-FLAP	20
AB001000008	115	80	SINGLE-FLAP	20
AB001000012	115	120	SINGLE-FLAP	20
AB001000024	115	40	DOUBLE-FLAP	20
AB001000026	115	60	DOUBLE-FLAP	20
AB001000028	115	80	DOUBLE-FLAP	20
AB001000032	115	120	DOUBLE-FLAP	20
AB001000104	125	40	SINGLE-FLAP	20
AB001000106	125	60	SINGLE-FLAP	20
AB001000108	125	80	SINGLE-FLAP	20
AB001000112	125	120	SINGLE-FLAP	20
AB001000124	125	40	DOUBLE-FLAP	20
AB001000126	125	60	DOUBLE-FLAP	20
AB001000128	125	80	DOUBLE-FLAP	20
AB001000132	125	120	DOUBLE-FLAP	20



Flap Discs


ZIRCONIA CLOTH Cotton backing pad



APPLICATION


For a wide variety of not too heavy-duty machining operations on stainless steels, ferrous and non-ferrous metals.


RECOMMENDED USE




Angle grinder


FIBER GLASS BACKING PAD - Flat Profile



Article No.	Diameter	Grit	Type	
AB001000304	115	40	SINGLE-FLAP	20
AB001000306	115	60	SINGLE-FLAP	20
AB001000308	115	80	SINGLE-FLAP	20
AB001000312	115	120	SINGLE-FLAP	20
AB001000324	115	40	DOUBLE-FLAP	20
AB001000326	115	60	DOUBLE-FLAP	20
AB001000328	115	80	DOUBLE-FLAP	20
AB001000332	115	120	DOUBLE-FLAP	20
AB001000404	125	40	SINGLE-FLAP	20
AB001000406	125	60	SINGLE-FLAP	20
AB001000408	125	80	SINGLE-FLAP	20
AB001000412	125	120	SINGLE-FLAP	20
AB001000424	125	40	DOUBLE-FLAP	20
AB001000426	125	60	DOUBLE-FLAP	20
AB001000428	125	80	DOUBLE-FLAP	20
AB001000432	125	120	DOUBLE-FLAP	20

FIBER GLASS BACKING PAD - Conical Profile



Article No.	Diameter	Grit	Type	
AB001000504	115	40	SINGLE-FLAP	20
AB001000506	115	60	SINGLE-FLAP	20
AB001000508	115	80	SINGLE-FLAP	20
AB001000512	115	120	SINGLE-FLAP	20
AB001000604	125	40	SINGLE-FLAP	20
AB001000606	125	60	SINGLE-FLAP	20
AB001000608	125	80	SINGLE-FLAP	20
AB001000612	125	120	SINGLE-FLAP	20


ALUMINIUM OXIDE CLOTH
Cotton backing pad



APPLICATION


Universal use for not too heavy-duty machining operations on ferrous and non-ferrous metals and wood.


RECOMMENDED USE



Angle grinder

NYLON BACKING PAD - Flat Profile



Article No.	Diameter	Grit	Type	
AB001100004	115	40	SINGLE-FLAP	20
AB001100006	115	60	SINGLE-FLAP	20
AB001100024	115	40	DOUBLE-FLAP	20
AB001100026	115	60	DOUBLE-FLAP	20
AB001100104	125	40	SINGLE-FLAP	20
AB001100106	125	60	SINGLE-FLAP	20
AB001100124	125	40	DOUBLE-FLAP	20
AB001100126	125	60	DOUBLE-FLAP	20

The Smart Flap Discs line, designed for not too heavy-duty machining operations, proposes reliable and extremely economically competitive products guaranteed by the superior Made in Italy quality of Abra Beta.



abrabeta.it

**The Silver Disc Line
guarantees an excellent
price-quality ratio.
The wide variety of products
available makes it particularly
versatile and ideal for all
high performance machining
operations.**





SILVER LINE





Solid Discs for Steel

A36S



APPLICATION

Universal use for cutting non-treated steels.

Accurate and concentrated material removal that reduces the power consumption of the power tool.

Minimized burr formation.

FEATURES


CUTTING SPEED



SERVICE LIFE




RECOMMENDED USE




Angle grinder

THINNER CUTTING DISCS - Flat Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000010062	65	1,0	10,00	23500	50
AB000010066	65	1,5	10,00	23500	50
AB000010069	65	2,0	10,00	23500	50
AB000010070	76	1,0	6,00	20100	50
AB000010072	76	1,0	10,00	20100	50
AB000010076	76	1,5	10,00	20100	50
AB000010079	76	2,0	10,00	20100	50
AB000010100	100	1,2	15,88	15300	50
AB000010115	115	1,0	22,23	13300	50
AB000010117	115	1,2	22,23	13300	50
AB000010119	115	1,6	22,23	13300	50
AB000010125	125	1,0	22,23	12200	50
AB000010127	125	1,2	22,23	12200	50
AB000010129	125	1,6	22,23	12200	50
AB000010150	150	1,6	22,23	10200	50
AB000010180	180	2,0	22,23	8500	25
AB000010230	230	2,0	22,23	6600	25

THINNER CUTTING DISCS - Depressed Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000020230	230	2,0	22,23	6600	25

A30S



APPLICATION

For cutting normal and medium alloy steels.

Also suitable for cutting heavy-duty cast irons.

The use of high power grinders for cutting medium-large sections is recommended.

FEATURES


CUTTING SPEED



SERVICE LIFE




RECOMMENDED USE



Angle grinder

CUTTING DISCS - Depressed Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000050076	76	3,2	10,00	20100	50
AB000050100	100	3,2	15,88	15300	50
AB000050115	115	3,2	22,23	13300	50
AB000050125	125	3,2	22,23	12200	50
AB000050150	150	3,2	22,23	10200	50
AB000050180	180	3,2	22,23	8500	25
AB000050230	230	3,2	22,23	6600	25

A30T



APPLICATION

For cutting normal and medium alloy steels.

The use of high power grinders for cutting medium-large sections is recommended.

The higher abrasive hardness grants a longer service life of the disc.

FEATURES


CUTTING SPEED



SERVICE LIFE




RECOMMENDED USE



Angle grinder

CUTTING DISCS - Depressed Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000051115	115	2,5	22,23	13300	50
AB000051118	115	3,2	22,23	13300	50
AB000051125	125	2,5	22,23	12200	50
AB000051128	125	3,2	22,23	12200	50
AB000051150	150	2,5	22,23	10200	50
AB000051180	180	2,5	22,23	8500	25
AB000051230	230	2,5	22,23	6600	25
AB000051233	230	3,2	22,23	6600	25



Solid Discs for Steel

A30S



APPLICATION

For cutting normal and medium alloy steels.

Also suitable for cutting heavy-duty cast irons.

The use of high power grinders for cutting medium-large sections is recommended.

FEATURES


CUTTING SPEED



SERVICE LIFE





RECOMMENDED USE



Angle grinder

CUTTING DISCS - Flat Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000040076	76	3,2	10,00	20100	50
AB000040115	115	3,2	22,23	13300	50
AB000040125	125	3,2	22,23	12200	50
AB000040230	230	3,2	22,23	6600	25

A30T



APPLICATION

For cutting normal and medium alloy steels.

The use of high power grinders for cutting medium-large sections is recommended.

The higher abrasive hardness grants a longer service life of the disc.

FEATURES


CUTTING SPEED



SERVICE LIFE





RECOMMENDED USE



Angle grinder

CUTTING DISCS - Flat Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000041115	115	2,5	22,23	13300	50
AB000041125	125	2,5	22,23	12200	50
AB000041180	180	2,5	22,23	8500	25
AB000041230	230	2,5	22,23	6600	25

A24N



APPLICATION

For deburring steels with extended grinding surfaces and heavy-duty cast irons.

FEATURES


MATERIAL REMOVAL RATE




SERVICE LIFE




RECOMMENDED USE



Angle grinder



GRINDING DISCS - Depressed Centre

Article No.	Diameter	Thickness	Bore	Max RPM	
AB000070076	76	6,5	10,00	20100	50
AB000070106	100	6,5	15,88	15300	50
AB000070115	115	4,5	22,23	13300	50
AB000070118	115	6,5	22,23	13300	50
AB000070126	125	4,5	22,23	12200	50
AB000070128	125	6,5	22,23	12200	50
AB000070154	150	4,5	22,23	10200	25
AB000070156	150	6,5	22,23	10200	25
AB000070184	180	4,5	22,23	8500	25
AB000070186	180	6,5	22,23	8500	25
AB000070234	230	4,5	22,23	6600	20
AB000070236	230	6,5	22,23	6600	25
AB000070238	230	8,0	22,23	6600	20





Solid Discs for Steel

A24R



APPLICATION

For deburring steels on weld seams and sharp edges.

The higher abrasive hardness grants a longer service life of the disc.

FEATURES


MATERIAL REMOVAL RATE



SERVICE LIFE





RECOMMENDED USE



Angle grinder

GRINDING DISCS - Depressed Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000071115	115	6,5	22,23	13300	50
AB000071125	125	6,5	22,23	12200	50
AB000071150	150	6,5	22,23	10200	25
AB000071180	180	6,5	22,23	8500	25
AB000071230	230	6,5	22,23	6600	25

A24S



APPLICATION

For deburring steels on weld seams and sharp edges.

The extreme abrasive hardness maximizes the disc service life.

FEATURES


MATERIAL REMOVAL RATE



SERVICE LIFE




RECOMMENDED USE




Angle grinder

THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED

GRINDING DISCS - Depressed Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000072115	115	6,5	22,23	13300	50
AB000072150	150	6,5	22,23	10200	25
AB000072230	230	6,5	22,23	6600	25

A24N



APPLICATION

For deburring steels with extended grinding surfaces and heavy-duty cast irons.

The use of grinders equipped for conical profile is required.

FEATURES


MATERIAL REMOVAL RATE




SERVICE LIFE




RECOMMENDED USE



Angle grinder



GRINDING DISCS - Conical Depressed Centre

Article No.	Diameter	Thickness	Bore	Max RPM	
AB000080125	125	6,5	22,23	12200	40
AB000080230	230	6,5	22,23	6600	20



Solid Discs for Steel

A46N



APPLICATION

For cutting small and medium size steels.

The use of single-phase bench machines is required.

FEATURES


CUTTING SPEED



SERVICE LIFE





RECOMMENDED USE



Single-phase bench cut-off machine

CUT-OFF DISCS 63 M/S - Flat Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000090300	300	2,5	25,40	4010	25
AB000090350	350	3,0	25,40	3440	10
AB000090400	400	3,2	25,40	3010	10

A24N



APPLICATION

Universal use for cutting steels.

The use of medium and/or high power stationary cut-off machines is required.

FEATURES


CUTTING SPEED



SERVICE LIFE





RECOMMENDED USE



3-Phase bench cut-off machine

CUT-OFF DISCS 80 M/S - Flat Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000091300	300	3,8	22,23	5100	25
AB000091303	300	3,8	25,40	5100	25
AB000091306	300	3,8	30,00	5100	25
AB000091350	350	4,2	25,40	4400	10
AB000091353	350	4,2	30,00	4400	10
AB000091400	400	4,5	25,40	3800	10
AB000091403	400	4,5	30,00	3800	10
AB000091406	400	4,5	40,00	3800	10

A30S



APPLICATION

Universal use for cutting steels.

The use of hand-held combustion engine machines is required.

FEATURES


CUTTING SPEED



SERVICE LIFE





RECOMMENDED USE



Hand-held combustion engine cut-off machine

CUT-OFF DISCS 100 M/S - Flat Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000092300	300	3,8	20,00	6370	25
AB000092350	350	4,2	20,00	5460	10
AB000092356	350	4,2	25,40	5460	10
AB000092400	400	4,5	25,40	4800	10





Solid Discs for Stainless Steel

A36N



APPLICATION

For cutting stainless steels, steel alloys and treated steels.

Accurate and concentrated material removal that reduces the power consumption of the power tool.

Minimum heating of the disc.

Minimized burr formation.

FEATURES


CUTTING SPEED



SERVICE LIFE





RECOMMENDED USE




Angle grinder


THINNER CUTTING DISCS - Flat Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000200071	76	1,0	10,00	20100	50
AB000200074	76	1,6	10,00	20100	50
AB000200100	100	1,2	15,88	15300	50
AB000200105	100	1,6	15,88	15300	50
AB000200115	115	1,0	22,23	13300	50
AB000200116	115	1,2	22,23	13300	50
AB000200118	115	1,6	22,23	13300	50
AB000200125	125	1,0	22,23	12200	50
AB000200126	125	1,2	22,23	12200	50
AB000200128	125	1,6	22,23	12200	50
AB000200150	150	1,6	22,23	10200	50
AB000200180	180	2,0	22,23	8500	25
AB000200230	230	2,0	22,23	6600	25

THINNER CUTTING DISCS - Depressed Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000210230	230	2,0	22,23	6600	25

A36N



APPLICATION

For cutting stainless steels and steel alloys.

Also suitable for cutting hard cast irons.

FEATURES


CUTTING SPEED



SERVICE LIFE




RECOMMENDED USE




Angle grinder

CUTTING DISCS - Depressed Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000240102	100	3,2	15,88	15300	50
AB000240115	115	2,5	22,23	13300	50
AB000240117	115	3,2	22,23	13300	50
AB000240125	125	2,5	22,23	12200	50
AB000240127	125	3,2	22,23	12200	50
AB000240150	150	2,5	22,23	10200	50
AB000240152	150	3,2	22,23	10200	50
AB000240230	230	2,5	22,23	6600	25
AB000240232	230	3,2	22,23	6600	25

CUTTING DISCS - Flat Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000230115	115	2,5	22,23	13300	50
AB000230125	125	2,5	22,23	12200	50
AB000230230	230	2,5	22,23	6600	25



Solid Discs for Stainless Steel

A30P



APPLICATION

For deburring stainless steels.
Also suitable for deburring hard cast irons.

FEATURES


MATERIAL REMOVAL RATE



SERVICE LIFE





RECOMMENDED USE



Angle grinder

GRINDING DISCS - Depressed Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000260100	100	6,5	15,88	15300	50
AB000260115	115	6,5	22,23	13300	50
AB000260125	125	6,5	22,23	12200	50
AB000260150	150	6,5	22,23	10200	25
AB000260180	180	6,5	22,23	8500	25
AB000260230	230	6,5	22,23	6600	25

Solid Discs for Stainless Steel/Steel

A46Q



APPLICATION

Universal use for cutting stainless steels, steel alloys and treated and non-treated steels.

Minimized burr formation

FEATURES


CUTTING SPEED



SERVICE LIFE




RECOMMENDED USE



Angle grinder

THINNER CUTTING DISCS - Flat Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000300115	115	1,0	22,23	13300	50
AB000300116	115	1,2	22,23	13300	50
AB000300118	115	1,6	22,23	13300	50
AB000300125	125	1,0	22,23	12200	50
AB000300126	125	1,2	22,23	12200	50
AB000300128	125	1,6	22,23	12200	50
AB000300150	150	1,6	22,23	10200	50

A36Q



APPLICATION

Universal use for cutting stainless steels, steel alloys and treated and non-treated steels.

FEATURES


CUTTING SPEED



SERVICE LIFE




RECOMMENDED USE



Angle grinder

THINNER CUTTING DISCS - Flat Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000300230	230	2,0	22,23	6600	25



Solid Discs for Stainless Steel/Steel

A46S



APPLICATION

Universal use for cutting stainless steels, steel alloys and treated and non-treated steels.

Minimum heating of the disc.

Exceptionally rapid and accurate cutting.

FEATURES


CUTTING SPEED



SERVICE LIFE





RECOMMENDED USE



Angle grinder

THINNER CUTTING DISCS - Depressed Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000310115	115*	0,9	22,23	13300	50
AB000310125	125*	0,9	22,23	12200	50

*Clamping the safety flange to the disc is recommended. Each package contains a flange included in the price.

A36Q



APPLICATION

Universal use for cutting stainless steels, steel alloys and treated and non treated steels.

FEATURES


CUTTING SPEED



SERVICE LIFE





RECOMMENDED USE



Angle grinder

THINNER CUTTING DISCS - Depressed Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000310230	230	2,0	22,23	6600	25

A30Q



APPLICATION

For cutting steels, stainless steels, steel alloys and medium alloy steels, heavy-duty and hard cast irons.

FEATURES


CUTTING SPEED



SERVICE LIFE




RECOMMENDED USE



Angle grinder

CUTTING DISCS - Depressed Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000370115	115	3,2	22,23	13300	50
AB000370125	125	3,2	22,23	12200	50
AB000370150	150	3,2	22,23	10200	50
AB000370180	180	3,2	22,23	8500	25
AB000370230	230	3,2	22,23	6600	25

A24Q



APPLICATION

For deburring steels, stainless steels and heavy-duty cast irons.

Suitable for deburring on extended surfaces.

FEATURES


MATERIAL REMOVAL RATE



SERVICE LIFE




RECOMMENDED USE



Angle grinder

GRINDING DISCS - Depressed Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000380115	115	6,5	22,23	13300	50
AB000380125	125	6,5	22,23	12200	50
AB000380150	150	6,5	22,23	10200	25
AB000380180	180	6,5	22,23	8500	25
AB000380230	230	6,5	22,23	6600	25



Solid Discs for Stone

C36S



APPLICATION

For cutting stone, marble and concrete.

FEATURES


CUTTING SPEED



SERVICE LIFE





RECOMMENDED USE



Angle grinder

THINNER CUTTING DISCS FOR STONE - Flat Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000500115	115	1,6	22,23	13300	50
AB000500230	230	2,0	22,23	6600	25

C30S



APPLICATION

For cutting stone, marble and concrete.

FEATURES


CUTTING SPEED



SERVICE LIFE





RECOMMENDED USE



Angle grinder

CUTTING DISCS FOR STONE - Depressed Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000560115	115	2,5	22,23	13300	50
AB000560118	115	3,2	22,23	13300	50
AB000560128	125	3,2	22,23	12200	50
AB000560233	230	3,2	22,23	6600	25

C24R



APPLICATION

For deburring stone, marble and concrete.

FEATURES


MATERIAL REMOVAL RATE




SERVICE LIFE




RECOMMENDED USE



Angle grinder



GRINDING DISCS FOR STONE - Depressed Centre

Article No.	Diameter	Thickness	Bore	Max RPM	
AB000570115	115	6,5	22,23	13300	50
AB000570125	125	6,5	22,23	12200	50
AB000570230	230	6,5	22,23	6600	25

C30S



APPLICATION

For cutting stone, marble and concrete.

The use of hand-held combustion engine cut-off machines is required.

FEATURES


CUTTING SPEED




SERVICE LIFE




RECOMMENDED USE



Hand-held combustion engine cut-off machine



CUT-OFF DISCS FOR STONE 100 M/S - Flat Centre

Article No.	Diameter	Thickness	Bore	Max RPM	
AB000581300	300	3,8	20,00	6370	25
AB000581302	300	3,8	22,23	6370	25
AB000581350	350	4,2	20,00	5460	10



Solid Discs for Granite

C30P



APPLICATION

For cutting granite and concrete.

FEATURES


CUTTING SPEED



SERVICE LIFE





RECOMMENDED USE



Angle grinder

CUTTING DISCS FOR GRANITE - Depressed Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000561230	230	3,2	22,23	6600	25



Solid Discs for Cast Iron

C24Q



APPLICATION

For deburring all types of cast iron.

FEATURES


MATERIAL REMOVAL RATE



SERVICE LIFE





RECOMMENDED USE



Angle grinder

GRINDING DISCS - Depressed Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000670115	115	6,5	22,23	13300	50
AB000670125	125	6,5	22,23	12200	50
AB000670230	230	6,5	22,23	6600	25





Flap Discs

ZIRCONIA CLOTH Cotton Backing Pad




APPLICATION

For operations on stainless steels, ferrous and non-ferrous metals.

Coarse grits are suitable for grinding and rough grinding operations, fine grits are particularly suitable for finishing operations.


RECOMMENDED USE



Angle grinder

NYLON BACKING PAD - Flat Profile



Article No.	Diameter	Grit	Type	
AB001010004	115	40	SINGLE-FLAP	20
AB001010006	115	60	SINGLE-FLAP	20
AB001010008	115	80	SINGLE-FLAP	20
AB001010012	115	120	SINGLE-FLAP	20
AB001010024	115	40	DOUBLE-FLAP	20
AB001010026	115	60	DOUBLE-FLAP	20
AB001010028	115	80	DOUBLE-FLAP	20
AB001010032	115	120	DOUBLE-FLAP	20
AB001010104	125	40	SINGLE-FLAP	20
AB001010106	125	60	SINGLE-FLAP	20
AB001010108	125	80	SINGLE-FLAP	20
AB001010124	125	40	DOUBLE-FLAP	20
AB001010126	125	60	DOUBLE-FLAP	20
AB001010128	125	80	DOUBLE-FLAP	20
AB001010204	180	40	DOUBLE-FLAP	10
AB001010206	180	60	DOUBLE-FLAP	10

ZIRCONIA CLOTH
Cotton backing pad




APPLICATION

For operations on stainless steels, ferrous and non-ferrous metals.

Coarse grits are suitable for grinding and rough grinding operations, fine grits are particularly suitable for finishing operations.

RECOMMENDED USE




Angle grinder

FIBER GLASS BACKING PAD - Flat Profile



Article No.	Diameter	Grit	Type	
AB001010304	115	40	SINGLE-FLAP	20
AB001010306	115	60	SINGLE-FLAP	20
AB001010308	115	80	SINGLE-FLAP	20
AB001010312	115	120	SINGLE-FLAP	20
AB001010324	115	40	DOUBLE-FLAP	20
AB001010326	115	60	DOUBLE-FLAP	20
AB001010404	125	40	SINGLE-FLAP	20
AB001010406	125	60	SINGLE-FLAP	20
AB001010408	125	80	SINGLE-FLAP	20
AB001010412	125	120	SINGLE-FLAP	20
AB001010424	125	40	DOUBLE-FLAP	20
AB001010426	125	60	DOUBLE-FLAP	20
AB001010504	180	40	SINGLE-FLAP	10
AB001010506	180	60	SINGLE-FLAP	10

FIBER GLASS BACKING PAD - Conical Profile



Article No.	Diameter	Grit	Type	
AB001020004	115	40	SINGLE-FLAP	20
AB001020006	115	60	SINGLE-FLAP	20
AB001020008	115	80	SINGLE-FLAP	20
AB001020012	115	120	SINGLE-FLAP	20
AB001020104	125	40	SINGLE-FLAP	20
AB001020106	125	60	SINGLE-FLAP	20
AB001020108	125	80	SINGLE-FLAP	20
AB001020112	125	120	SINGLE-FLAP	20
AB001020204	180	40	SINGLE-FLAP	10
AB001020206	180	60	SINGLE-FLAP	10



Flap Discs

ZIRCONIA CLOTH Cotton backing pad




APPLICATION

Professional discs featuring more flaps, larger in size, thus granting 35% extra abrasive material on the disc.

For particularly heavy-duty operations on stainless steels.

Also suitable for heavy-duty operations on ferrous and non-ferrous metals.


RECOMMENDED USE



Angle grinder

BIGGER LINE - GLASS FIBER BACKING PAD - Flat Profile



Article No.	Diameter	Grit	Type	
AB001010804	115	40	SINGLE-FLAP	20
AB001010806	115	60	SINGLE-FLAP	20
AB001010808	115	80	SINGLE-FLAP	20
AB001010854	125	40	SINGLE-FLAP	20
AB001010856	125	60	SINGLE-FLAP	20



Bigger Sheets



Standard Sheets


ALUMINIUM OXIDE CLOTH
Cotton backing pad



APPLICATION

For universal use on ferrous and non-ferrous metals and wood.

RECOMMENDED USE



Angle grinder

NYLON BACKING PAD - Flat Profile



Article No.	Diameter	Grit	Type	
AB001110004	115	40	SINGLE-FLAP	20
AB001110006	115	60	SINGLE-FLAP	20
AB001110008	115	80	SINGLE-FLAP	20
AB001110012	115	120	SINGLE-FLAP	20
AB001110024	115	40	DOUBLE-FLAP	20
AB001110026	115	60	DOUBLE-FLAP	20
AB001110028	115	80	DOUBLE-FLAP	20
AB001110032	115	120	DOUBLE-FLAP	20
AB001110104	125	40	SINGLE-FLAP	20
AB001110106	125	60	SINGLE-FLAP	20
AB001110124	125	40	DOUBLE-FLAP	20
AB001110126	125	60	DOUBLE-FLAP	20
AB001110204	180	40	SINGLE-FLAP	10
AB001110206	180	60	SINGLE-FLAP	10



Mounted Flap Wheels

ALUMINIUM OXIDE CLOTH




APPLICATION

For particular machining operations on common ferrous and non-ferrous steels.

Particularly suitable for machining operations on materials with irregular and uneven surfaces, or in any case difficult to reach.


RECOMMENDED USE




Drill




Straight grinder

Article No.	Diameter	Height	Shaft	Grit	
AB001201063	10 - MICRO	10	3	60	25
AB001201563	15 - MICRO	15	3	60	25

Micro-wheels particularly suitable for machining operations requiring the highest level of precision.

Article No.	Diameter	Height	Shaft	Grit	
AB001203046	30	10	6	40	25
AB001203066	30	10	6	60	25
AB001203086	30	10	6	80	25
AB001203096	30	10	6	120	25
AB001203098	30	10	6	220	25
AB001203146	30	15	6	40	25
AB001203166	30	15	6	60	25
AB001203186	30	15	6	80	25
AB001203196	30	15	6	120	25
AB001203198	30	15	6	220	25
AB001203246	30	20	6	40	25
AB001203266	30	20	6	60	25
AB001203286	30	20	6	80	25
AB001203296	30	20	6	120	25
AB001203298	30	20	6	220	25
AB001204146	40	15	6	40	25
AB001204166	40	15	6	60	25
AB001204186	40	15	6	80	25
AB001204196	40	15	6	120	25
AB001204198	40	15	6	220	25
AB001204246	40	20	6	40	25
AB001204266	40	20	6	60	25
AB001204286	40	20	6	80	25
AB001204296	40	20	6	120	25
AB001204298	40	20	6	220	25
AB001204346	40	30	6	40	25
AB001204366	40	30	6	60	25
AB001204386	40	30	6	80	25
AB001204396	40	30	6	120	25
AB001204398	40	30	6	220	25

Article No.	Diameter	Height	Shaft	Grit	
AB001205246	50	20	6	40	25
AB001205266	50	20	6	60	25
AB001205286	50	20	6	80	25
AB001205296	50	20	6	120	25
AB001205298	50	20	6	220	25
AB001205346	50	30	6	40	25
AB001205366	50	30	6	60	25
AB001205386	50	30	6	80	25
AB001205396	50	30	6	120	25
AB001205398	50	30	6	220	25
AB001206246	60	20	6	40	25
AB001206266	60	20	6	60	25
AB001206286	60	20	6	80	25
AB001206296	60	20	6	120	25
AB001206298	60	20	6	220	25
AB001206346	60	30	6	40	25
AB001206366	60	30	6	60	25
AB001206386	60	30	6	80	25
AB001206396	60	30	6	120	25
AB001206398	60	30	6	220	25
AB001206446	60	40	6	40	25
AB001206466	60	40	6	60	25
AB001206486	60	40	6	80	25
AB001206496	60	40	6	120	25
AB001206498	60	40	6	220	25
AB001208364	80	30	6	40	25
AB001208366	80	30	6	60	25
AB001208386	80	30	6	80	25
AB001208396	80	30	6	120	25
AB001208398	80	30	6	220	25
AB001208546	80	50	6	40	25
AB001208566	80	50	6	60	25
AB001208586	80	50	6	80	25
AB001208596	80	50	6	120	25
AB001208598	80	50	6	220	25

abrabeta.it

The Platinum Discs Line proposes products of unquestionable quality, designed for extremely demanding professional users who only work with the highest quality products for their extremely heavy-duty and most ambitious machining operations.





PLATINUM LINE





Solid Discs for Stainless Steel/Steel

A46U



APPLICATION

Exceptionally high performance discs.

For use on stainless steels, steel alloys and treated and non-treated steels.

High level material removal combined with low disc consumption. Minimum heating of the disc during machining. Minimized burr formation.

FEATURES


CUTTING SPEED



SERVICE LIFE




RECOMMENDED USE




Angle grinder


THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED


THINNER CUTTING DISCS - Flat Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000330115	115	1,0	22,23	13300	50
AB000330116	115	1,2	22,23	13300	50
AB000330118	115	1,6	22,23	13300	50
AB000330125	125	1,0	22,23	12200	50
AB000330126	125	1,2	22,23	12200	50
AB000330128	125	1,6	22,23	12200	50
AB000330150	150	1,6	22,23	10200	50
AB000330180	180	2,0	22,23	8500	25
AB000330230	230	2,0	22,23	6600	25

THINNER CUTTING DISCS - Depressed Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000340230	230	2,0	22,23	6600	25

TWINCUT Plus



**MORE CUTS
...LESS TIME!**

ZA24R



APPLICATION

Universal use for deburring steels and cast irons.

FEATURES


MATERIAL REMOVAL RATE



SERVICE LIFE




RECOMMENDED USE




Angle grinder

THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED



GRINDING DISCS FOR STEEL - Depressed Centre

Article No.	Diameter	Thickness	Bore	Max RPM	
AB000120115	115	6,5	22,23	13300	50
AB000120125	125	6,5	22,23	12200	50
AB000120150	150	6,5	22,23	10200	25
AB000120180	180	7,0	22,23	8500	20
AB000120236	230	7,0	22,23	6600	25



ZA24P4 SOFT



APPLICATION

For deburring steels, stainless steels and cast irons.

The higher abrasive softness ensures high material removal rate.

FEATURES


MATERIAL REMOVAL RATE



SERVICE LIFE




RECOMMENDED USE



Angle grinder

THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED



GRINDING DISCS FOR STEEL and STAINLESS STEEL - Depressed Centre

Article No.	Diameter	Thickness	Bore	Max RPM	
AB000121230	230	7,0	22,23	6600	25

ZA24R4 MEDIUM



APPLICATION

For deburring steels and cast irons.

Excellent compromise between cut rate and service life of the disc.

FEATURES


MATERIAL REMOVAL RATE



SERVICE LIFE




RECOMMENDED USE



Angle grinder

THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED



GRINDING DISCS FOR STEEL - Depressed Centre

Article No.	Diameter	Thickness	Bore	Max RPM	
AB000122230	230	7,0	22,23	6600	25

ZA24S4 STRONG



APPLICATION

For deburring steels and cast irons.

The higher abrasive hardness grants a longer service life of the disc.

FEATURES


MATERIAL REMOVAL RATE



SERVICE LIFE




RECOMMENDED USE



Angle grinder

THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED



GRINDING DISCS FOR STEEL - Depressed Centre

Article No.	Diameter	Thickness	Bore	Max RPM	
AB000123230	230	7,0	22,23	6600	25



ZIRCONIA CLOTH Cotton backing pad




APPLICATION

Professional discs that can be used for operations on stainless steels, ferrous and non-ferrous metals.

Coarse grits are suitable for grinding and rough grinding operations, fine grits are particularly suitable for finishing operations.


RECOMMENDED USE



Angle grinder

NYLON BACKING PAD - Flat Profile



Article No.	Diameter	Grit	Type	
AB001050004	115	40	SINGLE-FLAP	20
AB001050006	115	60	SINGLE-FLAP	20
AB001050008	115	80	SINGLE-FLAP	20
AB001050012	115	120	SINGLE-FLAP	20
AB001050024	115	40	DOUBLE-FLAP	20
AB001050026	115	60	DOUBLE-FLAP	20
AB001050028	115	80	DOUBLE-FLAP	20
AB001050032	115	120	DOUBLE-FLAP	20
AB001050104	125	40	SINGLE-FLAP	20
AB001050106	125	60	SINGLE-FLAP	20
AB001050108	125	80	SINGLE-FLAP	20
AB001050124	125	40	DOUBLE-FLAP	20
AB001050126	125	60	DOUBLE-FLAP	20
AB001050128	125	80	DOUBLE-FLAP	20
AB001050204	180	40	DOUBLE-FLAP	10
AB001050206	180	60	DOUBLE-FLAP	10



Flap Discs

ZIRCONIA CLOTH Cotton backing pad




APPLICATION

Professional discs that can be used for operations on stainless steels, ferrous and non-ferrous metals.


Coarse grits are suitable for grinding and rough grinding operations, fine grits are particularly suitable for finishing operations.


RECOMMENDED USE




Angle grinder


FIBER GLASS BACKING PAD - Flat Profile



Article No.	Diameter	Grit	Type	
AB001050304	115	40	SINGLE-FLAP	20
AB001050306	115	60	SINGLE-FLAP	20
AB001050308	115	80	SINGLE-FLAP	20
AB001050312	115	120	SINGLE-FLAP	20
AB001050324	115	40	DOUBLE-FLAP	20
AB001050326	115	60	DOUBLE-FLAP	20
AB001050404	125	40	SINGLE-FLAP	20
AB001050406	125	60	SINGLE-FLAP	20
AB001050408	125	80	SINGLE-FLAP	20
AB001050412	125	120	SINGLE-FLAP	20
AB001050424	125	40	DOUBLE-FLAP	20
AB001050426	125	60	DOUBLE-FLAP	20
AB001050504	180	40	SINGLE-FLAP	10
AB001050506	180	60	SINGLE-FLAP	10

FIBER GLASS BACKING PAD - Conical Profile



Article No.	Diameter	Grit	Type	
AB001060004	115	40	SINGLE-FLAP	20
AB001060006	115	60	SINGLE-FLAP	20
AB001060008	115	80	SINGLE-FLAP	20
AB001060012	115	120	SINGLE-FLAP	20
AB001060104	125	40	SINGLE-FLAP	20
AB001060106	125	60	SINGLE-FLAP	20
AB001060108	125	80	SINGLE-FLAP	20
AB001060112	125	120	SINGLE-FLAP	20
AB001060124	125	40	DOUBLE-FLAP	20
AB001060126	125	60	DOUBLE-FLAP	20
AB001060128	125	80	DOUBLE-FLAP	20
AB001060204	180	40	SINGLE-FLAP	10
AB001060206	180	60	SINGLE-FLAP	10

ZIRCONIA CLOTH Cotton backing pad




APPLICATION

Professional discs that can be used for heavy-duty operations on stainless steels, ferrous and non-ferrous metals.


The reinforced backing pad and the large size sheets bestow exceptional pressure resistance to the disc in use and a very high cut rate.

RECOMMENDED USE




Angle grinder

THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED




REINFORCED NYLON BACKING PAD - Flat Profile

Article No.	Diameter	Grit	Type	
AB001070304	115	40	SINGLE-FLAP	20
AB001070306	115	60	SINGLE-FLAP	20
AB001070308	115	80	SINGLE-FLAP	20
AB001070324	115	40	DOUBLE-FLAP	20
AB001070326	115	60	DOUBLE-FLAP	20
AB001070328	115	80	DOUBLE-FLAP	20

*Clamping the counter flange to the disc is recommended. Each package contains a counter flange included in the price.


COUNTER FLANGE

Article No.	Diameter	
AB001070999	22,23	5

Positioning of the counterflange on the disc



Reinforced backing pad "Real Flat" perfectly flat

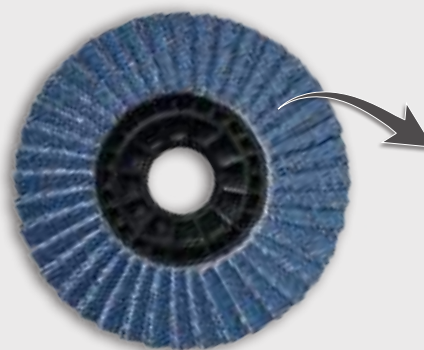

80 large size sheets, which bestow an extra **35%** of abrasive material to the disc compared to a traditional disc.



Flap Discs


ALUMINIUM OXIDE CLOTH Cotton backing pad



APPLICATION


For universal use on ferrous and non-ferrous metals and wood.


RECOMMENDED USE



Angle grinder

GLASS FIBER BACKING PAD - Flat Profile



Article No.	Diameter	Grit	Type	
AB001120004	115	40	SINGLE-FLAP	20
AB001120006	115	60	SINGLE-FLAP	20
AB001120008	115	80	SINGLE-FLAP	20
AB001120012	115	120	SINGLE-FLAP	20
AB001120024	115	40	DOUBLE-FLAP	20
AB001120026	115	60	DOUBLE-FLAP	20
AB001120104	125	40	SINGLE-FLAP	20
AB001120106	125	60	SINGLE-FLAP	20

They guarantee a higher quality machining on all surfaces, therefore Aluminium Oxide is the best abrasive.



Mounted Flap Wheels



ZIRCONIA CLOTH




APPLICATION

For particular machining operations on common ferrous and non-ferrous steels. Also suitable for operations on stainless steels.

Particularly suitable for machining operations on materials with irregular and uneven surfaces, or in any case difficult to reach.


RECOMMENDED USE



Drill



Straight grinder

Article No.	Diameter	Height	Shaft	Grit	
AB001213046	30	10	6	40	25
AB001213066	30	10	6	60	25
AB001213086	30	10	6	80	25
AB001213246	30	20	6	40	25
AB001213266	30	20	6	60	25
AB001213286	30	20	6	80	25
AB001214246	40	20	6	40	25
AB001214266	40	20	6	60	25
AB001214286	40	20	6	80	25
AB001214346	40	30	6	40	25
AB001214366	40	30	6	60	25
AB001214386	40	30	6	80	25
AB001215246	50	20	6	40	25
AB001215266	50	20	6	60	25
AB001215286	50	20	6	80	25
AB001215346	50	30	6	40	25
AB001215366	50	30	6	60	25
AB001215386	50	30	6	80	25
AB001216346	60	30	6	40	25
AB001216366	60	30	6	60	25
AB001216386	60	30	6	80	25
AB001218346	80	30	6	40	25
AB001218366	80	30	6	60	25
AB001218386	80	30	6	80	25

Particularly suitable for heavier heavy-duty machining operations on stainless steels and common ferrous and non-ferrous steels.



abrabeta.it

The Diamond Discs Line offers a varied selection of ultra-professional products designed for special machining operations that require the use of superior quality specific products.





DIAMOND LINE





Solid Discs for Aluminium

A30N



APPLICATION

For cutting aluminium, brass and bronze.

The abrasive lubrication prevents clogging during machining.

FEATURES


CUTTING SPEED



SERVICE LIFE





RECOMMENDED USE




Angle grinder


THINNER CUTTING DISCS - Flat Centre




Article No.	Diameter	Thickness	Bore	Max RPM	
AB000400112	115	1,2	22,23	13300	50
AB000400115	115	1,6	22,23	13300	50
AB000400125	125	1,6	22,23	12200	50
AB000400230	230	2,0	22,23	6600	25


THINNER CUTTING DISCS - Depressed Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000410230	230	2,0	22,23	6600	25

CUTTING DISCS - Depressed Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000450117	115	3,2	22,23	13300	50
AB000450125	125	2,5	22,23	12200	50
AB000450230	230	2,5	22,23	6600	25
AB000450233	230	3,2	22,23	6600	25

A30N



APPLICATION

For deburring aluminium, brass and bronze.

The abrasive lubrication prevents clogging during machining.

FEATURES


MATERIAL REMOVAL RATE



SERVICE LIFE





RECOMMENDED USE



Angle grinder

GRINDING DISCS - Depressed Centre



Article No.	Diameter	Thickness	Bore	Max RPM	
AB000460115	115	6,5	22,23	13300	50
AB000460125	125	6,5	22,23	12200	50
AB000460230	230	6,5	22,23	6600	25



Flap Discs

ZIRCONIA CLOTH Cotton backing pad




APPLICATION

Professional discs that can be used for operations on stainless steels, ferrous and non-ferrous metals.

Recommended for machining operations on shaped and angle surfaces.


The greater flexibility of the “Soft” sheets allows a lower overheating of the Disc and assures a lower aggressiveness compared to the traditional disc.


RECOMMENDED USE



Angle grinder

SOFT LINE - GLASS FIBER BACKING PAD - Flat Profile



Article No.	Diameter	Grit	Type	
AB001080004	115	40	SINGLE-FLAP	20
AB001080006	115	60	SINGLE-FLAP	20
AB001080008	115	80	SINGLE-FLAP	20
AB001080104	125	40	SINGLE-FLAP	20
AB001080106	125	60	SINGLE-FLAP	20
AB001080108	125	80	SINGLE-FLAP	20

The specific arrangement of the sheets in flex Zirconia Cloth allows the Soft flap discs to perform precise and targeted operations on work surfaces otherwise difficult to reach.



CERAMIC ABRASIVE CLOTH
Polyester backing pad



APPLICATION


Professional discs that can be used for operations on stainless steels, ferrous and non-ferrous metals.

Recommended for machining operations on shaped and angle surfaces.

The greater flexibility of the "Soft" sheets allows a lower overheating of the Disc and assures a lower aggressiveness compared to the traditional disc.

Cloth treated with grinding active additive to avoid overheating of the work surface.


RECOMMENDED USE




Angle grinder

THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED

SOFT LINE - GLASS FIBER BACKING PAD - Flat Profile



Article No.	Diameter	Grit	Type	
AB001080504	115	40	SINGLE-FLAP	20
AB001080506	115	60	SINGLE-FLAP	20
AB001080604	125	40	SINGLE-FLAP	20
AB001080606	125	60	SINGLE-FLAP	20

The specific arrangement of the sheets in flex ceramic abrasive cloth allows the Soft flap discs to perform precise and targeted operations on work surfaces otherwise difficult to reach.





Flap Discs

ZIRCONIA CLOTH Polycotton backing pad




APPLICATION

Professional discs featuring more flaps, larger in size, thus granting 35% extra abrasive material on the disc.

For particularly heavy-duty operations on stainless steels.

Also suitable for heavy-duty operations on ferrous and non-ferrous metals.


RECOMMENDED USE




Angle grinder


THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED


BIGGER LINE - GLASS FIBER BACKING PAD - Flat Profile



Article No.	Diameter	Grit	Type	
AB001090004	115	40	SINGLE-FLAP	20
AB001090006	115	60	SINGLE-FLAP	20
AB001090104	125	40	SINGLE-FLAP	20
AB001090106	125	60	SINGLE-FLAP	20
AB001090204	180	40	SINGLE-FLAP	10
AB001090206	180	60	SINGLE-FLAP	10

BIGGER LINE - GLASS FIBER BACKING PAD - Conical Profile



Article No.	Diameter	Grit	Type	
AB001090304	115	40	SINGLE-FLAP	20
AB001090306	115	60	SINGLE-FLAP	20
AB001090404	125	40	SINGLE-FLAP	20
AB001090406	125	60	SINGLE-FLAP	20



Bigger Sheets



Standard Sheets

CERAMIC-ZIRCONIA CLOTH

Polycotton backing pad




APPLICATION

Professional discs for heavy-duty operations for the removal of burrs and weld seams on hard metals and stainless steels.

Suitable to withstand a high pressure on the work surface.

Cloth treated with grinding active additive to avoid overheating of the work surface.


RECOMMENDED USE




Angle grinder

THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED

NYLON BACKING PAD - Flat Profile



Article No.	Diameter	Grit	Type	
AB001140004	115	40	SINGLE-FLAP	20
AB001140006	115	60	SINGLE-FLAP	20
AB001140104	125	40	SINGLE-FLAP	20
AB001140106	125	60	SINGLE-FLAP	20

CERAMIC-ZIRCONIA CLOTH

Polycotton backing pad




APPLICATION

Professional discs for heavy-duty operations for the removal of burrs and weld seams on hard metals and stainless steels.

Suitable to withstand a high pressure on the work surface.

Cloth treated with grinding active additive to avoid overheating of the work surface.


RECOMMENDED USE




Angle grinder

THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED

GLASS FIBER BACKING PAD - Flat Profile



Article No.	Diameter	Grit	Type	
AB001141004	115	40	SINGLE-FLAP	20
AB001141006	115	60	SINGLE-FLAP	20
AB001141104	125	40	SINGLE-FLAP	20
AB001141106	125	60	SINGLE-FLAP	20



Flap Discs

CERAMIC ABRASIVE CLOTH Polyester backing pad




APPLICATION

Professional discs for heavy-duty operations for the removal of burrs and weld seams on hardest metals.

Suitable to withstand an extremely high pressure on the work surface.


Cloth treated with grinding active additive to avoid overheating of the work surface.

RECOMMENDED USE




Angle grinder

THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED



NYLON BACKING PAD - Flat Profile

Article No.	Diameter	Grit	Type	
AB001150004	115	40	SINGLE-FLAP	20
AB001150006	115	60	SINGLE-FLAP	20
AB001150104	125	40	SINGLE-FLAP	20
AB001150106	125	60	SINGLE-FLAP	20

The Abra Beta Ceramic Abrasive flap discs are the highest quality level products of our range.



CERAMIC ABRASIVE CLOTH
Polyester backing pad




APPLICATION

Professional discs for heavy-duty operations for the removal of burrs and weld seams on hardest metals.
Suitable to withstand an extremely high pressure on the work surface.

Cloth treated with grinding active additive to avoid overheating of the work surface.


RECOMMENDED USE




Angle grinder


THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED


GLASS FIBER BACKING PAD - Flat Profile



Article No.	Diameter	Grit	Type	
AB001151004	115	40	SINGLE-FLAP	20
AB001151006	115	60	SINGLE-FLAP	20
AB001151104	125	40	SINGLE-FLAP	20
AB001151106	125	60	SINGLE-FLAP	20

GLASS FIBER BACKING PAD - Conical Profile



Article No.	Diameter	Grit	Type	
AB001152004	115	40	SINGLE-FLAP	20
AB001152006	115	60	SINGLE-FLAP	20
AB001152104	125	40	SINGLE-FLAP	20
AB001152106	125	60	SINGLE-FLAP	20

The top quality materials and the high skills used in manufacturing make these discs ideal to fully satisfy the most demanding professionals.





Flap Discs

STEARATE ALUMINIUM OXIDE CLOTH Polyester backing pad




APPLICATION

Use for machining operations on aluminium surfaces.

The treatment of the aluminium oxide cloth with stearate prevents problems of disc clogging and ensures a better discharge of machining waste.

Cloth treated with grinding active additive to avoid overheating of the work surface.


RECOMMENDED USE




Angle grinder


THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED


GLASS FIBER BACKING PAD - Flat Profile



Article No.	Diameter	Grit	Type	
AB001160004	115	40	SINGLE-FLAP	20
AB001160006	115	60	SINGLE-FLAP	20
AB001160104	125	40	SINGLE-FLAP	20
AB001160106	125	60	SINGLE-FLAP	20

GLASS FIBER BACKING PAD - Conical Profile



Article No.	Diameter	Grit	Type	
AB001161004	115	40	SINGLE-FLAP	20
AB001161006	115	60	SINGLE-FLAP	20
AB001161104	125	40	SINGLE-FLAP	20
AB001161106	125	60	SINGLE-FLAP	20



CERAMIC-ABRASIVE CLOTH




APPLICATION

For particular machining operations on common ferrous and non-ferrous steels.

Particularly suitable for machining operations on materials with irregular and uneven surfaces, or in any case difficult to reach.

Cloth treated with grinding active additive to avoid overheating of the work surface.

RECOMMENDED USE




Drill



Straight grinder

THE USE OF HIGH POWER TOOLS IS STRONGLY RECOMMENDED

Article No.	Diameter	Height	Shaft	Grit	
AB001223246	30	20	6	40	25
AB001223266	30	20	6	60	25
AB001224346	40	30	6	40	25
AB001224366	40	30	6	60	25
AB001225346	50	30	6	40	25
AB001225366	50	30	6	60	25
AB001226346	60	30	6	40	25
AB001226366	60	30	6	60	25
AB001228346	80	30	6	40	25
AB001228366	80	30	6	60	25

Particularly suitable for extremely heavy-duty machining operations on stainless steels and common ferrous and non-ferrous steels. The higher rigidity of the cloth ensures excellent resistance to friction of the work piece.

abrabeta.it





WHEELS WITH BORE





Threaded Bore Flap Wheels

STANDARD SHEETS ALUMINIUM OXIDE CLOTH




APPLICATION

For smoothing, finishing and cleaning operations on metal and stainless steel surfaces.

Also suitable for smoothing operations on wood surfaces and cleaning operations on plastic surfaces.


RECOMMENDED USE



Bench grinder



Straight grinder

Article No.	Diameter	Height	Bore	Grit	
AB001300004	165	30	54	40	3
AB001300006	165	30	54	60	3
AB001300008	165	30	54	80	3
AB001300012	165	30	54	120	3
AB001300018	165	30	54	180	3
AB001300022	165	30	54	220	3
AB001300104	165	50	54	40	2
AB001300106	165	50	54	60	2
AB001300108	165	50	54	80	2
AB001300112	165	50	54	120	2
AB001300118	165	50	54	180	2
AB001300122	165	50	54	220	2
AB001300204	200	30	54	40	3
AB001300206	200	30	54	60	3
AB001300208	200	30	54	80	3
AB001300212	200	30	54	120	3
AB001300218	200	30	54	180	3
AB001300304	200	50	54	40	2
AB001300306	200	50	54	60	2
AB001300308	200	50	54	80	2
AB001300312	200	50	54	120	2
AB001300318	200	50	54	180	2
AB001300322	200	50	54	220	2
AB001300404	250	30	100	40	3
AB001300406	250	30	100	60	3
AB001300408	250	30	100	80	3
AB001300412	250	30	100	120	3
AB001300504	250	50	100	40	2
AB001300506	250	50	100	60	2
AB001300508	250	50	100	80	2
AB001300512	250	50	100	120	2
AB001300518	250	50	100	180	2
AB001300522	250	50	100	220	2
AB001300604	300	50	100	40	2
AB001300606	300	50	100	60	2
AB001300608	300	50	100	80	2

**SLOTTED SHEETS
ALUMINIUM OXIDE CLOTH**




APPLICATION


For gentle smoothing, finishing and cleaning operations on metal and stainless steel surfaces.

Also suitable for smoothing operations on wood surfaces and cleaning operations on plastic surfaces.


RECOMMENDED USE



Bench grinder



Straight grinder

Article No.	Diameter	Height	Bore	Grit	
AB001310006	165	30	54	60	3
AB001310008	165	30	54	80	3
AB001310106	165	50	54	60	2
AB001310108	165	50	54	80	2
AB001310206	200	30	54	60	3
AB001310208	200	30	54	80	3
AB001310306	200	50	54	60	2
AB001310308	200	50	54	80	2
AB001310406	250	30	100	60	3
AB001310408	250	30	100	80	3
AB001310506	250	50	100	60	2
AB001310508	250	50	100	80	2
AB001310606	300	50	100	60	2
AB001310608	300	50	100	80	2

Particularly suitable for irregular or shaped surfaces.
They guarantee uniform machining even in case of multiple assemblies.





Wheels with M14 Threaded Bore

ALUMINIUM OXIDE CLOTH THREADED BORE M14




APPLICATION

For smoothing, finishing and cleaning operations on metal and stainless steel surfaces.


The reduced thickness of the wheels allows to reach all work surfaces.

The M14 threaded bore allows the use of the part on angle grinders.

RECOMMENDED USE



Angle grinder

Article No.	Diameter	Height	Bore	Grit	
AB001331204	125	20	M-14	40	10
AB001331206	125	20	M-14	60	10
AB001331208	125	20	M-14	80	10
AB001331212	125	20	M-14	120	10
AB001331224	125	20	M-14	240	10




ALUMINIUM OXIDE CLOTH



APPLICATION

For operations on ferrous and non-ferrous metals.
 Coarse grits are suitable for heavier satin finish operations.
 Fine grits are suitable for more gentle finishing operations.

RECOMMENDED USE



Angle satin finishing machine

Article No.	Diameter	Height	Bore	Grit	
AB001351104	100	100	19	40	4
AB001351106	100	100	19	60	4
AB001351108	100	100	19	80	4
AB001351112	100	100	19	120	4
AB001351124	100	100	19	240	4


ZIRCONIA CLOTH



APPLICATION

For operations on ferrous and non-ferrous metals.
 Coarse grits are suitable for heavier satin finish operations.
 Fine grits are suitable for more gentle finishing operations.

RECOMMENDED USE



Angle satin finishing machine

Article No.	Diameter	Height	Bore	Grit	
AB001361104	100	100	19	40	4
AB001361106	100	100	19	60	4


Particularly suitable for heavier heavy-duty operations on stainless steels, steels, ferrous and non-ferrous metals.

abrabeta.it





NON- WOVEN FABRIC

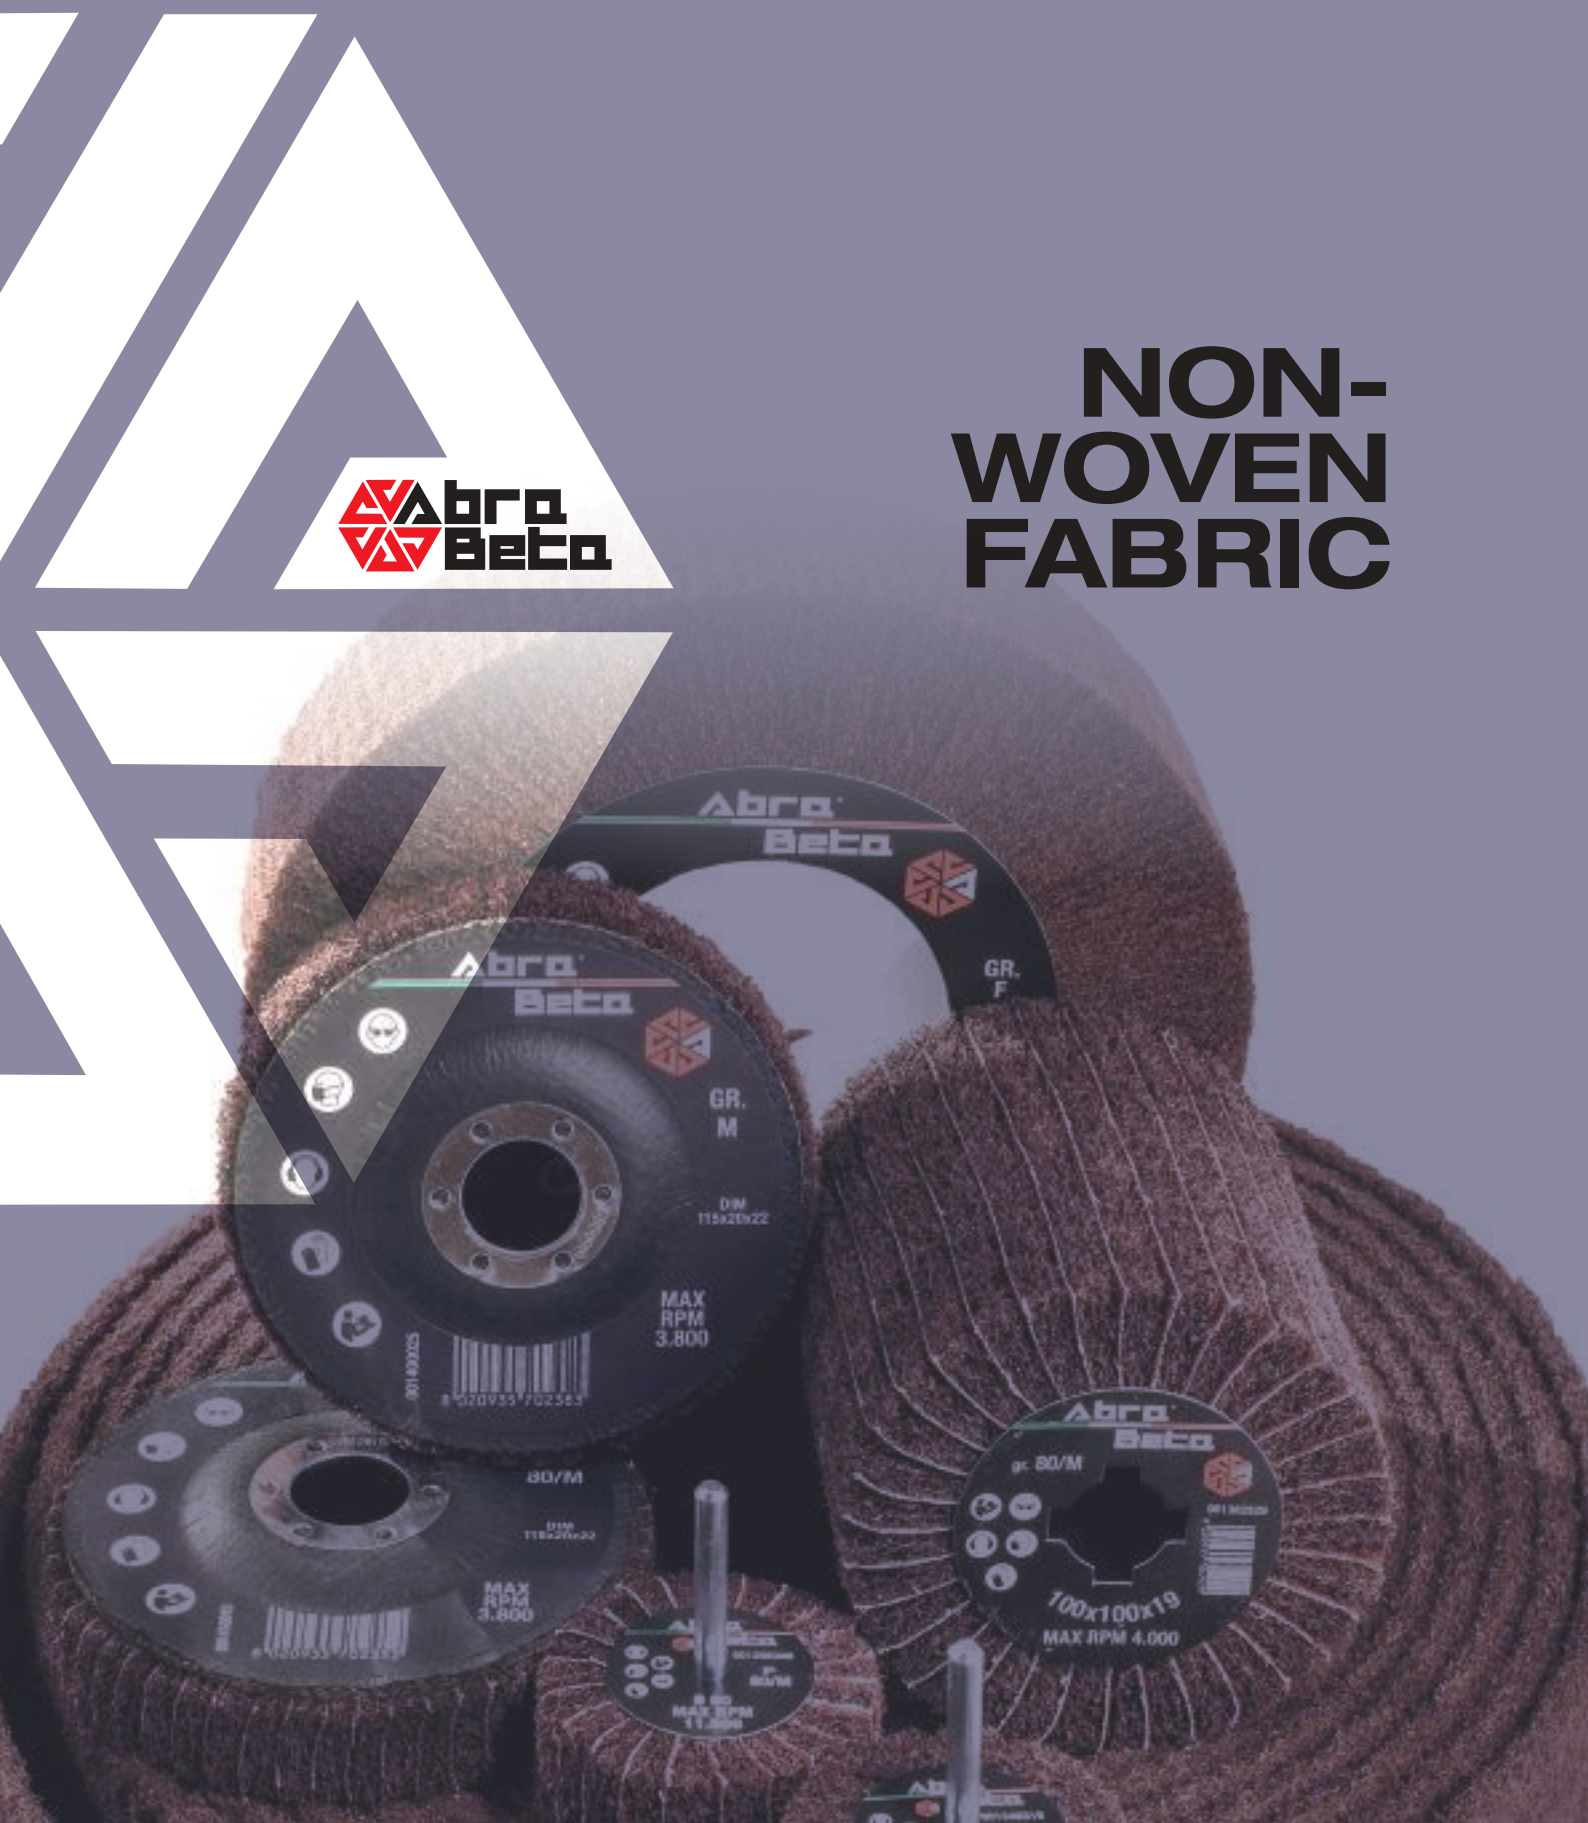

Abra Beta
GR. M
DIM 115x20x22
MAX RPM 3.800

80/M
DIM 115x20x22
MAX RPM 3.800

Abra Beta
gc. 80/M
100x100x19
MAX RPM 4.000

80
MAX RPM 11.000

Abra Beta
MAX RPM 11.000



Mounted Wheels

NON-WOVEN FABRIC SHEETS




APPLICATION


For grinding, satin finish and cleaning operations on common ferrous and non-ferrous steel alloys.

Particularly suitable for machining operations on materials with irregular and uneven surfaces, or in any case difficult to reach.


RECOMMENDED USE



Drill



Straight grinder

Article No.	Diameter	Height	Shaft	Grit	
AB001243206	30	20	6	COARSE	25
AB001243216	30	20	6	MEDIUM	25
AB001243226	30	20	6	FINE	25
AB001243236	30	20	6	VERY FINE	25
AB001243306	30	30	6	COARSE	25
AB001243316	30	30	6	MEDIUM	25
AB001243326	30	30	6	FINE	25
AB001243336	30	30	6	VERY FINE	25
AB001244206	40	20	6	COARSE	25
AB001244216	40	20	6	MEDIUM	25
AB001244226	40	20	6	FINE	25
AB001244236	40	20	6	VERY FINE	25
AB001244306	40	30	6	COARSE	25
AB001244316	40	30	6	MEDIUM	25
AB001244326	40	30	6	FINE	25
AB001244436	40	30	6	VERY FINE	25
AB001245306	50	30	6	COARSE	25
AB001245316	50	30	6	MEDIUM	25
AB001245326	50	30	6	FINE	25
AB001245336	50	30	6	VERY FINE	25
AB001246306	60	30	6	COARSE	25
AB001246316	60	30	6	MEDIUM	25
AB001246326	60	30	6	FINE	25
AB001246336	60	30	6	VERY FINE	25
AB001246506	60	50	6	COARSE	25
AB001246516	60	50	6	MEDIUM	25
AB001246526	60	50	6	FINE	25
AB001246536	60	50	6	VERY FINE	25
AB001248306	80	30	6	COARSE	25
AB001248316	80	30	6	MEDIUM	25
AB001248326	80	30	6	FINE	25
AB001248336	80	30	6	VERY FINE	25
AB001248506	80	50	6	COARSE	25
AB001248516	80	50	6	MEDIUM	25
AB001248526	80	50	6	FINE	25
AB001248536	80	50	6	VERY FINE	25

**INTERLEAVED SHEETS:
ALUMINIUM OXIDE AND
NON-WOVEN FABRIC CLOTH**




APPLICATION

For grinding, satin finish and cleaning operations on common ferrous and non-ferrous steel alloys.

Particularly suitable for machining operations on materials with irregular and uneven surfaces, or in any case difficult to reach.


RECOMMENDED USE



Drill



Straight grinder

Article No.	Diameter	Height	Shaft	Grit	
AB001253266	30	20	6	MEDIUM - 60	25
AB001253286	30	20	6	MEDIUM - 80	25
AB001253296	30	20	6	MEDIUM - 120	25
AB001253366	30	30	6	MEDIUM - 60	25
AB001253386	30	30	6	MEDIUM - 80	25
AB001253396	30	30	6	MEDIUM - 120	25
AB001254266	40	20	6	MEDIUM - 60	25
AB001254286	40	20	6	MEDIUM - 80	25
AB001254296	40	20	6	MEDIUM - 120	25
AB001254366	40	30	6	MEDIUM - 60	25
AB001254386	40	30	6	MEDIUM - 80	25
AB001254396	40	30	6	MEDIUM - 120	25
AB001255366	50	30	6	MEDIUM - 60	25
AB001255386	50	30	6	MEDIUM - 80	25
AB001255396	50	30	6	MEDIUM - 120	25
AB001256366	60	30	6	MEDIUM - 60	25
AB001256386	60	30	6	MEDIUM - 80	25
AB001256396	60	30	6	MEDIUM - 120	25
AB001256566	60	50	6	MEDIUM - 60	25
AB001256586	60	50	6	MEDIUM - 80	25
AB001256596	60	50	6	MEDIUM - 120	25
AB001258366	80	30	6	MEDIUM - 60	25
AB001258386	80	30	6	MEDIUM - 80	25
AB001258396	80	30	6	MEDIUM - 120	25
AB001258566	80	50	6	MEDIUM - 60	25
AB001258586	80	50	6	MEDIUM - 80	25
AB001258596	80	50	6	MEDIUM - 120	25

More aggressive version of the non-woven wheel, useful to remove more resistant surface defects from the work surface.





Threaded Bore Flap Wheels


NON-WOVEN FABRIC SHEETS



APPLICATION

Use for satin and opaque finish operations of metals.
Also suitable for operations on ceramic and wood surfaces.


RECOMMENDED USE



Bench grinder



Straight grinder

Article No.	Diameter	Height	Bore	Grit	
AB001320004	200	50	76,2	COARSE	2
AB001320006	200	50	76,2	MEDIUM	2
AB001320008	200	50	76,2	FINE	2
AB001320012	200	50	76,2	VERY FINE	2



NON-WOVEN FABRIC SHEETS




APPLICATION

For satin finish operations on surfaces consisting of aluminium, copper, brass, steel alloys and stainless steels.


Also suitable for the removal of oxide layers, machining of hard plastic and wood surfaces.

They ensure a high quality and uniform surface finish result.

RECOMMENDED USE



Angle satin finishing machine

Article No.	Diameter	Height	Bore	Grit	
AB001371519	100	50	19	COARSE	8
AB001371529	100	50	19	MEDIUM	8
AB001371539	100	50	19	FINE	8
AB001371549	100	50	19	VERY FINE	8
AB001372519	100	100	19	COARSE	4
AB001372529	100	100	19	MEDIUM	4
AB001372539	100	100	19	FINE	4
AB001372549	100	100	19	VERY FINE	4
AB001373519	110	50	19	COARSE	8
AB001373529	110	50	19	MEDIUM	8
AB001373539	110	50	19	FINE	8
AB001373549	110	50	19	VERY FINE	8
AB001374519	110	100	19	COARSE	4
AB001374529	110	100	19	MEDIUM	4
AB001374539	110	100	19	FINE	4
AB001374549	110	100	19	VERY FINE	4



INTERLEAVED SHEETS: ALLUMINIUM OXIDE AND NON-WOVEN FABRIC CLOTH




APPLICATION

For satin finish operations on surfaces consisting of aluminium, copper, brass and steel alloys.

Also suitable for the removal of oxide layers, machining of hard plastic and wood surfaces.

They ensure a high quality and uniform surface finish result.

RECOMMENDED USE



Angle satin finishing machine

Article No.	Diameter	Height	Bore	Grit	
AB001381519	100	50	19	COARSE - 60	8
AB001381529	100	50	19	MEDIUM - 80	8
AB001381539	100	50	19	FINE - 120	8
AB001381549	100	50	19	VERY FINE - 240	8
AB001382519	100	100	19	COARSE - 60	4
AB001382529	100	100	19	MEDIUM - 80	4
AB001382539	100	100	19	FINE - 120	4
AB001382549	100	100	19	VERY FINE - 240	4
AB001383519	110	50	19	COARSE - 60	8
AB001383529	110	50	19	MEDIUM - 80	8
AB001383539	110	50	19	FINE - 120	8
AB001383549	110	50	19	VERY FINE - 240	8
AB001384519	110	100	19	COARSE - 60	4
AB001384529	110	100	19	MEDIUM - 80	4
AB001384539	110	100	19	FINE - 120	4
AB001384549	110	100	19	VERY FINE - 240	4

More aggressive version of the non-woven wheel, especially suitable for particularly hard metals.
Also suitable for the removal of oxide layers.




RADIAL DISCS NON-WOVEN FABRIC SHEETS



APPLICATION

For cleaning or grinding operations on ferrous and non-ferrous steels.


RECOMMENDED USE



Angle grinder

Flat Profile



Article No.	Diameter	Height	Grit	
AB001400015	115	20	COARSE	4
AB001400025	115	20	MEDIUM	4
AB001400035	115	20	FINE	4
AB001400045	115	20	VERY FINE	4

RADIAL DISCS INTERLEAVED SHEETS ALUMINIUM OXIDE AND NON-WOVEN FABRIC CLOTH




APPLICATION

For cleaning or grinding operations of ferrous and non-ferrous steels.

The interleaved sheets bestow the disc higher aggressiveness during machining.


RECOMMENDED USE



Angle grinder

Flat Profile



Article No.	Diameter	Height	Grit	
AB001410015	115	20	MEDIUM - 80	4
AB001410025	115	20	MEDIUM - 120	4
AB001410035	115	20	FINE - 150	4
AB001410045	115	20	FINE - 180	4

NON-WOVEN FABRIC



APPLICATION

For hand operations for the removal of oxidation and paints.

Also suitable for cleaning operations on steel and metal surfaces, plastic or fiber glass and glass fiber surfaces.

The non-Woven Fabric texture ensures high resistance to clogging on any type of surface.

RECOMMENDED USE



Hand

Article No.	Height	Length	Grit	
AB001571100	100	10000	MEDIUM	1
AB001571110	100	10000	FINE	1
AB001571120	100	10000	VERY FINE	1
AB001571130	100	10000	ULTRA FINE	1
AB001571200	115	10000	MEDIUM	1
AB001571210	115	10000	FINE	1
AB001571220	115	10000	VERY FINE	1
AB001571230	115	10000	ULTRA FINE	1
AB001571300	120	10000	MEDIUM	1
AB001571310	120	10000	FINE	1
AB001571320	120	10000	VERY FINE	1
AB001571330	120	10000	ULTRA FINE	1

NON-WOVEN FABRIC ALUMINIUM OXIDE FIBERS



APPLICATION

For hand operations for the removal of oxidation and paints.


Also suitable for cleaning operations on steel and metal surfaces, plastic or fiber glass and glass fiber surfaces.

The non-Woven Fabric texture ensures high resistance to clogging on any type of surface.

RECOMMENDED USE



Hand

Article No.	Height	Width	Grit	
AB001580018	120	280	MEDIUM	20
AB001580028	120	280	FINE	20
AB001580038	120	280	VERY FINE	20
AB001580119	152	229	MEDIUM	20
AB001580129	152	229	FINE	20
AB001580139	152	229	VERY FINE	20

NON-WOVEN FABRIC SILICON CARBIDE FIBERS



APPLICATION

For hand operations for the removal of oxidation and paints.

Also suitable for cleaning operations on steel and metal surfaces, plastic or fiber glass and glass fiber surfaces.

The non-Woven Fabric texture ensures high resistance to clogging on any type of surface.

RECOMMENDED USE



Hand

Article No.	Height	Width	Grit	
AB001580218	120	280	ULTRA FINE	20
AB001580319	152	229	ULTRA FINE	20

abrabeta.it





POLISHING PRODUCTS





Felt Flap Discs and Wheels

FELT SHEETS




APPLICATION

For polishing operations on all types of steel, combined with abrasive polishing pastes.


Particularly suitable for operations on automotive bodywork.


RECOMMENDED USE



Angle grinder

GLASS FIBER BACKING PAD - Flat Profile



Article No.	Diameter	Type	
AB001170004	115	SINGLE-FLAP	20
AB001170104	125	SINGLE-FLAP	20

FELT SHEETS




APPLICATION

For polishing operations on all types of steel, combined with abrasive polishing pastes.

Particularly suitable for machining operations on automotive bodywork.


RECOMMENDED USE



Drill



Straight grinder

Article No.	Diameter	Height	Shaft	
AB001234306	40	30	6	25
AB001235306	50	30	6	25
AB001236306	60	30	6	25

Felt Mounted Points

FELT MOUNTED POINTS




APPLICATION


For extremely accurate polishing operations on all types of steel, combined with abrasive polishing pastes.

Particularly suitable for machining operations on automotive bodywork.


RECOMMENDED USE



Drill



Straight grinder

Article No.	Diameter	Height	Shaft	Shape	
AB001236100	6	10	3	Cylindrical	10
AB001236110	10	20	3	Cylindrical	10
AB001236120	10	14	6	Cylindrical	10
AB001236130	15	20	6	Cylindrical	10
AB001236140	20	25	6	Cylindrical	10
AB001236150	25	30	6	Cylindrical	10
AB001236160	30	30	6	Cylindrical	10




abrabetta.it





VELCRO DISCS

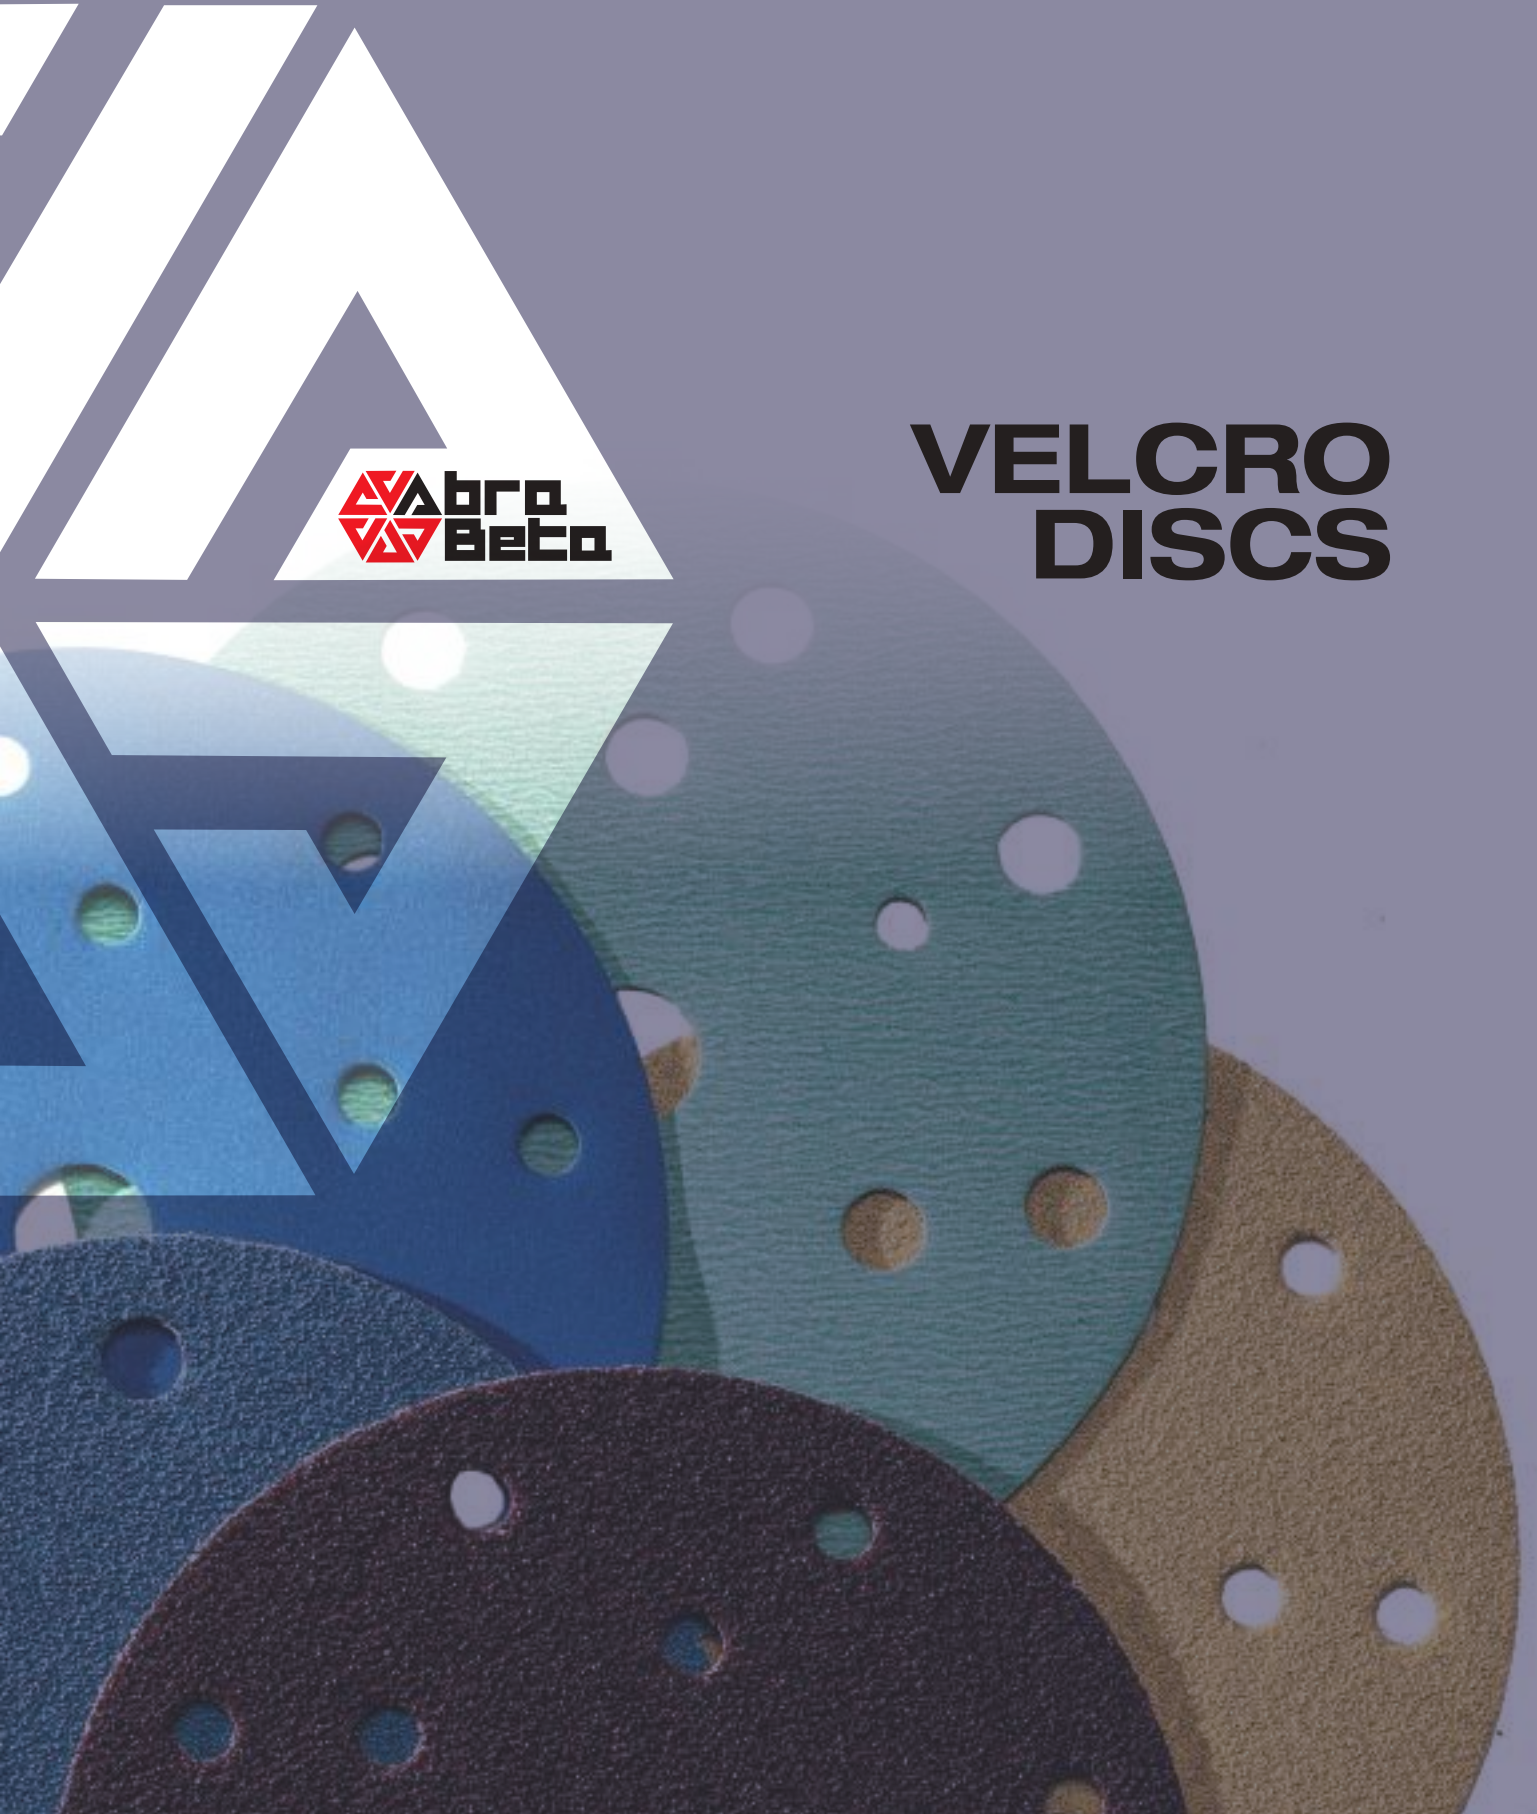



ALUMINIUM OXIDE PAPER




APPLICATION

For smoothing operations on wood and metal surfaces in general.

Coarse grits are suitable for aggressive smoothing operations, fine grits are particularly suitable for gentle smoothing operations.

RECOMMENDED USE



Random orbital sander

Article No.	Diameter	Bores	Grit	
AB001700104	115	-	40	50
AB001700106	115	-	60	50
AB001700108	115	-	80	50
AB001700110	115	-	100	100
AB001700112	115	-	120	100
AB001700118	115	-	180	100
AB001700122	115	-	220	100
AB001700204	125	8	40	50
AB001700206	125	8	60	50
AB001700208	125	8	80	50
AB001700210	125	8	100	100
AB001700212	125	8	120	100
AB001700218	125	8	180	100
AB001700222	125	8	220	100
AB001700304	150	-	40	50
AB001700306	150	-	60	50
AB001700308	150	-	80	50
AB001700310	150	-	100	100
AB001700312	150	-	120	100
AB001700318	150	-	180	100
AB001700322	150	-	220	100
AB001700404	150	6	40	50
AB001700406	150	6	60	50
AB001700408	150	6	80	50
AB001700410	150	6	100	100
AB001700412	150	6	120	100
AB001700418	150	6	180	100
AB001700422	150	6	220	100
AB001700504	150	8+1	40	50
AB001700506	150	8+1	60	50
AB001700508	150	8+1	80	50
AB001700510	150	8+1	100	100
AB001700512	150	8+1	120	100
AB001700518	150	8+1	180	100
AB001700522	150	8+1	220	100

ALUMINIUM OXIDE RESIN COATED PAPER




APPLICATION

For smoothing operations on wood surfaces, paint, resin and metal in general.


Coarse grits are suitable for aggressive smoothing operations, fine grits are particularly suitable for gentle smoothing operations.

The cloth resin coating prevents clogging of work surfaces.

RECOMMENDED USE



Random orbital sander

Article No.	Diameter	Bores	Grit	
AB001710208	125	-	80	50
AB001710210	125	-	100	100
AB001710212	125	-	120	100
AB001710218	125	-	180	100
AB001710222	125	-	220	100
AB001710228	125	-	280	100
AB001710232	125	-	320	100
AB001710240	125	-	400	100
AB001710308	125	8	80	50
AB001710310	125	8	100	100
AB001710312	125	8	120	100
AB001710318	125	8	180	100
AB001710322	125	8	220	100
AB001710328	125	8	280	100
AB001710332	125	8	320	100
AB001710340	125	8	400	100
AB001710408	150	-	80	50
AB001710410	150	-	100	100
AB001710412	150	-	120	100
AB001710418	150	-	180	100
AB001710422	150	-	220	100
AB001710428	150	-	280	100
AB001710432	150	-	320	100
AB001710440	150	-	400	100
AB001710508	150	6	80	50
AB001710510	150	6	100	100
AB001710512	150	6	120	100
AB001710518	150	6	180	100
AB001710522	150	6	220	100
AB001710528	150	6	280	100
AB001710532	150	6	320	100
AB001710540	150	6	400	100
AB001710608	150	8+1	80	50
AB001710610	150	8+1	100	100
AB001710612	150	8+1	120	100
AB001710618	150	8+1	180	100
AB001710622	150	8+1	220	100
AB001710628	150	8+1	280	100
AB001710632	150	8+1	320	100
AB001710640	150	8+1	400	100
AB001710708	150	8+6+1	80	50
AB001710710	150	8+6+1	100	100
AB001710712	150	8+6+1	120	100
AB001710718	150	8+6+1	180	100
AB001710722	150	8+6+1	220	100
AB001710728	150	8+6+1	280	100
AB001710732	150	8+6+1	320	100
AB001710740	150	8+6+1	400	100



SILICON CARBIDE PAPER




APPLICATION

For smoothing operations on wood surfaces, paint, resin, glass and natural stone.

Coarse grits are suitable for aggressive smoothing operations, fine grits are particularly suitable for gentle smoothing operations.

RECOMMENDED USE



Random orbital sander

Article No.	Diameter	Bores	Grit	
AB001720108	115	-	80	50
AB001720110	115	-	100	100
AB001720112	115	-	120	100
AB001720118	115	-	180	100
AB001720122	115	-	220	100
AB001720128	115	-	280	100
AB001720132	115	-	320	100
AB001720140	115	-	400	100
AB001720160	115	-	600	100
AB001720208	125	-	80	50
AB001720210	125	-	100	100
AB001720212	125	-	120	100
AB001720218	125	-	180	100
AB001720222	125	-	220	100
AB001720228	125	-	280	100
AB001720232	125	-	320	100
AB001720240	125	-	400	100
AB001720260	125	-	600	100
AB001720308	150	-	80	50
AB001720310	150	-	100	100
AB001720312	150	-	120	100
AB001720318	150	-	180	100
AB001720322	150	-	220	100
AB001720328	150	-	280	100
AB001720332	150	-	320	100
AB001720340	150	-	400	100
AB001720346	150	-	600	100
AB001720408	180	-	80	50
AB001720410	180	-	100	100
AB001720412	180	-	120	100
AB001720418	180	-	180	100
AB001720422	180	-	220	100
AB001720428	180	-	280	100
AB001720432	180	-	320	100
AB001720440	180	-	400	100
AB001720460	180	-	600	100

ZIRCONIA PAPER




APPLICATION

For smoothing operations on wood surfaces, paint, resin and stainless steel.

Coarse grits are suitable for aggressive smoothing operations, fine grits are particularly suitable for gentle smoothing operations.

RECOMMENDED USE



Random orbital sander

Article No.	Diameter	Bores	Grit	
AB001730108	150	8+6+1	80	50
AB001730110	150	8+6+1	100	100
AB001730112	150	8+6+1	120	100
AB001730118	150	8+6+1	180	100
AB001730122	150	8+6+1	220	100
AB001730128	150	8+6+1	280	100
AB001730132	150	8+6+1	320	100
AB001730140	150	8+6+1	400	100
AB001730150	150	8+6+1	500	100
AB001730160	150	8+6+1	600	100
AB001730180	150	8+6+1	800	100



Backing Pads for Velcro Discs


BACKING PADS FOR VELCRO DISCS




APPLICATION

For the application of velcro discs of respective types and sizes.

RECOMMENDED USE



Angle grinder

Article No.	Diameter	Bores	Fixing	
AB001760115	115	-	M14	1
AB001760125	125	-	M14	1
AB001760150	150	-	M14	1
AB001760180	180	-	M14	1


BACKING PADS FOR VELCRO DISCS




APPLICATION

For the application of velcro discs of respective types and sizes.

RECOMMENDED USE



Random orbital sander

Article No.	Diameter	Bores	Fixing	
AB001761125	125	8	-	1
AB001761150	150	-	-	1
AB001761156	150	6	-	1


BACKING PADS FOR VELCRO DISCS



APPLICATION

For the application of velcro discs of respective types and sizes.

RECOMMENDED USE



Random orbital sander

The backing pad is supplied with a fixing kit for the power tool.

Article No.	Diameter	Bores	Fixing	
AB001762150	150	8+1	5/16+M8	1
AB001762156	150	8+6+1	5/16+M8	1



FLEX DISCS



ZIRCONIA FIBER DISCS




APPLICATION

For operations on particularly demanding metal surfaces requiring a high performance.

Also suitable for stainless steel.


Coarse grits are suitable for grinding and rough grinding operations, fine grits are particularly suitable for finishing operations.


RECOMMENDED USE



Angle grinder

Flat Profile



Article No.	Diameter	Grit	
AB001431024	115	24	25
AB001431036	115	36	25
AB001431060	115	60	25
AB001431120	115	120	25
AB001432024	125	24	25
AB001432036	125	36	25
AB001432060	125	60	25
AB001432120	125	120	25
AB001433024	180	24	25
AB001433036	180	36	25
AB001433060	180	60	25
AB001433120	180	120	25



ALUMINIUM OXIDE FIBER DISCS




APPLICATION

For operations on particularly demanding metal surfaces requiring a high performance.
Also suitable for stainless steel.

Coarse grits are suitable for grinding and rough grinding operations, fine grits are particularly suitable for finishing operations.

RECOMMENDED USE



Angle grinder

Flat Profile



Article No.	Diameter	Grit	
AB001441024	115	24	25
AB001441036	115	36	25
AB001441060	115	60	25
AB001441120	115	120	25
AB001442024	125	24	25
AB001442036	125	36	25
AB001442060	125	60	25
AB001442120	125	120	25
AB001443024	180	24	25
AB001443036	180	36	25
AB001443060	180	60	25
AB001443120	180	120	25

For operations on less demanding surfaces in iron, steel and non-ferrous metals.
Also suitable for aluminium, cast iron and wood.

SILICON CARBIDE FIBER DISCS




APPLICATION

For use on marble, stone and granite surfaces.
Also suitable for glass.

The convex profile ensures greater capacity to reach uneven surfaces.

RECOMMENDED USE



Angle grinder

Convex Profile



Article No.	Diameter	Grit	
AB001453120	180	120	25
AB001453220	180	220	25
AB001453320	180	320	25



Backing Pads for Fiber Discs


BACKING PADS FOR FIBER DISCS



APPLICATION

For the application of fiber discs of respective types.
The backing pad is supplied with a lock nut for the power tool.

RECOMMENDED USE



Angle grinder

Article No.	Diameter	
AB001475115	115	1
AB001475125	125	1
AB001475180	180	1



Semi-Flex Discs

SILICON CARBIDE SEMI-FLEX DISCS




APPLICATION

For use on marble, stone and granite surfaces. Also suitable for glass.

The disc structure bestows high resistance and abrasive power. The convex profile ensures greater capacity to reach uneven surfaces.


Coarse grits are suitable for grinding and rough grinding operations, fine grits are particularly suitable for finishing operations.

RECOMMENDED USE



Angle grinder

CARDBOARD BACKING PAD - Flat Profile



Article No.	Diameter	Grit	
AB001471116	115	16	25
AB001471124	115	24	25
AB001471136	115	36	25
AB001471160	115	60	25
AB001471216	125	16	25
AB001471224	125	24	25
AB001471236	125	36	25
AB001471260	125	60	25
AB001471816	180	16	25
AB001471824	180	24	25
AB001471836	180	36	25
AB001471860	180	60	25

SILICON CARBIDE SEMI-FLEX DISCS




APPLICATION

For use on marble, stone and granite surfaces. Also suitable for glass.

The disc structure bestows high resistance and abrasive power. The convex profile ensures greater capacity to reach uneven surfaces.


Coarse grits are suitable for grinding and rough grinding operations, fine grits are particularly suitable for finishing operations.

RECOMMENDED USE



Angle grinder

GLASS FIBER BACKING PAD - Flat Profile




Article No.	Diameter	Grit	
AB001472124	125	24	25
AB001472136	125	36	25
AB001472224	180	24	25
AB001472236	180	36	25

abrabetta.it





STRIPPING PRODUCTS

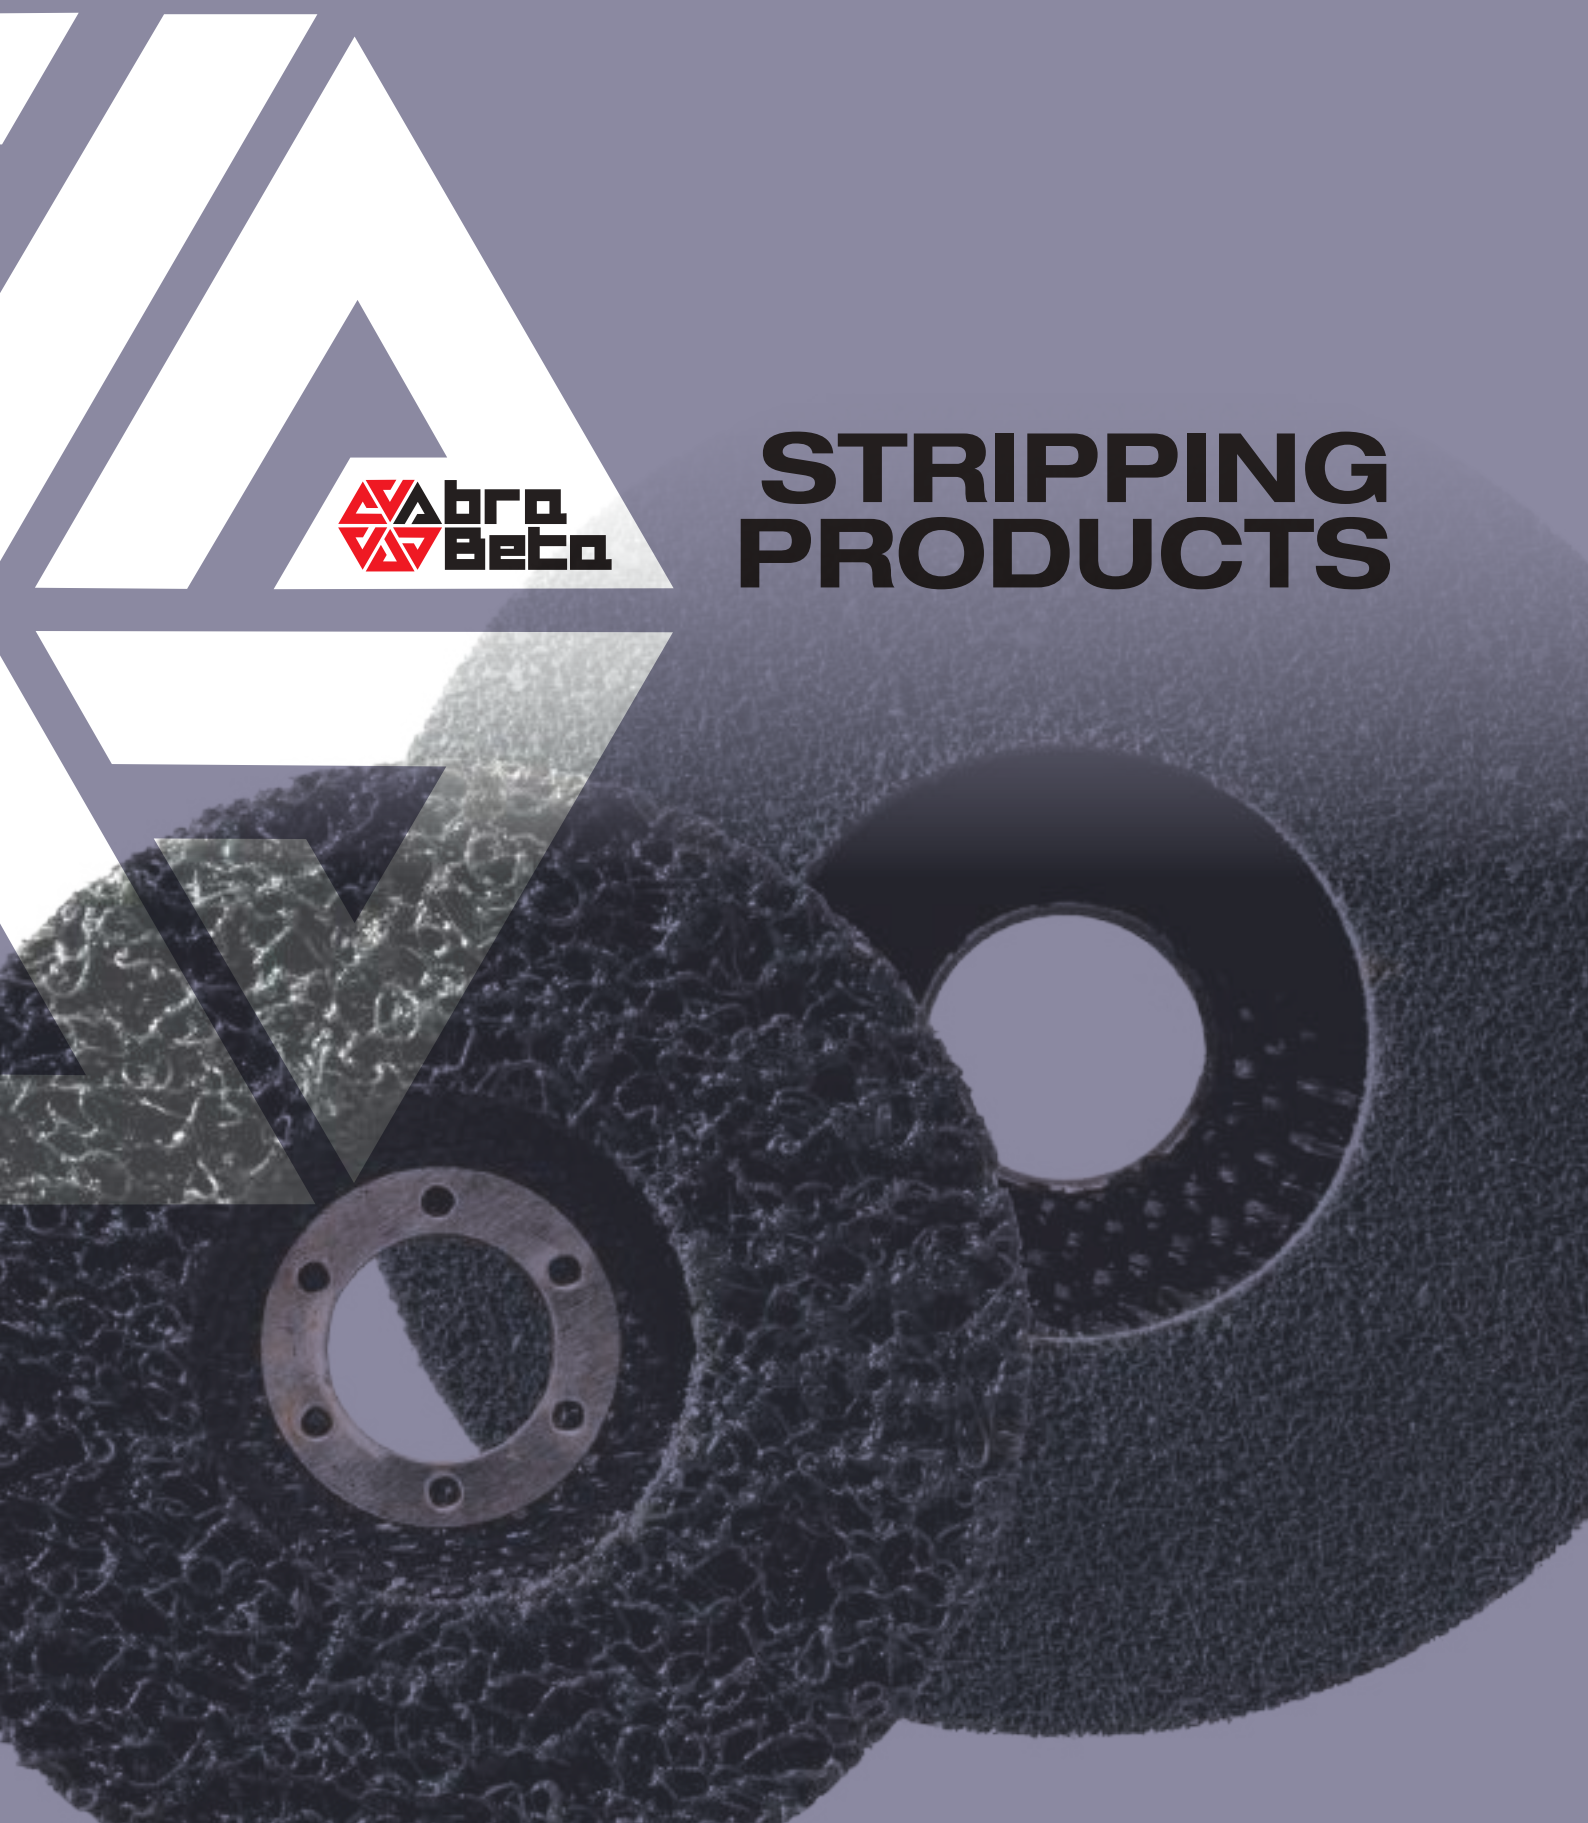



Mounted Stripping Wheels and Discs

STRIPPING WHEELS




APPLICATION


For gentle finishing and cleaning operations of the work surface.

The non-Woven Fabric texture prevents abrasive clogging during use.

RECOMMENDED USE



Drill



Straight grinder

MOUNTED STRIPPING WHEELS

Article No.	Diameter	Height	Shaft	
AB001271136	100	13	6	10
AB001271538	150	13	8	10

STRIPPING DISCS




APPLICATION

For finishing and cleaning operations of the work surface.


The texture of the disc prevents abrasive clogging during use.

RECOMMENDED USE



Straight grinder

MOUNTED STRIPPING DISCS

Article No.	Diameter	Bore	
AB001481413	100	13	10
AB001481420	SHAFT 6mm	M12	1
AB001481513	150	13	10
AB001481520	SHAFT 8mm	M12	1



Threaded Bore Unitized Discs


UNITIZED DISCS



APPLICATION

For deburring and finishing operations on steels, stainless steels, ferrous and non-ferrous metals, plastic and composite materials.

RECOMMENDED USE



Angle grinder

THREADED BORE UNITIZED DISCS

Article No.	Diameter	Grit	Bore	
AB001481122	115	2S FINE	22	10
AB001481132	115	2A MEDIUM	22	10
AB001481142	115	3S FINE	22	10
AB001481152	115	6A MEDIUM	22	10
AB001481222	127	2S FINE	22	10
AB001481232	127	2A MEDIUM	22	10
AB001481242	127	3S FINE	22	10
AB001481252	127	6A MEDIUM	22	10



Stripping Discs Threaded Bore

STRIPPING DISCS




APPLICATION

For finishing and cleaning operations of the work surface.


The texture of the disc prevents abrasive clogging during use.

RECOMMENDED USE



Angle grinder

STRIPPING DISCS THREADED BORE - FIBER GLASS BACKING PAD

Article No.	Diameter	Bore	
AB001481322	115	22	10
AB001481332	127	22	10
AB001481342	178	22	5

CERAMIC STRIPPING DISCS




APPLICATION

For high level finishing and cleaning operations of the work surface.


The texture of the disc prevents abrasive clogging during use.

RECOMMENDED USE



Angle grinder

CERAMIC STRIPPING DISCS THREADED BORE – FIBER GLASS BACKING PAD

Article No.	Diameter	Bore	
AB001490115	115	22	10
AB001490127	127	22	10
AB001490178	178	22	5



ABRASIVE SPIROBANDS





Abrasive Spirobands

ZIRCONIA CLOTH



APPLICATION


For accurate operations on ferrous and non-ferrous metals.
Also suitable for operations on stainless steels.

Coarse grits are suitable for smoothing operations of less regular surfaces.


Fine grits are suitable for more gentle finishing operations.

Its reduced dimension allows to reach any type of work surface.


RECOMMENDED USE



Drill



Straight grinder

Article No.	Diameter	Height	Grit	
AB001501204	10	20	40	100
AB001501206	10	20	60	100
AB001501208	10	20	80	100
AB001501212	10	20	120	100
AB001501304	15	30	40	100
AB001501306	15	30	60	100
AB001501308	15	30	80	100
AB001501312	15	30	120	100
AB001502204	25	25	40	100
AB001502206	25	25	60	100
AB001502208	25	25	80	100
AB001502212	25	25	120	100
AB001503304	30	30	40	100
AB001503306	30	30	60	100
AB001503308	30	30	80	100
AB001503312	30	30	120	100
AB001504304	45	30	40	100
AB001504306	45	30	60	100
AB001504308	45	30	80	100
AB001504312	45	30	120	100
AB001506304	60	30	40	100
AB001506306	60	30	60	100
AB001506308	60	30	80	100
AB001506312	60	30	120	100

Particularly suitable for accurate operations on stainless steels, ferrous and non-ferrous metals.

ALUMINIUM OXIDE CLOTH



APPLICATION


For accurate operations on ferrous and non-ferrous metals.

Coarse grits are suitable for smoothing operations on less regular surfaces.

Fine grits are suitable for more gentle finishing operations.

Its reduced dimension allows to reach any type of work surface.

RECOMMENDED USE




Drill



Straight grinder

Article No.	Diameter	Height	Grit	
AB001511304	15	30	40	100
AB001511306	15	30	60	100
AB001511312	15	30	120	100
AB001513304	30	30	40	100
AB001513306	30	30	60	100
AB001513312	30	30	120	100

SPIROBAND HOLDER




APPLICATION

To suit spirobands of corresponding size.

The diameter of spiroband holder shaft is 6 mm for all sizes.

RECOMMENDED USE



Drill



Straight grinder

Article No.	Diameter	Height	Material	
AB001541020	10	20	RUBBER	10
AB001541530	15	30	RUBBER	10
AB001542525	25	25	RUBBER	10
AB001543030	30	30	RUBBER	10
AB001544530	45	30	RUBBER	10
AB001546030	60	30	RUBBER	10

abrabetta.it





WASTE-FREE ROLLS



ALUMINIUM OXIDE CLOTH



APPLICATION

For universal use on ferrous and non-ferrous metals and different types of steel. Also suitable for operations on wood, stucco, plaster, paints, etc.

Coarse grits are suitable for smoothing operations on less regular surfaces.


Fine grits are suitable for more gentle finishing operations.

The cloth backing pad ensures a very high abrasive resistance strength during use.

RECOMMENDED USE



Hand

Article No.	Height	Length	Grit	
AB001553004	38	50000	40	1
AB001553006	38	50000	60	1
AB001553008	38	50000	80	1
AB001553010	38	50000	100	1
AB001553012	38	50000	120	1
AB001553015	38	50000	150	1
AB001553018	38	50000	180	1
AB001553022	38	50000	220	1
AB001553024	38	50000	240	1
AB001553028	38	50000	280	1
AB001553032	38	50000	320	1
AB001553040	38	50000	400	1
AB001555004	50	50000	40	1
AB001555006	50	50000	60	1
AB001555008	50	50000	80	1
AB001555010	50	50000	100	1
AB001555012	50	50000	120	1
AB001555015	50	50000	150	1
AB001555018	50	50000	180	1
AB001555022	50	50000	220	1
AB001555024	50	50000	240	1
AB001555028	50	50000	280	1
AB001555032	50	50000	320	1
AB001555040	50	50000	400	1
AB001555104	120	50000	40	1
AB001555106	120	50000	60	1
AB001555108	120	50000	80	1
AB001555110	120	50000	100	1
AB001555112	120	50000	120	1
AB001555115	120	50000	150	1
AB001555118	120	50000	180	1
AB001555124	120	50000	240	1
AB001555132	120	50000	320	1
AB001555140	120	50000	400	1

ALUMINIUM OXIDE PAPER



APPLICATION

Universal use for hand dry sanding operations on wood surfaces, paints and plasters.


Coarse grits are suitable for smoothing operations on less regular surfaces.
Fine grits are suitable for more gentle finishing operations.

The paper backing pad ensures higher flexibility of the abrasive during use.

RECOMMENDED USE



Hand

Article No.	Height	Length	Grit	
AB001565104	120	5000	40	9
AB001565106	120	5000	60	9
AB001565108	120	5000	80	9
AB001565110	120	5000	100	9
AB001565112	120	5000	120	9
AB001565118	120	5000	180	9
AB001565124	120	5000	240	9
AB001565132	120	5000	320	9



abrabeta.it





ABRASIVE BELTS



ZIRCONIA CLOTH




APPLICATION

For dry operations on stainless steel surfaces, steels, ferrous and non-ferrous metals by using stationary or hand-held machines.


Coarse grits are suitable for smoothing operations on less regular surfaces.

Fine grits are suitable for more gentle finishing operations.

RECOMMENDED USE



Bench smoothing machine

Article No.	Height	Length	Grit	
AB001601214	120	1500	40	10
AB001601216	120	1500	60	10
AB001601218	120	1500	80	10
AB001601236	120	1500	120	10
AB001605024	50	2000	40	10
AB001605026	50	2000	60	10
AB001605028	50	2000	80	10
AB001605036	50	2000	120	10



ABRASIVE SHEETS



Abrasive Sheets

ALUMINIUM OXIDE CLOTH



APPLICATION

Universal use for hand operations on metals and woods.

Coarse grits are suitable for smoothing operations on less regular surfaces.


Fine grits are suitable for more gentle finishing operations.

The cloth backing pad ensures a very high abrasive resistance strength during use.

RECOMMENDED USE



Hand

Article No.	Width	Length	Grit	
AB001642324	230	280	40	50
AB001642326	230	280	60	50
AB001642328	230	280	80	50
AB001642332	230	280	120	50
AB001642336	230	280	180	50
AB001642348	230	280	240	50
AB001642352	230	280	320	50
AB001642356	230	280	400	50





MOUNTED POINTS FOR STEEL





Mounted Points for Steel

APPLICATION

Universal use for machining all types of steel.

FEATURES

- Pink aluminium oxide
- Vitrified binder

RECOMMENDED USE



Straight grinder





Figure 1

MOUNTED POINTS FOR STEEL - Cylindrical

Article No.	Diameter (D)	Thickness (T)	Shaft (S _d xL ₂)	Specification	Figure	Max RPM (Lo=13 mm)	
AB000900003	3	6	3x37	AR80P5V	1	130.000	50
AB000900006	3	10	3x37	AR80P5V	1	130.000	50
AB000900009	4	8	3x37	AR60P5V	1	130.000	50
AB000900012	5	10	3x37	AR60P5V	1	105.700	50
AB000900015	6	10	3x37	AR60P5V	1	93.100	50
AB000900018	6	13	3x37	AR60P5V	1	77.800	50
AB000900021	6	20	3x37	AR60P5V	1	55.100	50
AB000900024	8	12	3x37	AR60P5V	1	64.500	50
AB000900027	8	16	3x37	AR60P5V	1	51.700	50
AB000900030	10	4	3x37	AR60P5V	1	95.400	50
AB000900033	10	10	3x37	AR60P5V	1	60.100	50
AB000900036	10	12	3x37	AR60P5V	1	52.700	50
AB000900039	10	20	3x37	AR60P5V	1	34.700	50
AB000900042	12	15	3x37	AR60P5V	1	37.300	50
AB000900045	3	6	6x40	AR80P5V	1	130.000	25
AB000900048	4	8	6x40	AR60P5V	1	130.000	25
AB000900051	5	10	6x40	AR60P5V	1	130.000	25
AB000900054	6	10	6x40	AR60P5V	1	130.000	25
AB000900057	6	20	6x40	AR60P5V	1	117.700	25
AB000900060	8	10	6x40	AR60P5V	1	119.300	25
AB000900063	8	16	6x40	AR60P5V	1	116.600	25
AB000900066	10	10	6x40	AR60P5V	1	95.400	25
AB000900069	10	15	6x40	AR60P5V	1	95.400	25
AB000900072	10	20	6x40	AR60P5V	1	86.600	25
AB000900075	10	25	6x40	AR60P5V	1	72.700	25
AB000900078	10	32	6x40	AR60P5V	1	58.700	25
AB000900081	12	10	6x40	AR60P5V	1	79.500	25
AB000900084	12	15	6x40	AR60P5V	1	79.500	25
AB000900087	12	20	6x40	AR60P5V	1	79.500	25
AB000900090	12	30	6x40	AR60P5V	1	53.800	25
AB000900093	15	3	6x40	AR60P5V	1	63.600	25
AB000900096	15	15	6x40	AR60P5V	1	63.600	25
AB000900102	16	20	6x40	AR46P5V	1	59.600	25
AB000900108	16	25	6x40	AR46P5V	1	56.900	25
AB000900114	16	32	6x40	AR46P5V	1	45.100	25
AB000900120	16	40	6x40	AR46P5V	1	35.800	25
AB000900123	20	4	6x40	AR60P5V	1	47.700	25
AB000900126	20	15	6x40	AR46P5V	1	47.700	25
AB000900129	20	20	6x40	AR46P5V	1	47.700	25



Article No.	Diameter (D)	Thickness (T)	Shaft (S _a xL ₂)	Specification	Figure	Max RPM (Lo=13 mm)	
AB000900132	20	25	6x40	AR46P5V	1	46.100	25
AB000900135	20	30	6x40	AR46P5V	1	38.900	25
AB000900138	20	32	6x40	AR46P5V	1	36.500	25
AB000900141	20	40	6x40	AR46P5V	1	29.000	25
AB000900144	25	6	6x40	AR60P5V	1	38.100	25
AB000900147	25	10	6x40	AR60P5V	1	38.100	25
AB000900150	25	25	6x40	AR36/46P5V	1	37.200	25
AB000900153	25	40	6x40	AR36/46P5V	1	23.300	10
AB000900156	30	6	6x40	AR60P5V	1	31.800	25
AB000900159	30	10	6x40	AR60P5V	1	31.800	25
AB000900162	30	30	6x40	AR36/46P5V	1	26.200	25
AB000900165	30	40	6x40	AR36/46P5V	1	19.500	10
AB000900168	32	20	6x40	AR36P5V	1	29.800	25
AB000900171	32	32	6x40	AR36P5V	1	23.100	10
AB000900174	40	6	6x40	AR60P5V	1	23.800	25
AB000900177	40	10	6x40	AR36/46P5V	1	23.800	25
AB000900180	40	20	6x40	AR36P5V	1	23.800	10
AB000900183	40	25	6x40	AR36P5V	1	23.400	10
AB000900186	40	30	6x40	AR36P5V	1	19.700	10
AB000900189	40	40	6x40	AR36P5V	1	14.700	10
AB000900192	50	10	6x40	AR36P5V	1	19.000	10
AB000900195	50	15	6x40	AR36P5V	1	19.000	10
AB000900198	50	25	6x40	AR36P5V	1	18.800	10
AB000900201	60	10	6x40	AR36P5V	1	15.900	10

Figure 2

MOUNTED POINTS FOR STEEL - Cylindrical – Truncated Cone






Article No.	Diameter (D)	Thickness (T)	Shaft (S _a xL ₂)	Specification	Figure	Max RPM (Lo=13 mm)	
AB000901003	20	65	6x40	AR36/46P5V	2	16.200	25

Figure 3

MOUNTED POINTS FOR STEEL - Truncated Cone




Article No.	Diameter (D)	Thickness (T)	Shaft (S _a xL ₂)	Specification	Figure	Max RPM (Lo=13 mm)	
AB000901006	6	10	3x37	AR60P5V	3	93.100	50
AB000901009	12	20	6x40	AR60P5V	3	79.500	25
AB000901012	15	25	6x40	AR46P5V	3	60.400	25
AB000901015	20	30	6x40	AR46P5V	3	38.900	25
AB000901018	25	40	6x40	AR36/46P5V	3	23.300	10



Mounted Points for Steel

Figure 5

MOUNTED POINTS FOR STEEL - Round Nose Cone





Article No.	Diameter (D)	Thickness (T)	Shaft (S _d x L ₂)	Specification	Figure	Max RPM (L ₀ =13 mm)	
AB000902003	6	10	3x37	AR60P5V	5	93.100	50
AB000902006	10	15	3x37	AR60P5V	5	44.300	50
AB000902009	10	20	6x40	AR60P5V	5	86.600	25
AB000902012	15	30	6x40	AR46P5V	5	51.000	25
AB000902015	16	45	6x40	AR46P5V	5	31.400	25
AB000902018	20	28	6x40	AR46P5V	5	41.500	25
AB000902021	20	40	6x40	AR46P5V	5	29.000	25
AB000902024	25	70	6x40	AR36/46P5V	5	11.800	10
AB000902027	30	50	6x40	AR36/46P5V	5	15.100	10
AB000902030	32	32	6x40	AR36P5V	5	23.100	10

Figure 6

MOUNTED POINTS FOR STEEL - Cylindrical – Pointed Tree





Article No.	Diameter (D)	Thickness (T)	Shaft (S _d x L ₂)	Specification	Figure	Max RPM (L ₀ =13 mm)	
AB000903003	8	16	3x37	AR60P5V	6	51.700	50
AB000903006	10	20	3x37	AR60P5V	6	34.700	50
AB000903009	8	16	6x40	AR60P5V	6	116.600	25
AB000903012	10	20	6x40	AR60P5V	6	86.600	25
AB000903015	13	20	6x40	AR60P5V	6	73.400	25
AB000903018	18	30	6x40	AR46P5V	6	43.000	25
AB000903021	20	50	6x40	AR36/46P5V	6	22.500	25
AB000903024	21	45	6x40	AR36/46P5V	6	24.200	25
AB000903027	22	70	6x40	AR36/46P5V	6	13.400	10
AB000903030	30	50	6x40	AR36/46P5V	6	15.100	10

Figure 7

MOUNTED POINTS FOR STEEL - Cylindrical – Straight Cone





Article No.	Diameter (D)	Thickness (T)	Shaft (S _d x L ₂)	Specification	Figure	Max RPM (L ₀ =13 mm)	
AB000904003	6	13	3x37	AR60P5V	7	77.800	50
AB000904006	6	25	6x40	AR60P5V	7	100.700	25
AB000904009	12	20	6x40	AR60P5V	7	79.500	25
AB000904012	20	25	6x40	AR46P5V	7	46.100	25
AB000904015	25	25	6x40	AR36/46P5V	7	37.200	25
AB000904018	30	30	6x40	AR36/46P5V	7	26.200	25

Figure 8


MOUNTED POINTS FOR STEEL - Cylindrical with Radius End



Article No.	Diameter (D)	Thickness (T)	Shaft (S _o xL ₂)	Specification	Figure	Max RPM (L _o =13 mm)	
AB000905003	6	20	6x40	AR60P5V	8	117.700	25
AB000905006	20	25	6x40	AR46P5V	8	46.100	25
AB000905009	25	25	6x40	AR36/46P5V	8	37.200	25
AB000905012	30	50	6x40	AR36/46P5V	8	15.100	10
AB000905015	40	40	6x40	AR36P5V	8	14.700	10

Figure 9


MOUNTED POINTS FOR STEEL - Ball



Article No.	Diameter (D)	Thickness (T)	Shaft (S _o xL ₂)	Specification	Figure	Max RPM (L _o =13 mm)	
AB000906003	6	6	3x37	AR60P5V	9	124.900	50
AB000906006	8	8	3x37	AR60P5V	9	84.800	50
AB000906009	10	10	3x37	AR60P5V	9	60.100	50
AB000906012	8	8	6x40	AR60P5V	9	119.300	25
AB000906015	10	10	6x40	AR60P5V	9	95.400	25
AB000906018	15	15	6x40	AR60P5V	9	63.600	25
AB000906021	20	20	6x40	AR46P5V	9	47.700	25
AB000906024	25	25	6x40	AR36/46P5V	9	37.200	25
AB000906027	30	30	6x40	AR36/46P5V	9	26.200	25

Figure 11

MOUNTED POINTS FOR STEEL - Knife Shape




Article No.	Diameter (D)	Thickness (T)	Shaft (S _o xL ₂)	Specification	Figure	Max RPM (L _o =13 mm)	
AB000907003	30	6	6x40	AR60P5V	11	31.800	25
AB000907006	30	8	6x40	AR60P5V	11	31.800	25
AB000907009	40	10	6x40	AR36/46P5V	11	23.800	25



Mounted Points for Steel

Figure 1

MOUNTED POINTS FOR STEEL - Cylindrical (long shaft)






Article No.	Diameter (D)	Thickness (T)	Shaft (S _d x L ₂)	Specification	Figure	Max RPM (L ₀ =52 mm)	
AB000908003	8	20	6x80	AR60P5V	1	34.400	25
AB000908006	10	15	6x80	AR60P5V	1	35.500	25
AB000908009	10	30	6x80	AR60P5V	1	24.600	25
AB000908012	12	15	6x80	AR60P5V	1	32.400	25
AB000908015	15	15	6x80	AR60P5V	1	28.000	25
AB000908018	15	30	6x80	AR46P5V	1	18.400	25
AB000908021	20	30	6x80	AR46P5V	1	14.400	25

Figure 9

MOUNTED POINTS FOR STEEL - Ball (long shaft)



Article No.	Diameter (D)	Thickness (T)	Shaft (S _d x L ₂)	Specification	Figure	Max RPM (L ₀ =52 mm)	
AB000908024	10	10	6x80	AR60P5V	9	41.200	25
AB000908027	15	15	6x80	AR60P5V	9	28.000	25
AB000908030	20	20	6x80	AR46P5V	9	19.000	25

The ground side surface guarantees the perfect concentricity of the shaft and an immediately ready-to-use mounted point, eliminating the need of dressing on the first use.





MOUNTED POINTS FOR STAINLESS STEEL





Mounted Points for Stainless Steel

APPLICATION

Universal use for heavy-duty machining operations of all types of stainless steels.

FEATURES

- Mixture of normal and white aluminium oxide
- Resin binder

RECOMMENDED USE



Straight grinder





Figure 1

MOUNTED POINTS FOR STAINLESS STEEL - Cylindrical





Article No.	Diameter (D)	Thickness (T)	Shaft (S _d x L ₂)	Specification	Figure	Max RPM (Lo=13 mm)	
AB000920003	10	20	6x40	A/AB30Q5B	1	86.600	25
AB000920006	15	30	6x40	A/AB30Q5B	1	51.000	25
AB000920009	20	20	6x40	A/AB30Q5B	1	47.700	25
AB000920012	20	25	6x40	A/AB30Q5B	1	46.100	25
AB000920015	20	30	6x40	A/AB30Q5B	1	38.900	25
AB000920018	20	40	6x40	A/AB30Q5B	1	29.000	25
AB000920021	25	25	6x40	A/AB30Q5B	1	37.200	25
AB000920024	30	10	6x40	A/AB30Q5B	1	31.800	25
AB000920027	30	30	6x40	A/AB30Q5B	1	26.200	25
AB000920030	35	35	6x40	A/AB30Q5B	1	19.300	10
AB000920033	40	10	6x40	A/AB30Q5B	1	23.800	25
AB000920036	40	20	6x40	A/AB30Q5B	1	23.800	10
AB000920039	50	10	6x40	A/AB30Q5B	1	19.000	10
AB000920042	20	40	8x40	A/AB30Q5B	1	46.800	25
AB000920045	30	40	8x40	A/AB30Q5B	1	31.800	10
AB000920048	35	35	8x40	A/AB30Q5B	1	27.200	10
AB000920051	40	40	8x40	A/AB30Q5B	1	23.800	10

Figure 5

MOUNTED POINTS FOR STAINLESS STEEL - Round Nose Cone






Article No.	Diameter (D)	Thickness (T)	Shaft (S _d x L ₂)	Specification	Figure	Max RPM (Lo=13 mm)	
AB000920054	20	40	6x40	A/AB30Q5B	5	29.000	25

Figure 6

MOUNTED POINTS FOR STAINLESS STEEL - Cylindrical - Pointed Tree



Article No.	Diameter (D)	Thickness (T)	Shaft (S _d x L ₂)	Specification	Figure	Max RPM (Lo=13 mm)	
AB000920057	20	30	6x40	A/AB30Q5B	6	38.900	25
AB000920060	25	50	6x40	A/AB30Q5B	6	18.100	10



MOUNTED POINTS FOR CAST IRON





Mounted Points for Cast Iron

APPLICATION

Universal use for deburring cast iron parts.

CARATTERISTICHE

- Mixture of normal and pink aluminium oxide
- Vitrified binder

RECOMMENDED USE



Straight grinder




Figure 1

MOUNTED POINTS FOR CAST IRON - Cylindrical

Article No.	Diameter (D)	Thickness (T)	Shaft (S ₁ xL ₂)	Specification	Figure	Max RPM (Lo=13 mm)	
AB000940003	16	32	6x40	A/AR24R5V	1	45.100	25
AB000940006	20	30	6x40	A/AR24R5V	1	38.900	25
AB000940009	20	40	6x40	A/AR24R5V	1	29.000	25
AB000940012	25	25	6x40	A/AR24R5V	1	37.200	25
AB000940015	30	30	6x40	A/AR24R5V	1	26.200	25
AB000940018	30	40	6x40	A/AR24R5V	1	19.500	10
AB000940021	40	10	6x40	A/AR24R5V	1	23.800	25
AB000940024	40	20	6x40	A/AR24R5V	1	23.800	10
AB000940027	50	10	6x40	A/AR24R5V	1	19.000	10
AB000940030	20	40	8x40	A/AR24R5V	1	46.800	25
AB000940033	30	40	8x40	A/AR24R5V	1	31.800	10
AB000940036	40	40	8x40	A/AR24R5V	1	23.800	10




Figure 5

MOUNTED POINTS FOR CAST IRON - Round Nose Cone

Article No.	Diameter (D)	Thickness (T)	Shaft (S ₁ xL ₂)	Specification	Figure	Max RPM (Lo=13 mm)	
AB000940039	20	40	6x40	A/AR24R5V	5	29.000	25





Figure 6

MOUNTED POINTS FOR CAST IRON - Cylindrical - Pointed Tree

Article No.	Diameter (D)	Thickness (T)	Shaft (S ₁ xL ₂)	Specification	Figure	Max RPM (Lo=13 mm)	
AB000940042	20	30	6x40	A/AR24R5V	6	38.900	25
AB000940045	25	50	6x40	A/AR24R5V	6	18.100	10





SHOP

in *shop*



Abra Beta SHOP IN SHOP:







The new **“SHOP IN SHOP”** program includes dozens of assorted display modules containing several products from the Abra Beta catalogue.



dedicated to our partners


The accurate selection of items is designed to satisfy all professionals that always want the best solutions at hand for their work.

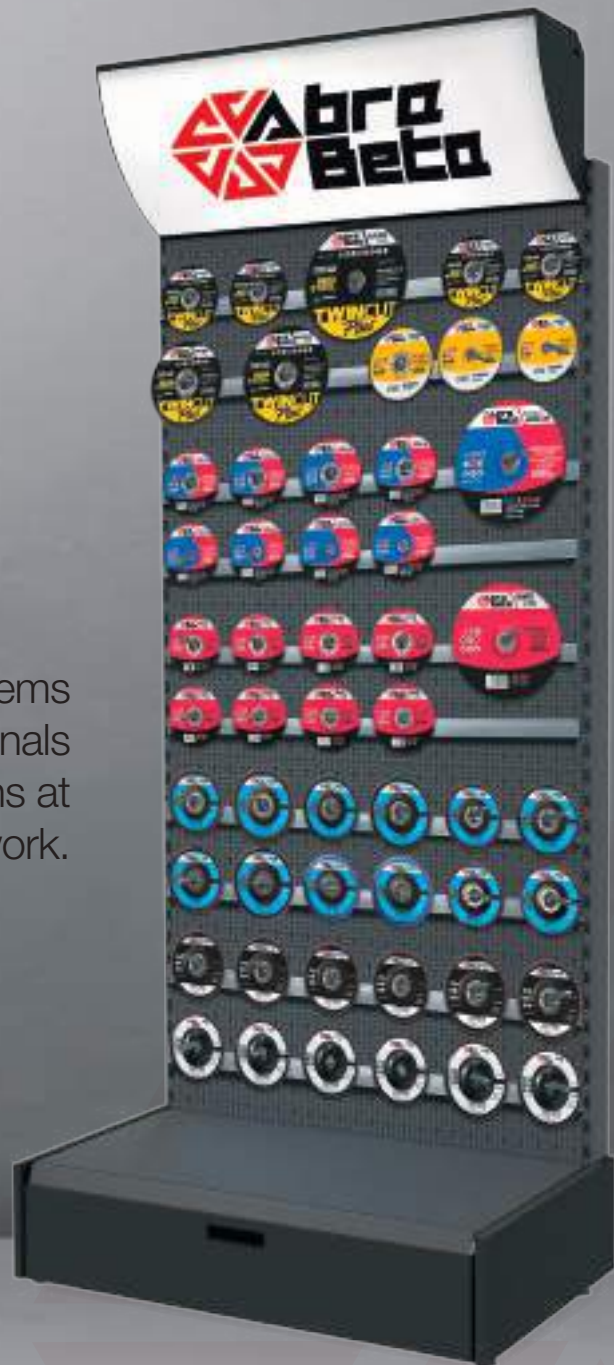






Selection Thinner Cutting Discs 115 mm



Module Code	Description	
AB008880101	AM/101	1.350


Article Code	Line	Specification	Diameter x thickness	Quantity
1 AB000330115	Platinum	Stainless Steel/Steel Twincut Plus A46U	115 x 1,0	100
2 AB000330116	Platinum	Stainless Steel/Steel Twincut Plus A46U	115 x 1,2	100
3 AB000330118	Platinum	Stainless Steel/Steel Twincut Plus A46U	115 x 1,6	100
4 AB000300115	Silver	Stainless Steel/Steel Twincut A46Q	115 x 1,0	150
5 AB000300116	Silver	Stainless Steel/Steel Twincut A46Q	115 x 1,2	150
6 AB000300118	Silver	Stainless Steel/Steel Twincut A46Q	115 x 1,6	150
7 AB000010115	Silver	Steel A36S	115 x 1,0	100
8 AB000010119	Silver	Steel A36S	115 x 1,6	100
9 AB000200115	Silver	Stainless Steel A36N	115 x 1,0	100
10 AB000200118	Silver	Stainless Steel A36N	115 x 1,6	100
11 AB000400115	Diamond	Aluminium A30N	115 x 1,6	100
12 AB000500115	Silver	Stone C36S	115 x 1,6	100






Selection Thinner Cutting Discs 125 mm




Module Code	Description	
AB008880102	AM/102	1.150

Article Code	Line	Specification	Diameter x thickness	Quantity	Quantità
1		Platinum	Stainless Steel/Steel Twincut Plus A46U	125 x 1,0	100
2		Platinum	Stainless Steel/Steel Twincut Plus A46U	125 x 1,2	100
3		Platinum	Stainless Steel/Steel Twincut Plus A46U	125 x 1,6	100
4		Silver	Stainless Steel/Steel Twincut A46Q	125 x 1,0	100
5		Silver	Stainless Steel/Steel Twincut A46Q	125 x 1,2	100
6		Silver	Stainless Steel/Steel Twincut A46Q	125 x 1,6	100
7		Silver	Steel A36S	125 x 1,0	100
8		Silver	Steel A36S	125 x 1,6	100
9		Silver	Stainless Steel A36N	125 x 1,0	100
10		Silver	Stainless Steel A36N	125 x 1,6	100
11		Diamond	Aluminium A30N	125 x 1,6	100
12		Platinum	Zirconia ZA46T	125 x 1,6	50






Selection Cutting & Grinding Discs for Steel

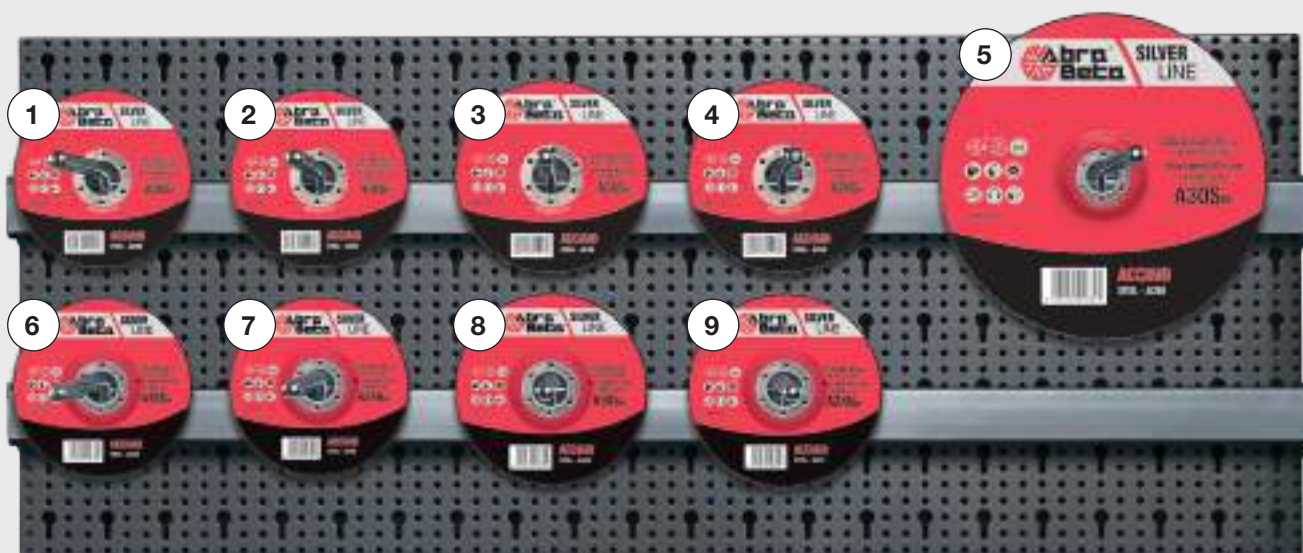

Module Code	Description	
AB008880103	AM/103	1.050


Article Code	Line	Specification	Diameter x thickness	Quantity
1 AB000010115	Silver	Steel A36S	115 x 1,0	200
2 AB000010119	Silver	Steel A36S	115 x 1,6	200
3 AB000010125	Silver	Steel A36S	125 x 1,0	150
4 AB000010129	Silver	Steel A36S	125 x 1,6	150
5 AB000050230	Silver	Steel A30S	230 x 3,2	50
6 AB000050115	Silver	Steel A30S	115 x 3,2	100
7 AB000070118	Silver	Steel A24N	115 x 6,5	50
8 AB000050125	Silver	Steel A30S	125 x 3,2	100
9 AB000070128	Silver	Steel A24N	125 x 6,5	50








Selection Cutting & Grinding Discs




Module Code	Description	
AB008880104	AM/104	925

Article Code	Line	Specification	Diameter x thickness	Quantity
1 AB000330115	Platinum	Stainless Steel/Steel Twincut Plus A46U	115 x 1,0	200
2 AB000330118	Platinum	Stainless Steel/Steel Twincut Plus A46U	115 x 1,6	200
3 AB000330230	Platinum	Stainless Steel/Steel Twincut Plus A46U	230 x 2,0	50
4 AB000330125	Platinum	Stainless Steel/Steel Twincut Plus A46U	125 x 1,0	100
5 AB000330128	Platinum	Stainless Steel/Steel Twincut Plus A46U	125 x 1,6	100
6 AB000330150	Platinum	Stainless Steel/Steel Twincut Plus A46U	150 x 1,6	50
7 AB000330180	Platinum	Stainless Steel/Steel Twincut Plus A46U	180 x 2,0	25
8 AB000400125	Diamond	Aluminium A30N	125 x 1,6	100
9 AB000460125	Diamond	Aluminium A30N	125 x 6,5	50
10 AB000460115	Diamond	Aluminium A30N	115 x 6,5	50






Selection Cutting & Grinding Discs



Module Code	Description	
AB008880105	AM/105	1.050


Article Code	Line	Specification	Diameter x thickness	Quantity
1 AB000300115	Silver	Stainless Steel/Steel Twincut A46Q	115 x 1,0	200
2 AB000300118	Silver	Stainless Steel/Steel Twincut A46Q	115 x 1,6	200
3 AB000300125	Silver	Stainless Steel/Steel Twincut A46Q	125 x 1,0	150
4 AB000300128	Silver	Stainless Steel/Steel Twincut A46Q	125 x 1,6	150
5 AB000370230	Silver	Stainless Steel/Steel Twincut A30Q	230 x 3,2	50
6 AB000370115	Silver	Stainless Steel/Steel Twincut A30Q	115 x 3,2	100
7 AB000380115	Silver	Stainless Steel/Steel Twincut A24Q	115 x 6,5	50
8 AB000370125	Silver	Stainless Steel/Steel Twincut A30Q	125 x 3,2	100
9 AB000380125	Silver	Stainless Steel/Steel Twincut A24Q	125 x 6,5	50








Selection Thinner Cutting Discs 230 mm







Module Code	Description	
AB008880106	AM/106	450




Article Code	Line	Specification	Diameter x thickness	Quantity
1 AB000010230 	Silver	Steel A30S	230 x 2,0	150
2 AB000300230 	Silver	Stainless Steel/Steel Twincut A36Q	230 x 2,0	150
3 AB000330230 	Platinum	Stainless Steel/Steel Twincut Plus A46U	230 x 2,0	150



Selection Cutting Discs 230 mm







Module Code		Description				
AB008880107		AM/107			400	
Article Code		Line	Specification	Diameter x thickness	Quantity	
1	AB000050230		Silver	Steel A30S	230 x 3,2	150
2	AB000370230		Silver	Stainless Steel/Steel Twincut A30Q	230 x 3,2	100
3	AB000340230		Platinum	Stainless Steel/Steel Twincut Plus A46U	230 x 2,0	150






Selection Grinding Discs 230 mm




Module Code	Description	
AB008880108	AM/108	225




Article Code	Line	Specification	Diameter x thickness	Quantity
1 AB000070236 	Silver	Steel A24N	230 x 6,5	100
2 AB000380230 	Silver	Stainless Steel/Steel Twincut A24Q	230 x 6,5	75
3 AB000120236 	Platinum	Zirconia ZA24R	230 x 7,0	50




Selection Cutting Discs and Flap Discs (Fiber backing pad)

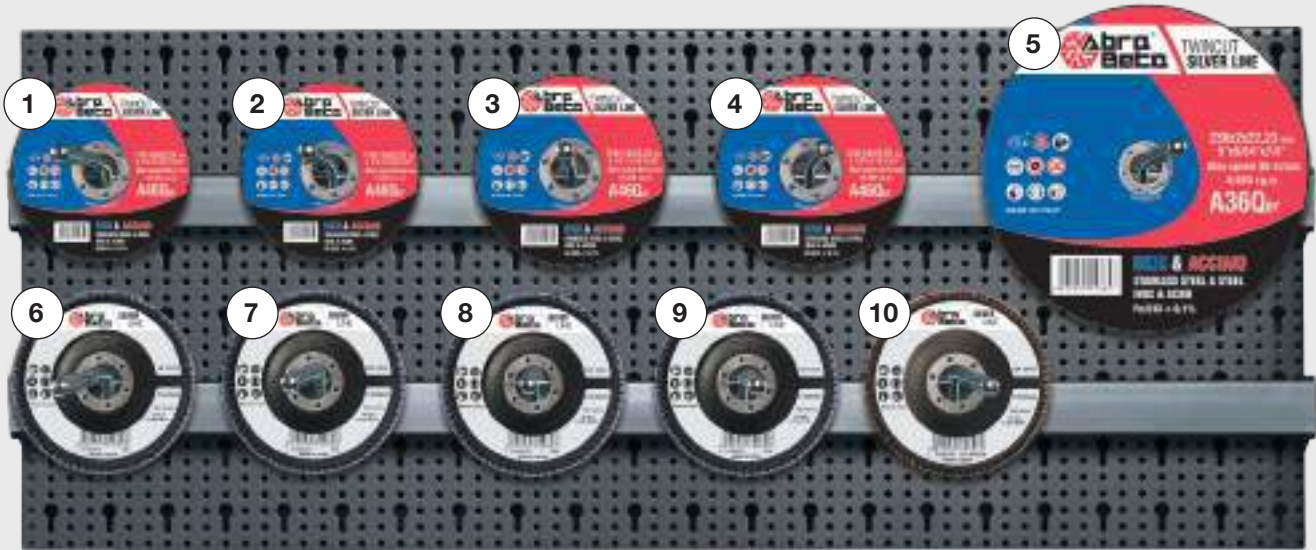


Module Code		Description			
AB008880109		AM/109		970	
Article Code	Line	Specification	Diameter x thickness	Quantity	
1	AB000300115	Silver	Stainless Steel/Steel Twincut A46Q	115 x 1,0	200
2	AB000300118		Silver	Stainless Steel/Steel Twincut A46Q	115 x 1,6
3	AB000300125		Silver	Stainless Steel/Steel Twincut A46Q	125 x 1,0
4	AB000300128		Silver	Stainless Steel/Steel Twincut A46Q	125 x 1,6
5	AB000300230		Silver	Stainless Steel/Steel Twincut A46Q	230 x 2,0
6	AB001010304		Silver	Fiber 1-1 GR40	115 Zirconia
7	AB001010306		Silver	Fiber 1-1 GR60	115 Zirconia
8	AB001010308		Silver	Fiber 1-1 GR80	115 Zirconia
9	AB001010312		Silver	Fibra 1-1 GR120	115 Zirconia
10	AB001010804		Silver	Fiber 1-1 GR40	115 Zirconia Bigger






Selection Cutting Discs and Flap Discs (Fiber backing pad)

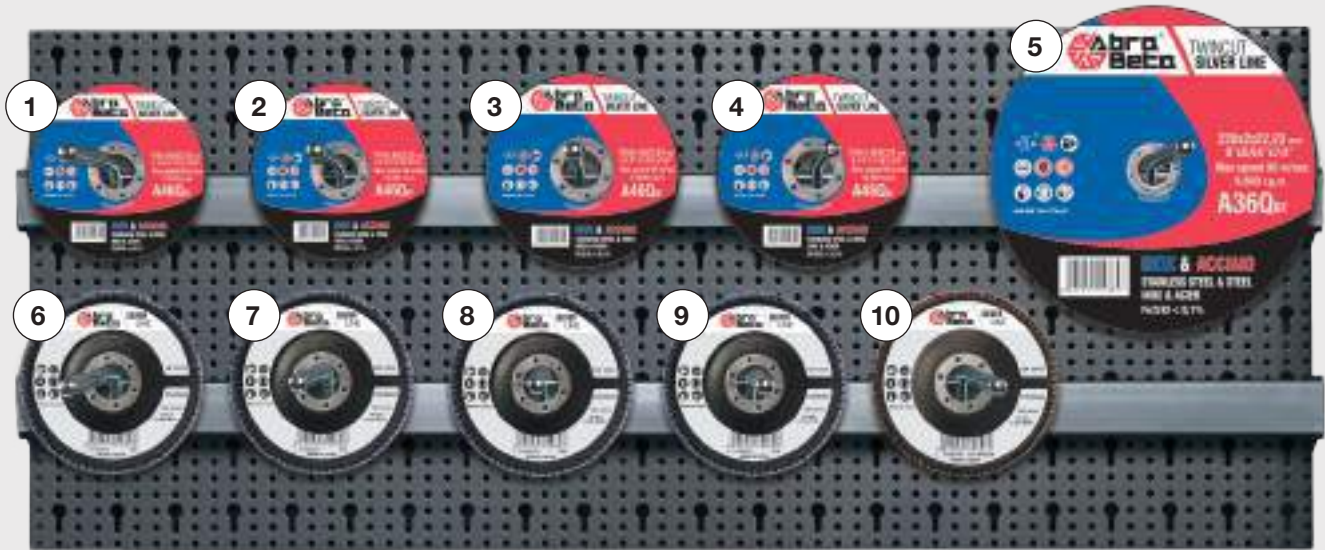


Module Code	Description	
AB008880110	AM/110	970




Article Code	Line	Specification	Diameter x thickness	Quantity
1 AB000300115	Silver	Stainless Steel/Steel Twincut A46Q	115 x 1,0	200
2 AB000300118	Silver	Stainless Steel/Steel Twincut A46Q	115 x 1,6	200
3 AB000300125	Silver	Stainless Steel/Steel Twincut A46Q	125 x 1,0	150
4 AB000300128	Silver	Stainless Steel/Steel Twincut A46Q	125 x 1,6	150
5 AB000300230	Silver	Stainless Steel/Steel Twincut A36Q	230 x 2,0	50
6 AB001010404	Silver	Fiber 1-1 GR40	125 Zirconia	60
7 AB001010406	Silver	Fiber 1-1 GR60	125 Zirconia	40
8 AB001010408	Silver	Fiber 1-1 GR80	125 Zirconia	40
9 AB001010412	Silver	Fiber 1-1 GR120	125 Zirconia	20
10 AB001010854	Silver	Fiber 1-1 GR40	125 Zirconia Bigger	60




Selection Cutting Discs and Flap Discs (Nylon backing pad)

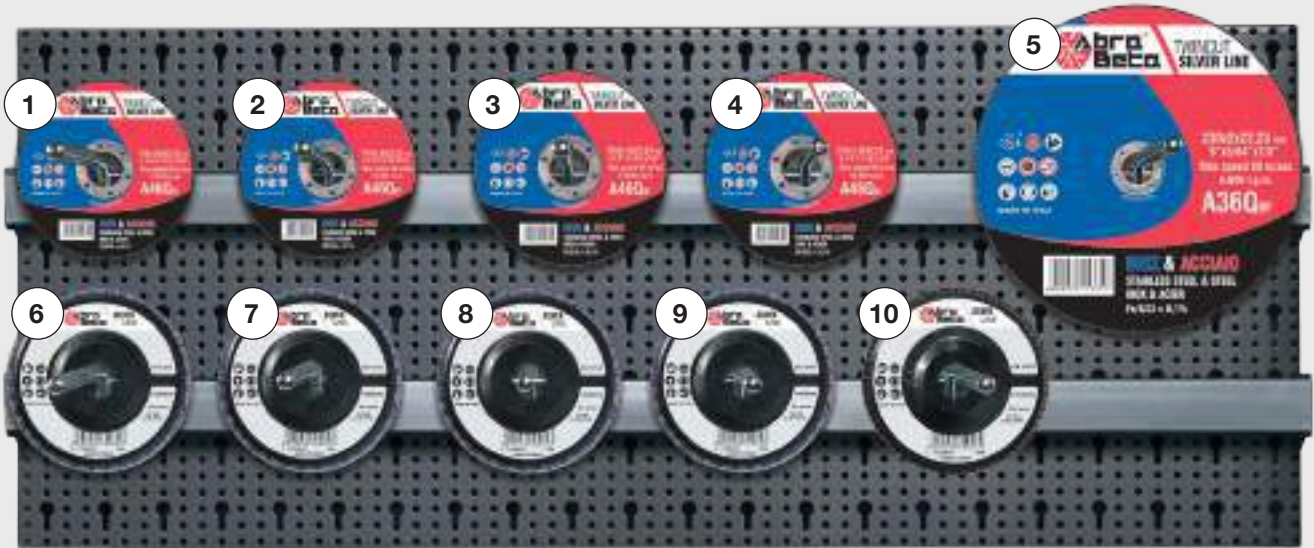

Module Code		Description			
AB008880111		AM/111		950	
Article Code	Line	Specification	Diameter x thickness	Quantity	
1 AB000300115	Silver	Stainless Steel/Steel Twincut A46Q	115 x 1,0	200	
2 AB000300118	Silver	Stainless Steel/Steel Twincut A46Q	115 x 1,6	200	
3 AB000300125	Silver	Stainless Steel/Steel Twincut A46Q	125 x 1,0	150	
4 AB000300128	Silver	Stainless Steel/Steel Twincut A46Q	125 x 1,6	150	
5 AB000300230	Silver	Stainless Steel/Steel Twincut A36Q	230 x 2,0	50	
6 AB001010024	Silver	Nylon 2-2 GR40	115 Zirconia	60	
7 AB001010026	Silver	Nylon 2-2 GR60	115 Zirconia	40	
8 AB001010028	Silver	Nylon 2-2 GR80	115 Zirconia	40	
9 AB001010032	Silver	Nylon 2-2 GR120	115 Zirconia	20	
10 AB001110024	Silver	Nylon 2-2 GR40	115 Aluminium Oxide	40	






Selection Cutting Discs and Flap Discs (Nylon backing pad)

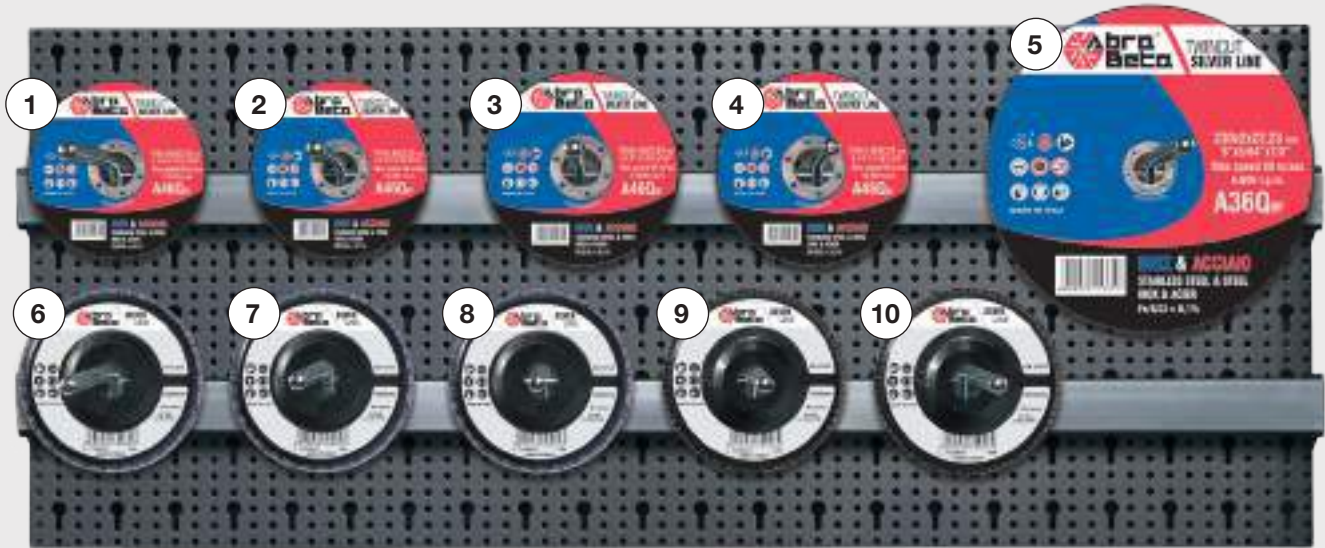

Module Code	Description	
AB008880112	AM/112	950




Article Code	Line	Specification	Diameter x thickness	Quantity
1 AB000300115	Silver	Stainless Steel/Steel Twincut A46Q	115 x 1,0	200
2 AB000300118	Silver	Stainless Steel/Steel Twincut A46Q	115 x 1,6	200
3 AB000300125	Silver	Stainless Steel/Steel Twincut A46Q	125 x 1,0	150
4 AB000300128	Silver	Stainless Steel/Steel Twincut A46Q	125 x 1,6	150
5 AB000300230	Silver	Stainless Steel/Steel Twincut A36Q	230 x 2,0	50
6 AB001010124	Silver	Nylon 2-2 GR40	125 Zirconia	60
7 AB001010126	Silver	Nylon 2-2 GR60	125 Zirconia	40
8 AB001010128	Silver	Nylon 2-2 GR80	125 Zirconia	40
9 AB001110124	Silver	Nylon 2-2 GR40	125 Aluminium Oxide	40
10 AB001110126	Silver	Nylon 2-2 GR60	125 Aluminium Oxide	20



Selection Cutting Discs and Flap Discs (Fiber backing pad)




Module Code	Description			
AB008880113	AM/113		970	
Article Code	Line	Specification	Diameter x thickness	Quantity
1 AB000330115	Platinum	Stainless Steel/Steel Twincut Plus A46U	115 x 1,0	200
2 AB000330118	Platinum	Stainless Steel/Steel Twincut Plus A46U	115 x 1,6	200
3 AB000330125	Platinum	Stainless Steel/Steel Twincut Plus A46U	125 x 1,0	150
4 AB000330128	Platinum	Stainless Steel/Steel Twincut Plus A46U	125 x 1,6	150
5 AB000330230	Platinum	Stainless Steel/Steel Twincut Plus A46U	230 x 2,0	50
6 AB001050304	Platinum	Fiber 1-1 GR40	115 Zirconia	60
7 AB001050306	Platinum	Fiber 1-1 GR60	115 Zirconia	40
8 AB001050308	Platinum	Fiber 1-1 GR80	115 Zirconia	40
9 AB001050312	Platinum	Fiber 1-1 GR120	115 Zirconia	20
10 AB001010804	Silver	Fiber 1-1 GR40	115 Zirconia Bigger	60






Selection Cutting Discs and Flap Discs (Fiber backing pad)




Module Code	Description	
AB008880114	AM/114	950

Article Code	Line	Specification	Diameter x thickness	Quantity
1 AB000330115	Platinum	Stainless Steel/Steel Twincut Plus A46U	115 x 1,0	200
2 AB000330118	Platinum	Stainless Steel/Steel Twincut Plus A46U	115 x 1,6	200
3 AB000330125	Platinum	Stainless Steel/Steel Twincut Plus A46U	125 x 1,0	150
4 AB000330128	Platinum	Stainless Steel/Steel Twincut Plus A46U	125 x 1,6	150
5 AB000330230	Platinum	Stainless Steel/Steel Twincut Plus A46U	230 x 2,0	50
6 AB001050404	Platinum	Fiber 1-1 GR40	125 Zirconia	60
7 AB001050406	Platinum	Fiber 1-1 GR60	125 Zirconia	40
8 AB001050408	Platinum	Fiber 1-1 GR80	125 Zirconia	40
9 AB001050412	Platinum	Fiber 1-1 GR120	125 Zirconia	20
10 AB001120104	Platinum	Fiber 1-1 GR40	125 Aluminium Oxide	40






Selection Cutting Discs and Flap Discs (Nylon backing pad)




Module Code	Description	
AB008880115	AM/115	970

Article Code	Line	Specification	Diameter x thickness	Quantity
1 AB000330115	Platinum	Stainless Steel/Steel Twincut Plus A46U	115 x 1,0	200
2 AB000330118	Platinum	Stainless Steel/Steel Twincut Plus A46U	115 x 1,6	200
3 AB000330125	Platinum	Stainless Steel/Steel Twincut Plus A46U	125 x 1,0	150
4 AB000330128	Platinum	Stainless Steel/Steel Twincut Plus A46U	125 x 1,6	150
5 AB000330230	Platinum	Stainless Steel/Steel Twincut Plus A46U	230 x 2,0	50
6 AB001050024	Platinum	Nylon 2-2 GR40	115 Zirconia	60
7 AB001050026	Platinum	Nylon 2-2 GR60	115 Zirconia	40
8 AB001050028	Platinum	Nylon 2-2 GR80	115 Zirconia	40
9 AB001050032	Platinum	Nylon 2-2 GR120	115 Zirconia	20
10 AB001070324	Platinum	Reinforced Nylon 2-2 GR40	115 Zirconia	60






Selection Cutting Discs and Flap Discs (Nylon backing pad)





Module Code	Description	
AB008880116	AM/116	950




Article Code	Line	Specification	Diameter x thickness	Quantity
1 AB000330115	Platinum	Stainless Steel/Steel Twincut Plus A46U	115 x 1,0	200
2 AB000330118	Platinum	Stainless Steel/Steel Twincut Plus A46U	115 x 1,6	200
3 AB000330125	Platinum	Stainless Steel/Steel Twincut Plus A46U	125 x 1,0	150
4 AB000330128	Platinum	Stainless Steel/Steel Twincut Plus A46U	125 x 1,6	150
5 AB000330230	Platinum	Stainless Steel/Steel Twincut Plus A46U	230 x 2,0	50
6 AB001050124	Platinum	Nylon 2-2 GR40	125 Zirconia	60
7 AB001050126	Platinum	Nylon 2-2 GR60	125 Zirconia	40
8 AB001050128	Platinum	Nylon 2-2 GR80	125 Zirconia	40
9 AB001140104	Diamond	Nylon 1-1 GR40	125 Ceramic-Zirconia	40
10 AB001140106	Diamond	Nylon 1-1 GR60	125 Ceramic-Zirconia	20




Selection Diamond Flap Discs (Fiber backing pad)

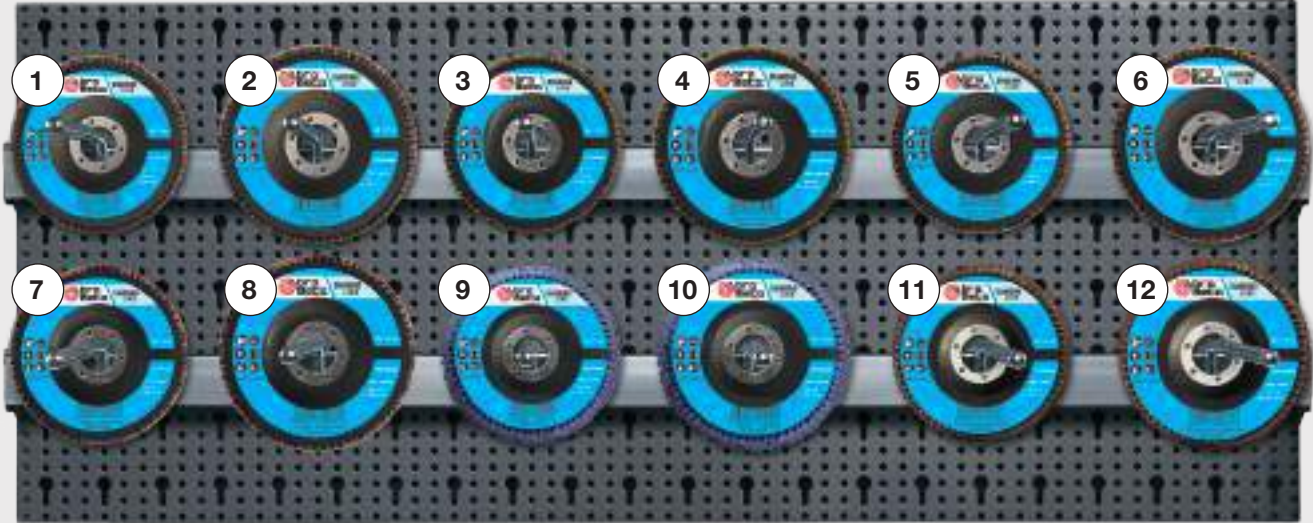




Module Code		Description			
AB008880117		AM/117		540	
Article Code	Line	Specification	Diameter x thickness	Quantity	
1 AB001090004	Diamond	Fiber 1-1 GR40	115 Zirconia Bigger	60	
2 AB001090104	Diamond	Fiber 1-1 GR40	125 Zirconia Bigger	60	
3 AB001141004	Diamond	Fiber 1-1 GR40	115 Ceramic-Zirconia	40	
4 AB001141104	Diamond	Fiber 1-1 GR40	125 Ceramic-Zirconia	40	
5 AB001151004	Diamond	Fiber 1-1 GR40	115 Ceramic	60	
6 AB001151104	Diamond	Fiber 1-1 GR40	125 Ceramic	60	
7 AB001160004	Diamond	Fiber 1-1 GR40	115 Stearate aluminium oxyde	40	
8 AB001160104	Diamond	Fiber 1-1 GR40	125 Stearate aluminium oxyde	40	
9 AB001080004	Diamond	Fiber 1-1 GR40	115 Soft zirconia	40	
10 AB001080104	Diamond	Fiber 1-1 GR40	125 Soft zirconia	40	
11 AB001080504	Diamond	Fiber 1-1 GR40	115 Soft ceramic	40	
12 AB001080604	Diamond	Fiber 1-1 GR40	125 Soft ceramic	20	




Selection Silver Flap Discs 115 mm (Fiber/Nylon backing pad)

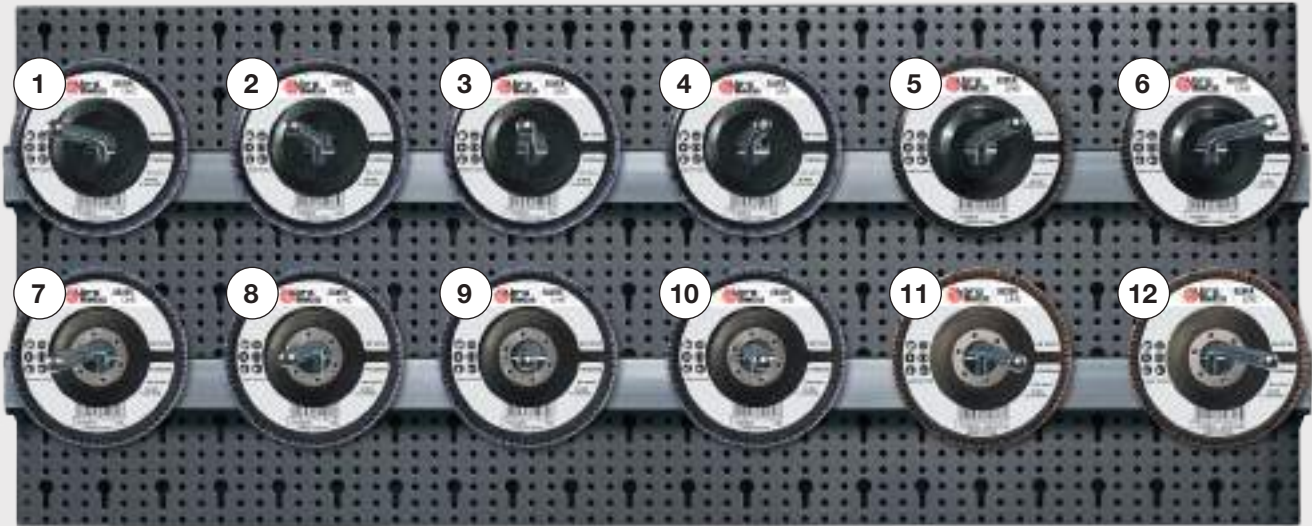


Module Code	Description			
AB008880118	AM/118		760	
Article Code	Line	Specification	Diameter x thickness	Quantity
1 AB001010024	Silver	Nylon 2-2 GR40	115 Zirconia	100
2 AB001010026	Silver	Nylon 2-2 GR60	115 Zirconia	60
3 AB001010028	Silver	Nylon 2-2 GR80	115 Zirconia	40
4 AB001010032	Silver	Nylon 2-2 GR120	115 Zirconia	20
5 AB001110004	Silver	Nylon 1-1 GR40	115 Aluminium Oxide	100
6 AB001110006	Silver	Nylon 1-1 GR60	115 Aluminium Oxide	60
7 AB001010304	Silver	Fiber 1-1 GR40	115 Zirconia	100
8 AB001010306	Silver	Fiber 1-1 GR60	115 Zirconia	60
9 AB001010308	Silver	Fiber 1-1 GR80	115 Zirconia	40
10 AB001010312	Silver	Fiber 1-1 GR120	115 Zirconia	20
11 AB001010804	Silver	Fiber 1-1 GR40	115 Zirconia Bigger	100
12 AB001010806	Silver	Fiber 1-1 GR60	115 Zirconia Bigger	60






Selection Silver Flap Discs 115/125 mm (Nylon backing pad)

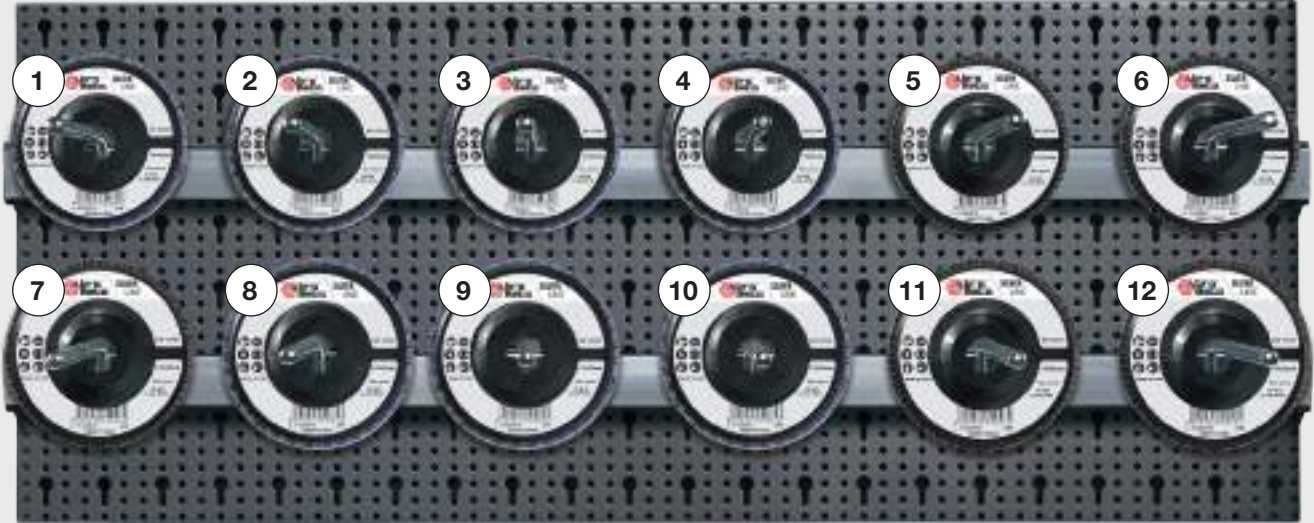



Module Code	Description	
AB008880119	AM/119	780

Article Code	Line	Specification	Diameter x thickness	Quantity
1 AB001010024	Silver	Nylon 2-2 GR40	115 Zirconia	100
2 AB001010026	Silver	Nylon 2-2 GR60	115 Zirconia	60
3 AB001010028	Silver	Nylon 2-2 GR80	115 Zirconia	40
4 AB001010032	Silver	Nylon 2-2 GR120	115 Zirconia	20
5 AB001110004	Silver	Nylon 1-1 GR40	115 Aluminium Oxide	100
6 AB001110006	Silver	Nylon 1-1 GR60	115 Aluminium Oxide	60
7 AB001110008	Silver	Nylon 1-1 GR80	115 Aluminium Oxide	40
8 AB001010124	Silver	Nylon 2-2 GR40	125 Zirconia	100
9 AB001010126	Silver	Nylon 2-2 GR60	125 Zirconia	60
10 AB001010128	Silver	Nylon 2-2 GR80	125 Zirconia	40
11 AB001110104	Silver	Nylon 1-1 GR40	125 Aluminium Oxide	100
12 AB001110106	Silver	Nylon 1-1 GR60	125 Aluminium Oxide	60






Selection Silver Flap Discs 115/125 mm (Fiber backing pad)

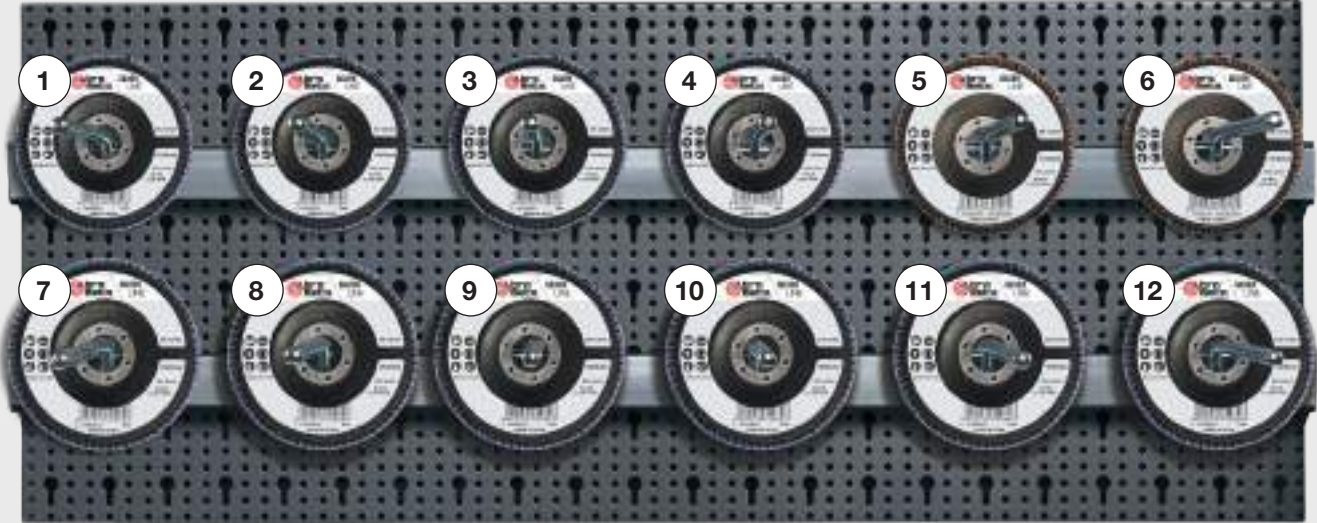


Module Code	Description	
AB008880120	AM/120	760

Article Code	Line	Specification	Diameter x thickness	Quantity
1 AB001010304	Silver	Fiber 1-1 GR40	115 Zirconia	100
2 AB001010306	Silver	Fiber 1-1 GR60	115 Zirconia	60
3 AB001010308	Silver	Fiber 1-1 GR80	115 Zirconia	40
4 AB001010312	Silver	Fiber 1-1 GR120	115 Zirconia	20
5 AB001010804	Silver	Fiber 1-1 GR40	115 Zirconia Bigger	100
6 AB001010806	Silver	Fiber 1-1 GR60	115 Zirconia Bigger	60
7 AB001010404	Silver	Fiber 1-1 GR40	125 Zirconia	100
8 AB001010406	Silver	Fiber 1-1 GR60	125 Zirconia	60
9 AB001010408	Silver	Fiber 1-1 GR80	125 Zirconia	40
10 AB001010412	Silver	Fiber 1-1 GR120	125 Zirconia	20
11 AB001010424	Silver	Fiber 2-2 GR40	125 Zirconia	100
12 AB001010426	Silver	Fiber 2-2 GR60	125 Zirconia	60






Selection Platinum Flap Discs 115 mm (Fiber/Nylon backing pad)





Module Code	Description	
AB008880121	AM/121	640




Article Code	Line	Specification	Diameter x thickness	Quantity
1 AB001050024	Platinum	Nylon 2-2 GR40	115 Zirconia	100
2 AB001050026	Platinum	Nylon 2-2 GR60	115 Zirconia	60
3 AB001050028	Platinum	Nylon 2-2 GR80	115 Zirconia	40
4 AB001050032	Platinum	Nylon 2-2 GR120	115 Zirconia	20
5 AB001070324	Platinum	Reinforced Nylon 2-2 GR40	115 Zirconia	60
6 AB001070326	Platinum	Reinforced Nylon 2-2 GR60	115 Zirconia	40
7 AB001050304	Platinum	Fiber 1-1 GR40	115 Zirconia	100
8 AB001050306	Platinum	Fiber 1-1 GR60	115 Zirconia	60
9 AB001050308	Platinum	Fiber 1-1 GR80	115 Zirconia	40
10 AB001050312	Platinum	Fiber 1-1 GR120	115 Zirconia	20
11 AB001120004	Platinum	Fiber 1-1 GR40	115 Aluminium Oxide	60
12 AB001120006	Platinum	Fiber 1-1 GR60	115 Aluminium Oxide	40



Selection Platinum Flap Discs 115/125 mm (Nylon backing pad)

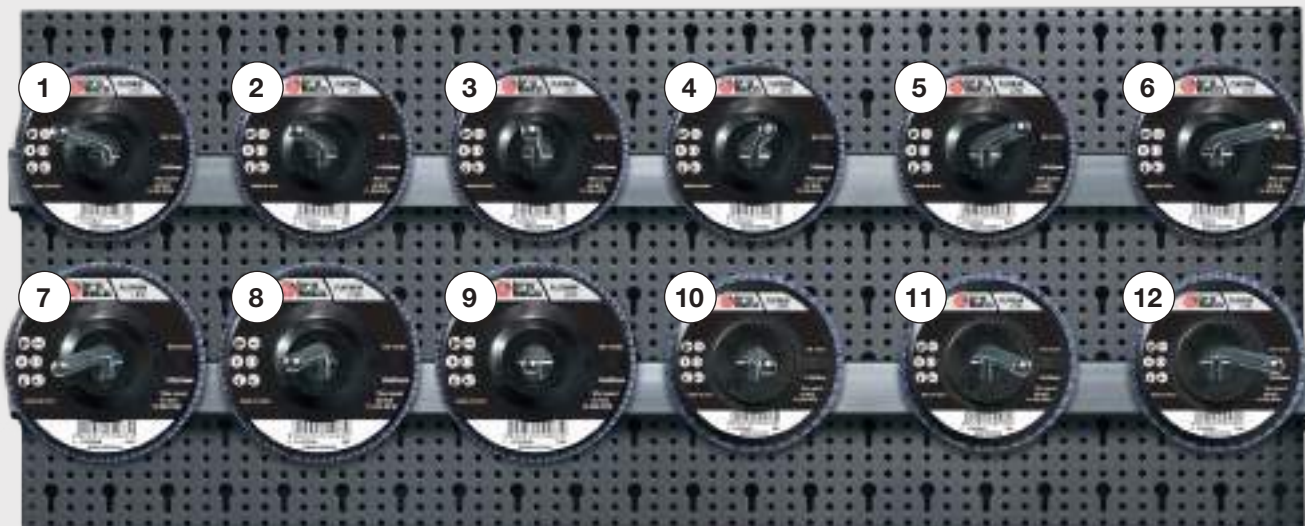





Module Code	Description			
AB008880122	AM/122		660	
Article Code	Line	Specification	Diameter x thickness	Quantity
1 AB001050024	Platinum	Nylon 2-2 GR40	115 Zirconia	100
2 AB001050026	Platinum	Nylon 2-2 GR60	115 Zirconia	60
3 AB001050028	Platinum	Nylon 2-2 GR80	115 Zirconia	40
4 AB001050032	Platinum	Nylon 2-2 GR120	115 Zirconia	20
5 AB001050004	Platinum	Nylon 1-1 GR40	115 Zirconia	60
6 AB001050006	Platinum	Nylon 1-1 GR60	115 Zirconia	40
7 AB001050124	Platinum	Nylon 2-2 GR40	125 Zirconia	100
8 AB001050126	Platinum	Nylon 2-2 GR60	125 Zirconia	60
9 AB001050128	Platinum	Nylon 2-2 GR80	125 Zirconia	40
10 AB001070324	Platinum	Reinforced Nylon 2-2 GR40	115 Zirconia	80
11 AB001070326	Platinum	Reinforced Nylon 2-2 GR60	115 Zirconia	40
12 AB001070328	Platinum	Reinforced Nylon 2-2 GR80	115 Zirconia	20



Selection Platinum Flap Discs 115/125 mm (Fiber backing pad)



Module Code		Description		 640	
AB008880123		AM/123			
Article Code	Line	Specification	Diameter x thickness	Quantity	
1 AB001050304	Platinum	Fiber 1-1 GR40	115 Zirconia	100	
2 AB001050306	Platinum	Fiber 1-1 GR60	115 Zirconia	60	
3 AB001050308	Platinum	Fiber 1-1 GR80	115 Zirconia	40	
4 AB001050312	Platinum	Fiber 1-1 GR120	115 Zirconia	20	
5 AB001120004	Platinum	Fiber 1-1 GR40	115 Aluminium Oxide	60	
6 AB001120006	Platinum	Fiber 1-1 GR60	115 Aluminium Oxide	40	
7 AB001050404	Platinum	Fiber 1-1 GR40	125 Zirconia	100	
8 AB001050406	Platinum	Fiber 1-1 GR60	125 Zirconia	60	
9 AB001050408	Platinum	Fiber 1-1 GR80	125 Zirconia	40	
10 AB001050412	Platinum	Fiber 1-1 GR120	125 Zirconia	20	
11 AB001120104	Platinum	Fiber 1-1 GR40	125 Aluminium Oxide	60	
12 AB001120106	Platinum	Fiber 1-1 GR60	125 Aluminium Oxide	40	






Selection Aluminium Oxide Flap Discs 115/125 mm



Module Code	Description	
AB008880124	AM/124	800


Article Code	Line	Specification	Diameter x thickness	Quantity
1 AB001120004	Platinum	Fiber 1-1 GR40	115 Aluminium Oxide	140
2 AB001120006	Platinum	Fiber 1-1 GR60	115 Aluminium Oxide	80
3 AB001120008	Platinum	Fiber 1-1 GR80	115 Aluminium Oxide	40
4 AB001120012	Platinum	Fiber 1-1 GR120	115 Aluminium Oxide	20
5 AB001120104	Platinum	Fiber 1-1 GR40	125 Aluminium Oxide	80
6 AB001120106	Platinum	Fiber 1-1 GR60	125 Aluminium Oxide	40

7 AB001110004	Silver	Nylon 1-1 GR40	115 Aluminium Oxide	140
8 AB001110006	Silver	Nylon 1-1 GR60	115 Aluminium Oxide	80
9 AB001110008	Silver	Nylon 1-1 GR80	115 Aluminium Oxide	40
10 AB001110012	Silver	Nylon 1-1 GR120	115 Aluminium Oxide	20
11 AB001110104	Silver	Nylon 1-1 GR40	125 Aluminium Oxide	80
12 AB001110106	Silver	Nylon 1-1 GR60	125 Aluminium Oxide	40






Selection Mounted Flap Wheels




Module Code	Description	
AB008880125	AM/125	775


Article Code	Line	Diameter x thickness	Grit	Quantity
1 AB001203166	Silver	30 x 15	GR60	100
2 AB001203186	Silver	30 x 15	GR80	100
3 AB001204266	Silver	40 x 20	GR60	75
4 AB001204286	Silver	40 x 20	GR80	75
5 AB001205266	Silver	50 x 20	GR60	50
6 AB001205286	Silver	50 x 20	GR80	50
7 AB001205366	Silver	50 x 30	GR60	50
8 AB001205386	Silver	50 x 30	GR80	50
9 AB001206366	Silver	60 x 30	GR60	75
10 AB001206386	Silver	60 x 30	GR80	75
11 AB001206396	Silver	60 x 30	GR120	75







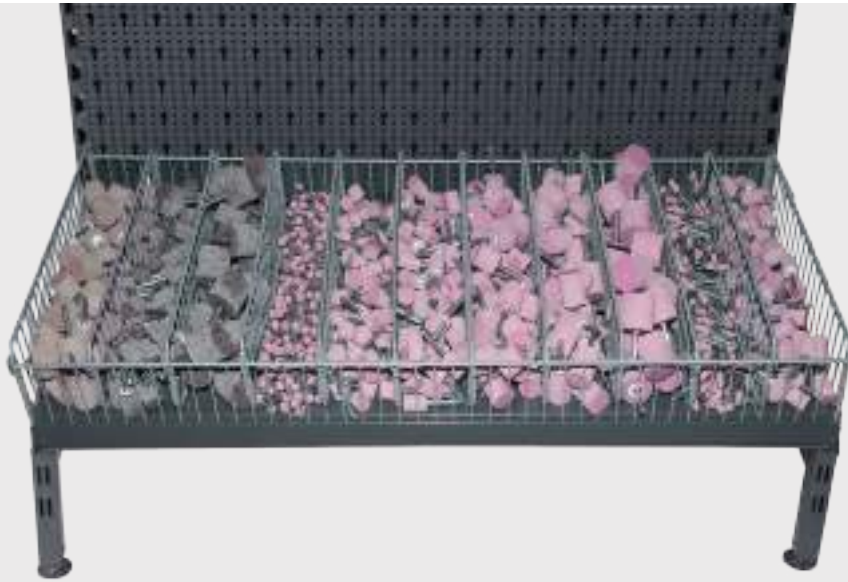

Selection Mounted Points




Module Code	Description	
AB008880126	AM/126	1.490

Article Code	Line	Diameter x thickness	Shaft	Figure	Quantity	
1 AB000920027 	Mounted point	Stainless Steel/Steel	30 x 30	6 x 40	Cylindrical	100
2 AB000940036 	Mounted point	Cast Iron	40 x 40	8 x 40	Cylindrical	40
3 AB000940006 	Mounted point	Cast Iron	20 x 30	6 x 40	Cylindrical	100
4 AB000900162 	Mounted point	Steel	30 x 30	6 x 40	Cylindrical	100

5 AB000902009 	Mounted point	Steel	10 x 20	6 x 40	Round Nose Cone	200
--	---------------	-------	---------	--------	-----------------	-----


6 AB000900165	Mounted point	Steel	30 x 40	6 x 40	Cylindrical	60
7 AB000900189 	Mounted point	Steel	40 x 40	6 x 40	Cylindrical	40
8 AB000900129	Mounted point	Steel	20 x 20	6 x 40	Cylindrical	200
9 AB000900033	Mounted point	Steel	10 x 10	3 x 37	Cylindrical	400

10 AB000908018 	Mounted point	Steel	15 x 30	6 x 80	Cylindrical (long shaft)	150
---	---------------	-------	---------	--------	--------------------------	-----

11 AB000900135 	Mounted point	Steel	20 x 30	6 x 40	Cylindrical	100
---	---------------	-------	---------	--------	-------------	-----

Display Unit C68N

Abra Beta empty display wall

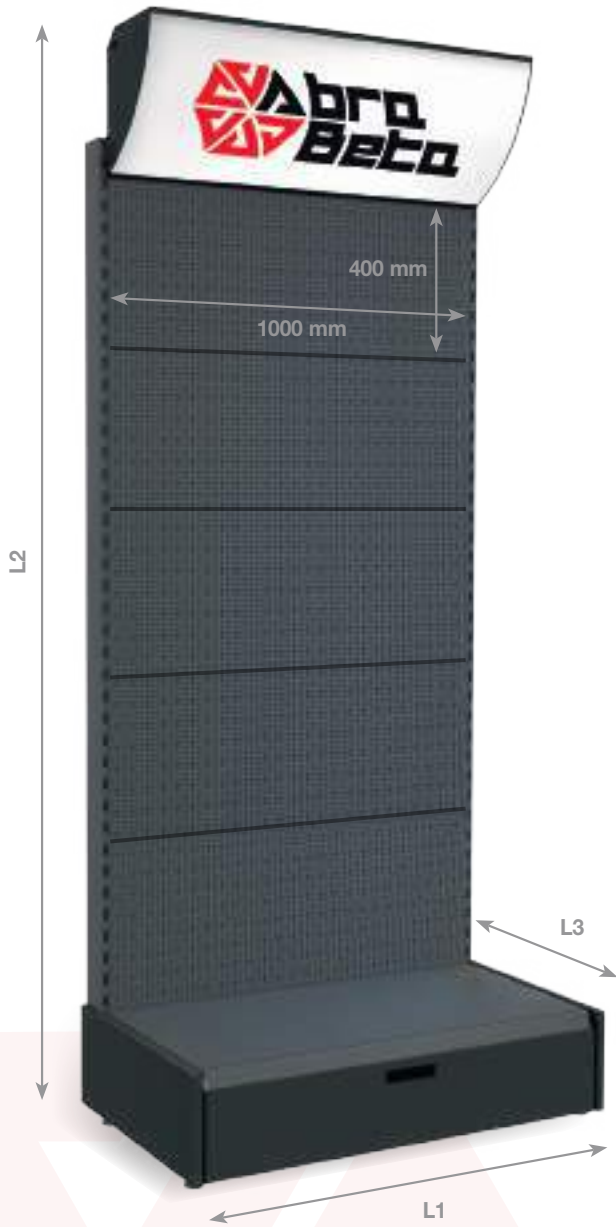

AB009996025999


1m complete with 5 wall panels

L1 mm	L2 mm	L3 mm	
1000	2200	560	1

AB009996000999

Tilting perforated bar
for abrasives


L1 mm	L2 mm	
1000	40	1




AB009996015999

Hook for abrasives

L1 mm	L2 mm	
200	50	1

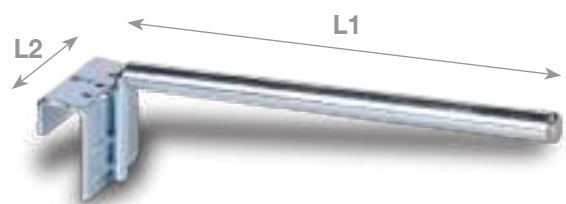

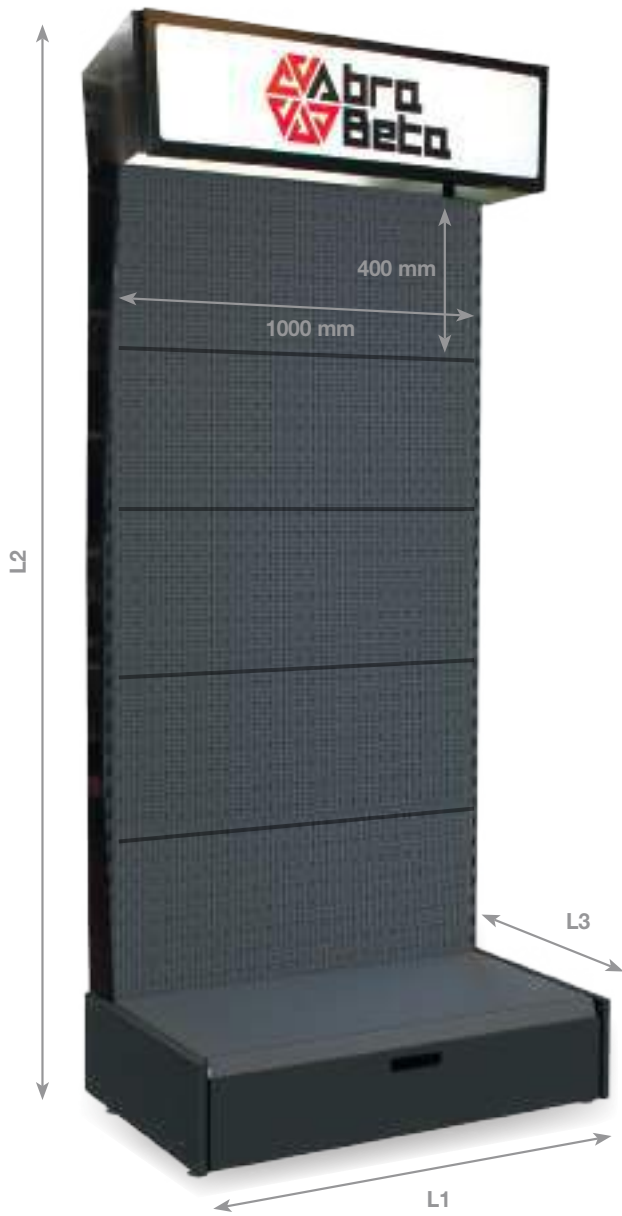

Display Unit C68

Abra Beta empty display wall


AB009996005999

1m complete with 5 wall panels

L1 mm	L2 mm	L3 mm	
1000	2200	560	1


AB009996000999
Tilting perforated bar
for abrasives

L1 mm	L2 mm	
1000	40	1



AB009996015999
Hook for abrasives

L1 mm	L2 mm	
200	50	1

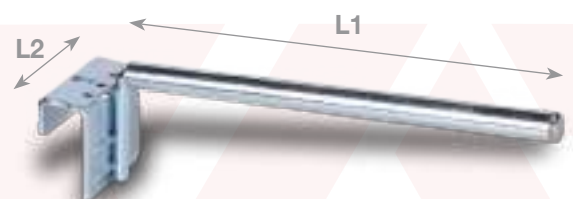



SHOP *in Shop*



GRUPPO
 **Beta**

 **Abra
Beta**

Abra Beta S.p.A.
Via delle Sorti, 10
25050 - Pian Camuno (BS) - Italy
Phone: +39 0364 590.792
info@abrabeta.it

