

EN



50°
1975
2025

abrabeta.it

CATALOGUE
2025







abrabeta.it



Abra Beta has been an outstanding benchmark for professionals operating in the abrasive sector since **1975**. Our industrial facility has always dedicated passion and utmost commitment to product quality and customer care. The company has grown over the years, consolidating its presence on both the domestic and international markets, earning itself a leader position in the production of bonded abrasives.

2025: we celebrate our 50 anniversary. An important milestone reached thanks to the constant efforts of our staff and the trust of our customers.



gruppo-beta.com

GRUPPO Beta

In **2018** Abra Beta joined the Beta Utensili Group, as part of a highly ambitious industrial growth project.

The continuing development strategy that Abra Beta and group pursue, has led to the acquisition in **2019** of **Elpa Abrasivi**, a leading company in the manufacture of coated abrasives. This merger has ensured our company has the technical, productive and commercial skills to be a competent and complete partner in the market.



Our range of over 1,400 products provide our partners with a complete and comprehensive service.



The mission of Abra Beta is to confirm its reputation as a reliable superior quality manufacturer for every single product it supplies.

All **Abra Beta** brand products in this catalogue are shipped from the Beta Utensili logistic centre.



The facility is located in Massalengo (Lodi), it covers an area of over **22,000 sqm** and handles **over 1,400** Abra Beta range products on a daily basis.

Abra Beta has set itself the goal of guaranteeing its partners rapid and reliable deliveries.



Visit the new **Abra Beta** simple
and user-friendly website for
all the latest news on our products
and business services!

abrabetait

Dischi Rigidi

Maggiori Informazioni →

Dischi Flessibili

Maggiori Informazioni →



Leader nella produzione di abrasivi professionali per la lavorazione di tutti i materiali.

Abra Beta rappresenta dal 1975 un punto di riferimento in settore mondiale per i prodotti e gli servizi offerti. Qualità dei prodotti e cura dei costi sono le parole chiave della politica di dell'impegno che caratterizzano le nostre realtà industriali. Nel corso degli anni Abbria ha cresciuto continuamente la sua gamma di prodotti e si è imposto nell'ambito una posizione da leader nella produzione di abrasivi rigidi. Nel 2008 abbiamo con orgoglio già una divisione di ricerca, un'intera struttura aggiornata grazie alla nostra vittoria nel nostro impegno nei confronti dei clienti.

Membri GSA

Siamo tra i primi ad aver implementato per la sicurezza degli adesivi, oltre che diversi altri sistemi di qualità, la certificazione ISO 9001. Siamo anche i primi ad aver implementato la sicurezza degli adesivi, oltre che diversi altri sistemi di qualità, la certificazione ISO 9001. Siamo anche i primi ad aver implementato la sicurezza degli adesivi, oltre che diversi altri sistemi di qualità, la certificazione ISO 9001.

OS
Organizzazione per la Sicurezza degli Adesivi

NUOVA DI PRODOTTO

Resta sempre aggiornato su tutte le novità e gli eventi Abra Beta

Linea Smart Abrasives

Linea Twin Cut Plus



NEW DISPLAY UNIT **C68N**

With this **Display Unit C68N**,
Abra Beta offers a versatile
and effective display solution
for points of sale.

The Display Unit is always
customisable to accommodate all
the Abra Beta catalogue products
according to the
specific requirements
of our partners.

For the set-up with predefined
assortments you will find all our
new solutions in the section
“SHOP IN SHOP” from page 135.

Always with **YOU!**



The Abra Beta Vans hold all the **top products** in our catalogue. At the request of our partners, our demonstrator technicians will visit your facility to perform trials on how to use our products and find the **best solutions** for each machining type.

Abra Beta has set itself the goal of providing **highly competent** technical support to align the products supplied by the company with specific market demands.

Index

SMART LINE

Solid Discs for Steel

| | | |
|-------------------------------|----|---|
| THINNER CUTTING DISCS | 18 | ■ |
| CUTTING DISCS | 18 | ■ |
| GRINDING DISCS | 19 | ■ |
| ZIRCONIA GRINDING DISCS | 19 | ■ |

Solid Discs for Stainless Steel

| | | |
|----------------------------|----|---|
| THINNER CUTTING DISCS..... | 20 | ■ |
| CUTTING DISCS | 21 | ■ |
| GRINDING DISCS | 21 | ■ |

Solid Discs for Stone

| | | |
|--------------------|----|---|
| CUTTING DISCS..... | 22 | ■ |
|--------------------|----|---|

Flap Discs

| | | |
|-------|----|---|
| | 23 | ■ |
|-------|----|---|

SILVER LINE

Solid Discs for Steel

| | | |
|-----------------------------|----|---|
| THINNER CUTTING DISCS | 28 | ■ |
| CUTTING DISCS | 29 | ■ |
| GRINDING DISCS | 31 | ■ |
| CUT-OFF DISCS | 34 | ■ |

Solid Discs for Stainless Steel

| | | |
|-----------------------------|----|---|
| THINNER CUTTING DISCS | 36 | ■ |
| CUTTING DISCS | 37 | ■ |
| GRINDING DISCS | 38 | ■ |

Solid Discs for Stainless Steel/Steel

| | | |
|-----------------------------|----|---|
| THINNER CUTTING DISCS | 39 | ■ |
| CUTTING DISCS | 41 | ■ |
| GRINDING DISCS | 41 | ■ |

Solid Discs for Stone

| | | |
|-----------------------------|----|---|
| THINNER CUTTING DISCS | 42 | ■ |
| CUTTING DISCS | 42 | ■ |
| GRINDING DISCS | 43 | ■ |
| CUT-OFF DISCS | 43 | ■ |

Solid Discs for Granite

| | | |
|---------------------|----|---|
| CUTTING DISCS | 44 | ■ |
|---------------------|----|---|

Solid Discs for Cast Iron

| | | |
|----------------------|----|---|
| GRINDING DISCS | 44 | ■ |
|----------------------|----|---|

Flap Discs

| | | |
|-------|----|---|
| | 46 | ■ |
|-------|----|---|

Mounted Flap Wheels

| | | |
|-------|----|---|
| | 50 | ■ |
|-------|----|---|

PLATINUM LINE

Solid Discs for Stainless Steel/Steel

| | | |
|--|----|---|
| THINNER CUTTING DISCS TWINCUT PLUS LINE | 54 | ■ |
|--|----|---|

Zirconia Solid Discs

| | | |
|--|----|---|
| THINNER CUTTING DISCS FOR STEEL..... | 56 | ■ |
| CUTTING DISCS FOR STEEL..... | 56 | ■ |
| GRINDING DISCS FOR STEEL | 57 | ■ |
| GRINDING DISCS FOR STEEL AND STAINLESS STEEL | 58 | ■ |
| GRINDING DISCS FOR STEEL | 58 | ■ |

| | | |
|---|-----|---|
| Flap Discs | .59 | ■ |
| Counterflange for flap discs with reinforced support | .61 | ■ |
| Mounted Flap Wheels | .63 | ■ |

DIAMOND LINE

| | | |
|----------------------------------|-----|---|
| Solid Discs for Aluminium | | |
| THINNER CUTTING DISCS | .66 | ■ |
| CUTTING DISCS | .66 | ■ |
| GRINDING DISCS | .67 | ■ |
| Flap Discs | .68 | ■ |
| Mounted Flap Wheels | .75 | ■ |

WHEELS WITH BORE

| | | |
|------------------------------------|-----|---|
| THREADED BORE FLAP WHEELS | .78 | ■ |
| WHEELS WITH M14 THREADED BORE..... | .80 | ■ |
| SATINEX WHEELS | .81 | ■ |

NON-WOVEN FABRIC

| | | |
|---------------------------------|-----|---|
| MOUNTED WHEELS | .84 | ■ |
| THREADED BORE FLAP WHEELS | .86 | ■ |
| SATINEX WHEELS | .87 | ■ |
| RADIAL DISCS | .89 | ■ |
| WASTE-FREE ROLLS | .90 | ■ |
| ABRASIVE SHEETS | .91 | ■ |

POLISHING PRODUCTS

| | | |
|----------------------------------|-----|---|
| FELT FLAP DISCS AND WHEELS | .94 | ■ |
| FELT MOUNTED POINTS..... | .95 | ■ |

VELCRO DISCS

| | | |
|------------------------------------|------|---|
| VELCRO DISCS | .98 | ■ |
| BACKING PADS FOR VELCRO DISCS..... | .102 | ■ |

FLEX DISCS

| | | |
|-----------------------------------|------|---|
| FIBER DISCS..... | .104 | ■ |
| BACKING PADS FOR FIBER DISCS..... | .106 | ■ |
| SEMI-FLEX DISCS | .107 | ■ |

STRIPPING PRODUCTS

| | | |
|-------------------------------------|------|---|
| MOUNTED STRIPPING WHEELS | .110 | ■ |
| MOUNTED STRIPPING DISCS | .110 | ■ |
| THREADED BORE UNITIZED DISCS..... | .111 | ■ |
| THREADED BORE STRIPPING DISCS | .112 | ■ |

ABRASIVE SPIROBANDS

| | | |
|------------------------|-----|---|
| SPIROBANDS | 114 | ■ |
| SPIROBAND HOLDER | 115 | ■ |

WASTE-FREE ROLLS

| | | |
|-------|-----|---|
| | 118 | ■ |
|-------|-----|---|

ABRASIVE BELTS

| | | |
|-------|-----|---|
| | 122 | ■ |
|-------|-----|---|

ABRASIVE SHEETS

| | | |
|-------|-----|---|
| | 124 | ■ |
|-------|-----|---|

MOUNTED POINTS FOR STEEL

| | | |
|------------------------------------|-----|---|
| CYLINDRICAL | 126 | ■ |
| CYLINDRICAL - TRUNCATED CONE | 127 | ■ |
| TRUNCATED CONE | 127 | ■ |
| ROUND NOSE CONE | 128 | ■ |
| CYLINDRICAL - POINTED TREE | 128 | ■ |
| CYLINDRICAL - STRAIGHT CONE | 128 | ■ |
| CYLINDRICAL WITH RADIUS END | 129 | ■ |
| BALL | 129 | ■ |
| KNIFE SHAPE | 129 | ■ |
| CYLINDRICAL - LONG SHAFT | 130 | ■ |
| BALL - LONG SHAFT | 130 | ■ |

MOUNTED POINTS FOR STAINLESS STEEL

| | | |
|----------------------------------|-----|---|
| CYLINDRICAL | 132 | ■ |
| ROUND NOSE CONE | 132 | ■ |
| CYLINDRICAL - POINTED TREE | 132 | ■ |

MOUNTED POINTS FOR CAST IRON

| | | |
|----------------------------------|-----|---|
| CYLINDRICAL | 134 | ■ |
| ROUND NOSE CONE | 134 | ■ |
| CYLINDRICAL - POINTED TREE | 134 | ■ |

SHOP IN SHOP

| | | |
|-------|-----|---|
| | 135 | ■ |
|-------|-----|---|

Guide to Solid Discs specifications



| | | | |
|---|---|------------------------------------|--|
| 230x3,2x22,23 | 9"x1/8"x7/8" | A30Q | STAINLESS STEEL/STEEL |
| Dimensions in mm diameter x thickness x bore | Dimensions in inches diameter x thickness x bore | Specification | Material on which disc is used |
| MAX SPEED | SHELF LIFE | A | C |
| Maximum operating speed in m/s and rpm | Stamped on the metal ring for bore 22,23; printed on the label contour for the others bores. | Aluminium Oxide | Silicon carbide |
| Instructions for safety use | AB000370230 | Z | 30 |
| | Article No. | Zirconia | Grit |
| Fe/S/Cl < 0,1% | Q | BF | Conformity with the standard |
| | Hardness | Reinforced bakelite | |
| Do not use for deburring | Use for deburring only | Do not use damaged disc | Do not use with hand-held power tools |

Guide to Flap Discs Specifications



115x22mm

Dimensions in mm
diameter x bore

Product bar code



8 020935 701096

Instructions for safety
use

EN 13743

Conformity with the
standard




AB001141004

Article No.



| CLOTH BACKING PAD | | |
|--|---|---|
| COTTON | POLYCOTTON | POLYESTERE |
| Versatile cloth, particularly suitable for not too heavy-duty rough grinding and finishing operations. | Stronger cloth than the classic cotton, suitable for heavier heavy-duty operations. Suitable to withstand a greater pressure on the work piece. | Extremely sturdy cloth, suitable for particularly heavy-duty operations involving a very high pressure on the work piece. |

| FLAT PROFILE | CONICAL PROFILE |
|--------------|-----------------|
|--------------|-----------------|



The flat profile Disc is used at a maximum angle of 15° and allows the machining of flat surfaces and edges.

In addition, by using the external part of the disc, more precise machining operations can be carried out.

The conical profile Disc is used at an angle of between 15° and 25° and simplifies operations on uneven surfaces.

It provides a larger contact surface between the disc and the work surface.

It allows the use of the sheets until they are completely worn out.

| NYLON BACKING PAD |
|-------------------|
|-------------------|



The nylon backing pad texture bestows elasticity to the disc, mitigating and reducing vibrations during use.

| FIBER GLASS BACKING PAD |
|-------------------------|
|-------------------------|



The fiber glass backing pad has a more rigid texture that allows greater pressure on the disc. In addition, the backing pad reduces the possibility of any residual traces accidentally left on the material during machining operation.

Guide to Flap Discs Specifications

LINE SMART - LINE SILVER - LINE PLATINUM

| DIAMETER/BORE (mm) | REVOLUTIONS PER MINUTE (Rpm) |
|--------------------|------------------------------|
| 115 x 22,23 | 13.300 |
| 125 x 22,23 | 12.250 |
| 180 x 22,23 | 8.500 |

LINE DIAMOND

| DIAMETER/BORE (mm) | REVOLUTIONS PER MINUTE (Rpm) |
|--------------------|------------------------------|
| 115 x 22,23 | 10.500 |
| 125 x 22,23 | 9.650 |
| 180 x 22,23 | 6.700 |

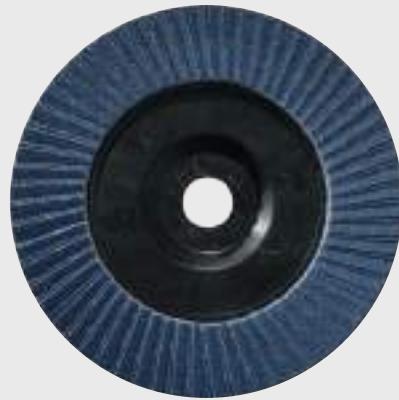
SINGLE-FLAP



The single-flap version allows for less aggressive and more accurate machining operation.

Particularly suitable for targeted operations requiring highest levels of precision for the finishing of work surfaces.

DOUBLE-FLAP



The double-flap version ensures more aggressiveness and higher disc cut rate.

Particularly suitable for heavier heavy-duty operations requiring high pressure on the work surfaces.

The Abra Beta Box


230x3,2x22,23

Dimensions in mm
diameter x thickness x bore

AB000370230

Article No.



Product profile



Instructions for safety use

9" x 1/8" x 7/8"

Dimensions in inches
diameter x thickness x bore

shelf life

Shelf life

A30Q

Specification

STAINLESS STEEL/STEEL

Material on which disc is used

A

Aluminium Oxide

C

Silicon carbide

Z

Zirconia

30

Grit

Q

Hardness

BF

Reinforced Bakelite



Product bar Code



Pcs per package


CERTIFICATIONS




abrabeto.it

The Smart Line discs
are designed for less
heavy and specialized use,
but still professional.
100% Made in Italy.



**SMART
LINE**





Solid Discs for Steel

A36R



APPLICATION

Universal use for cutting non-treated steels.

Accurate and concentrated material removal that reduces the power consumption of the power tool.

Minimized burr formation.

FEATURES


CUTTING SPEED



SERVICE LIFE



RECOMMENDED USE




Angle grinder

THINNER CUTTING DISCS - Flat Centre



| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000700115 | 115 | 1,0 | 22,23 | 13300 | 50 |
| AB000700116 | 115 | 1,2 | 22,23 | 13300 | 50 |
| AB000700118 | 115 | 1,6 | 22,23 | 13300 | 50 |
| AB000700125 | 125 | 1,0 | 22,23 | 12200 | 50 |
| AB000700126 | 125 | 1,2 | 22,23 | 12200 | 50 |
| AB000700128 | 125 | 1,6 | 22,23 | 12200 | 50 |
| AB000700230 | 230 | 2,0 | 22,23 | 6600 | 25 |

THINNER CUTTING DISCS - Depressed Centre



| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000701230 | 230 | 2,0 | 22,23 | 6600 | 25 |

A30R



APPLICATION

For cutting normal and medium alloy steels.

Also suitable for cutting heavy-duty cast irons.

The use of high power grinders for cutting medium-large sections is recommended.

FEATURES


CUTTING SPEED



SERVICE LIFE



RECOMMENDED USE



Angle grinder

CUTTING DISCS - Depressed Centre



| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000720115 | 115 | 3,2 | 22,23 | 13300 | 50 |
| AB000720125 | 125 | 3,2 | 22,23 | 12200 | 50 |
| AB000720233 | 230 | 3,0 | 22,23 | 6600 | 25 |



A24P

APPLICATION
For deburring steels with extended grinding surfaces and heavy-duty cast irons.

FEATURES


MATERIAL REMOVAL RATE



SERVICE LIFE



RECOMMENDED USE



Angle grinder



GRINDING DISCS - Depressed Centre

| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000730115 | 115 | 6,4 | 22,23 | 13300 | 50 |
| AB000730125 | 125 | 6,4 | 22,23 | 12200 | 50 |
| AB000730230 | 230 | 6,4 | 22,23 | 6600 | 25 |



ZA20RE

APPLICATION

Universal use for deburring steels and cast irons.

FEATURES


MATERIAL REMOVAL RATE



SERVICE LIFE




RECOMMENDED USE



Angle grinder

THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED



ZIRCONIA GRINDING DISCS - Depressed Centre

| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000750115 | 115 | 6,5 | 22,23 | 13300 | 50 |
| AB000750125 | 125 | 6,5 | 22,23 | 12200 | 50 |
| AB000750230 | 230 | 7,0 | 22,23 | 6600 | 25 |



Solid Discs for Stainless Steel

A36M



APPLICATION

For cutting stainless steels, steel alloys and treated steels.

Accurate and concentrated material removal that reduces the power consumption of the power tool.

Minimum heating of the disc.

Minimized burr formation.

FEATURES


CUTTING SPEED



SERVICE LIFE



RECOMMENDED USE




Angle grinder

THINNER CUTTING DISCS - Flat Centre



| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000760115 | 115 | 1,0 | 22,23 | 13300 | 50 |
| AB000760116 | 115 | 1,2 | 22,23 | 13300 | 50 |
| AB000760118 | 115 | 1,6 | 22,23 | 13300 | 50 |
| AB000760125 | 125 | 1,0 | 22,23 | 12200 | 50 |
| AB000760126 | 125 | 1,2 | 22,23 | 12200 | 50 |
| AB000760128 | 125 | 1,6 | 22,23 | 12200 | 50 |
| AB000760230 | 230 | 2,0 | 22,23 | 6600 | 25 |

THINNER CUTTING DISCS - Depressed Centre





| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000761230 | 230 | 2,0 | 22,23 | 6600 | 25 |


A30M

APPLICATION
For cutting stainless steels and steel alloys.
Also suitable for cutting hard cast irons.

FEATURES

CUTTING SPEED
■■■■■
 SERVICE LIFE
■■■■■

RECOMMENDED USE

Angle grinder
CUTTING DISCS - Depressed Centre




| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000770115 | 115 | 3,2 | 22,23 | 13300 | 50 |
| AB000770125 | 125 | 3,2 | 22,23 | 12200 | 50 |
| AB000770233 | 230 | 3,0 | 22,23 | 6600 | 25 |


A240

APPLICATION
For deburring stainless steels.
Also suitable for deburring hard cast irons.

FEATURES

MATERIAL REMOVAL RATE
■■■■■
 SERVICE LIFE
■■■■■

RECOMMENDED USE

Angle grinder
GRINDING DISCS - Depressed Centre


| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000780115 | 115 | 6,4 | 22,23 | 13300 | 50 |
| AB000780125 | 125 | 6,4 | 22,23 | 12200 | 50 |
| AB000780230 | 230 | 6,4 | 22,23 | 6600 | 25 |



Solid Discs for Stone

C30R



APPLICATION

For cutting stone, marble and concrete.

FEATURES


CUTTING SPEED



SERVICE LIFE




RECOMMENDED USE



Angle grinder

CUTTING DISCS - Depressed Centre



| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000790115 | 115 | 3,2 | 22,23 | 13300 | 50 |
| AB000790230 | 230 | 3,0 | 22,23 | 6600 | 25 |

The Smart Cutting and Grinding Discs Line guarantees exceptionally competitive prices on a wide range of superior quality products suitable for all main types of machining.






Flap Discs



APPLICATION

For a wide variety of not too heavy-duty machining operations on stainless steels, ferrous and non-ferrous metals.

RECOMMENDED USE



Angle grinder

NYLON BACKING PAD - Flat Profile



| Article No. | Diameter | Grit | Type | Max RPM | |
|-------------|----------|------|-------------|---------|----|
| AB001000004 | 115 | 40 | SINGLE-FLAP | 13.300 | 20 |
| AB001000006 | 115 | 60 | SINGLE-FLAP | 13.300 | 20 |
| AB001000008 | 115 | 80 | SINGLE-FLAP | 13.300 | 20 |
| AB001000012 | 115 | 120 | SINGLE-FLAP | 13.300 | 20 |
| AB001000024 | 115 | 40 | DOUBLE-FLAP | 13.300 | 20 |
| AB001000026 | 115 | 60 | DOUBLE-FLAP | 13.300 | 20 |
| AB001000028 | 115 | 80 | DOUBLE-FLAP | 13.300 | 20 |
| AB001000032 | 115 | 120 | DOUBLE-FLAP | 13.300 | 20 |
| AB001000104 | 125 | 40 | SINGLE-FLAP | 12.250 | 20 |
| AB001000106 | 125 | 60 | SINGLE-FLAP | 12.250 | 20 |
| AB001000108 | 125 | 80 | SINGLE-FLAP | 12.250 | 20 |
| AB001000112 | 125 | 120 | SINGLE-FLAP | 12.250 | 20 |
| AB001000124 | 125 | 40 | DOUBLE-FLAP | 12.250 | 20 |
| AB001000126 | 125 | 60 | DOUBLE-FLAP | 12.250 | 20 |
| AB001000128 | 125 | 80 | DOUBLE-FLAP | 12.250 | 20 |
| AB001000132 | 125 | 120 | DOUBLE-FLAP | 12.250 | 20 |



Flap Discs


ZIRCONIA CLOTH Cotton backing pad



APPLICATION

For a wide variety of not too heavy-duty machining operations on stainless steels, ferrous and non-ferrous metals.

RECOMMENDED USE



Angle grinder

FIBER GLASS BACKING PAD - Flat Profile



| Article No. | Diameter | Grit | Type | Max RPM | |
|-------------|----------|------|-------------|---------|----|
| AB001000304 | 115 | 40 | SINGLE-FLAP | 13.300 | 20 |
| AB001000306 | 115 | 60 | SINGLE-FLAP | 13.300 | 20 |
| AB001000308 | 115 | 80 | SINGLE-FLAP | 13.300 | 20 |
| AB001000312 | 115 | 120 | SINGLE-FLAP | 13.300 | 20 |
| AB001000324 | 115 | 40 | DOUBLE-FLAP | 13.300 | 20 |
| AB001000326 | 115 | 60 | DOUBLE-FLAP | 13.300 | 20 |
| AB001000328 | 115 | 80 | DOUBLE-FLAP | 13.300 | 20 |
| AB001000332 | 115 | 120 | DOUBLE-FLAP | 13.300 | 20 |
| AB001000404 | 125 | 40 | SINGLE-FLAP | 12.250 | 20 |
| AB001000406 | 125 | 60 | SINGLE-FLAP | 12.250 | 20 |
| AB001000408 | 125 | 80 | SINGLE-FLAP | 12.250 | 20 |
| AB001000412 | 125 | 120 | SINGLE-FLAP | 12.250 | 20 |
| AB001000424 | 125 | 40 | DOUBLE-FLAP | 12.250 | 20 |
| AB001000426 | 125 | 60 | DOUBLE-FLAP | 12.250 | 20 |
| AB001000428 | 125 | 80 | DOUBLE-FLAP | 12.250 | 20 |
| AB001000432 | 125 | 120 | DOUBLE-FLAP | 12.250 | 20 |

FIBER GLASS BACKING PAD - Conical Profile




| Article No. | Diameter | Grit | Type | Max RPM | |
|-------------|----------|------|-------------|---------|----|
| AB001000504 | 115 | 40 | SINGLE-FLAP | 13.300 | 20 |
| AB001000506 | 115 | 60 | SINGLE-FLAP | 13.300 | 20 |
| AB001000508 | 115 | 80 | SINGLE-FLAP | 13.300 | 20 |
| AB001000512 | 115 | 120 | SINGLE-FLAP | 13.300 | 20 |
| AB001000604 | 125 | 40 | SINGLE-FLAP | 12.250 | 20 |
| AB001000606 | 125 | 60 | SINGLE-FLAP | 12.250 | 20 |
| AB001000608 | 125 | 80 | SINGLE-FLAP | 12.250 | 20 |
| AB001000612 | 125 | 120 | SINGLE-FLAP | 12.250 | 20 |

ALUMINIUM OXIDE CLOTH

Cotton backing pad


APPLICATION

Universal use for not too heavy-duty machining operations on ferrous and non-ferrous metals and wood.

RECOMMENDED USE

Angle grinder
NYLON BACKING PAD - Flat Profile


| Article No. | Diameter | Grit | Type | Max RPM | |
|-------------|----------|------|-------------|---------|----|
| AB001100004 | 115 | 40 | SINGLE-FLAP | 13.300 | 20 |
| AB001100006 | 115 | 60 | SINGLE-FLAP | 13.300 | 20 |
| AB001100024 | 115 | 40 | DOUBLE-FLAP | 13.300 | 20 |
| AB001100026 | 115 | 60 | DOUBLE-FLAP | 13.300 | 20 |
| AB001100104 | 125 | 40 | SINGLE-FLAP | 12.250 | 20 |
| AB001100106 | 125 | 60 | SINGLE-FLAP | 12.250 | 20 |
| AB001100124 | 125 | 40 | DOUBLE-FLAP | 12.250 | 20 |
| AB001100126 | 125 | 60 | DOUBLE-FLAP | 12.250 | 20 |

The Smart Flap Discs line, designed for not too heavy-duty machining operations, proposes reliable and extremely competitive products guaranteed by the superior Made in Italy quality of Abra Beta.





abrabetait

The Silver Disc Line
guarantees an excellent
price-quality ratio.
The wide variety of products
available makes it particularly
versatile and ideal for all
high performance machining
operations.



SILVER LINE





Solid Discs for Steel

A36S



APPLICATION

Universal use for cutting non-treated steels.

Accurate and concentrated material removal that reduces the power consumption of the power tool.

Minimized burr formation.

FEATURES


CUTTING SPEED



SERVICE LIFE



RECOMMENDED USE



Angle grinder

THINNER CUTTING DISCS - Flat Centre



| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000010062 | 65 | 1,0 | 10,00 | 23500 | 50 |
| AB000010066 | 65 | 1,5 | 10,00 | 23500 | 50 |
| AB000010069 | 65 | 2,0 | 10,00 | 23500 | 50 |
| AB000010070 | 76 | 1,0 | 6,00 | 20100 | 50 |
| AB000010072 | 76 | 1,0 | 10,00 | 20100 | 50 |
| AB000010076 | 76 | 1,5 | 10,00 | 20100 | 50 |
| AB000010079 | 76 | 2,0 | 10,00 | 20100 | 50 |
| AB000010100 | 100 | 1,2 | 15,88 | 15300 | 50 |
| AB000010115 | 115 | 1,0 | 22,23 | 13300 | 50 |
| AB000010117 | 115 | 1,2 | 22,23 | 13300 | 50 |
| AB000010119 | 115 | 1,6 | 22,23 | 13300 | 50 |
| AB000010125 | 125 | 1,0 | 22,23 | 12200 | 50 |
| AB000010127 | 125 | 1,2 | 22,23 | 12200 | 50 |
| AB000010129 | 125 | 1,6 | 22,23 | 12200 | 50 |
| AB000010150 | 150 | 1,6 | 22,23 | 10200 | 50 |
| AB000010180 | 180 | 2,0 | 22,23 | 8500 | 25 |
| AB000010230 | 230 | 2,0 | 22,23 | 6600 | 25 |

THINNER CUTTING DISCS - Depressed Centre



| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000020230 | 230 | 2,0 | 22,23 | 6600 | 25 |

A30S

APPLICATION

For cutting normal and medium alloy steels.

Also suitable for cutting heavy-duty cast irons.


The use of high power grinders for cutting medium-large sections is recommended.

FEATURES

CUTTING SPEED



SERVICE LIFE


RECOMMENDED USE


Angle grinder

CUTTING DISCS - Depressed Centre

| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000050076 | 76 | 3,2 | 10,00 | 20100 | 50 |
| AB000050100 | 100 | 3,2 | 15,88 | 15300 | 50 |
| AB000050115 | 115 | 3,2 | 22,23 | 13300 | 50 |
| AB000050125 | 125 | 3,2 | 22,23 | 12200 | 50 |
| AB000050150 | 150 | 3,2 | 22,23 | 10200 | 50 |
| AB000050180 | 180 | 3,2 | 22,23 | 8500 | 25 |
| AB000050230 | 230 | 3,2 | 22,23 | 6600 | 25 |

A30T

APPLICATION

For cutting normal and medium alloy steels.

The use of high power grinders for cutting medium-large sections is recommended.


The higher abrasive hardness grants a longer service life of the disc.

FEATURES

CUTTING SPEED



SERVICE LIFE


RECOMMENDED USE


Angle grinder

CUTTING DISCS - Depressed Centre

| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000051115 | 115 | 2,5 | 22,23 | 13300 | 50 |
| AB000051118 | 115 | 3,2 | 22,23 | 13300 | 50 |
| AB000051125 | 125 | 2,5 | 22,23 | 12200 | 50 |
| AB000051128 | 125 | 3,2 | 22,23 | 12200 | 50 |
| AB000051150 | 150 | 2,5 | 22,23 | 10200 | 50 |
| AB000051180 | 180 | 2,5 | 22,23 | 8500 | 25 |
| AB000051230 | 230 | 2,5 | 22,23 | 6600 | 25 |
| AB000051233 | 230 | 3,2 | 22,23 | 6600 | 25 |



Solid Discs for Steel

A30S



APPLICATION

For cutting normal and medium alloy steels.

Also suitable for cutting heavy-duty cast irons.

The use of high power grinders for cutting medium-large sections is recommended.

FEATURES


CUTTING SPEED



SERVICE LIFE



RECOMMENDED USE



Angle grinder

CUTTING DISCS - Flat Centre



Article No.

Diameter

Thickness

Bore

Max RPM



AB000040076

76

3,2

10,00

20100

50

AB000040115

115

3,2

22,23

13300

50

AB000040125

125

3,2

22,23

12200

50

AB000040230

230

3,2

22,23

6600

25

A30T



APPLICATION

For cutting normal and medium alloy steels.

The use of high power grinders for cutting medium-large sections is recommended.

The higher abrasive hardness grants a longer service life of the disc.

FEATURES

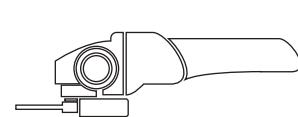
CUTTING SPEED



SERVICE LIFE



RECOMMENDED USE



Angle grinder

CUTTING DISCS - Flat Centre



Article No.

Diameter

Thickness

Bore

Max RPM



AB000041115

115

2,5

22,23

13300

50

AB000041125

125

2,5

22,23

12200

50

AB000041180

180

2,5

22,23

8500

25

AB000041230

230

2,5

22,23

6600

25

A24N

APPLICATION


For deburring steels with extended grinding surfaces and heavy-duty cast irons.

FEATURES

MATERIAL REMOVAL RATE



SERVICE LIFE


RECOMMENDED USE


Angle grinder

GRINDING DISCS - Depressed Centre

| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000070076 | 76 | 6,5 | 10,00 | 20100 | 50 |
| AB000070106 | 100 | 6,5 | 15,88 | 15300 | 50 |
| AB000070115 | 115 | 4,5 | 22,23 | 13300 | 50 |
| AB000070118 | 115 | 6,5 | 22,23 | 13300 | 50 |
| AB000070126 | 125 | 4,5 | 22,23 | 12200 | 50 |
| AB000070128 | 125 | 6,5 | 22,23 | 12200 | 50 |
| AB000070154 | 150 | 4,5 | 22,23 | 10200 | 25 |
| AB000070156 | 150 | 6,5 | 22,23 | 10200 | 25 |
| AB000070184 | 180 | 4,5 | 22,23 | 8500 | 25 |
| AB000070186 | 180 | 6,5 | 22,23 | 8500 | 25 |
| AB000070234 | 230 | 4,5 | 22,23 | 6600 | 20 |
| AB000070236 | 230 | 6,5 | 22,23 | 6600 | 25 |
| AB000070238 | 230 | 8,0 | 22,23 | 6600 | 20 |





Solid Discs for Steel

A24R



APPLICATION

For deburring steels on weld seams and sharp edges.

The higher abrasive hardness grants a longer service life of the disc.

FEATURES


MATERIAL REMOVAL RATE



SERVICE LIFE



RECOMMENDED USE



Angle grinder

GRINDING DISCS - Depressed Centre



| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000071115 | 115 | 6,5 | 22,23 | 13300 | 50 |
| AB000071125 | 125 | 6,5 | 22,23 | 12200 | 50 |
| AB000071150 | 150 | 6,5 | 22,23 | 10200 | 25 |
| AB000071180 | 180 | 6,5 | 22,23 | 8500 | 25 |
| AB000071230 | 230 | 6,5 | 22,23 | 6600 | 25 |

A24S



APPLICATION

For deburring steels on weld seams and sharp edges.

The extreme abrasive hardness maximizes the disc service life.

FEATURES


MATERIAL REMOVAL RATE



SERVICE LIFE



RECOMMENDED USE



Angle grinder

THE USE OF HIGH POWER GRINDERS
IS STRONGLY RECOMMENDED



GRINDING DISCS - Depressed Centre

| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000072115 | 115 | 6,5 | 22,23 | 13300 | 50 |
| AB000072150 | 150 | 6,5 | 22,23 | 10200 | 25 |
| AB000072230 | 230 | 6,5 | 22,23 | 6600 | 25 |

A24N

APPLICATION

For deburring steels with extended grinding surfaces and heavy-duty cast irons.


The use of grinders equipped for conical profile is required.

FEATURES

MATERIAL REMOVAL RATE




SERVICE LIFE


RECOMMENDED USE


Angle grinder

GRINDING DISCS - Conical Depressed Centre

| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000080125 | 125 | 6,5 | 22,23 | 12200 | 40 |
| AB000080230 | 230 | 6,5 | 22,23 | 6600 | 20 |



40

20



Solid Discs for Steel

A46N



APPLICATION

For cutting small and medium size steels.

The use of single-phase bench machines is required.

FEATURES


CUTTING SPEED



SERVICE LIFE



RECOMMENDED USE



Single-phase bench cut-off machine

CUT-OFF DISCS 63 M/S - Flat Centre



| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000090300 | 300 | 2,5 | 25,40 | 4010 | 25 |
| AB000090350 | 350 | 3,0 | 25,40 | 3440 | 10 |
| AB000090400 | 400 | 3,2 | 25,40 | 3010 | 10 |

A24N



APPLICATION

Universal use for cutting steels.

The use of medium and/or high power stationary cut-off machines is required.

FEATURES


CUTTING SPEED



SERVICE LIFE



RECOMMENDED USE



3-Phase bench cut-off machine

CUT-OFF DISCS 80 M/S - Flat Centre



| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000091300 | 300 | 3,8 | 22,23 | 5100 | 25 |
| AB000091303 | 300 | 3,8 | 25,40 | 5100 | 25 |
| AB000091306 | 300 | 3,8 | 30,00 | 5100 | 25 |
| AB000091350 | 350 | 4,2 | 25,40 | 4400 | 10 |
| AB000091353 | 350 | 4,2 | 30,00 | 4400 | 10 |
| AB000091400 | 400 | 4,5 | 25,40 | 3800 | 10 |
| AB000091403 | 400 | 4,5 | 30,00 | 3800 | 10 |
| AB000091406 | 400 | 4,5 | 40,00 | 3800 | 10 |


A30S
APPLICATION

Universal use for cutting steels.

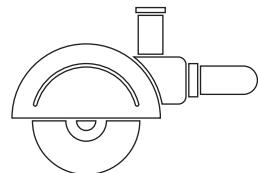
The use of hand-held combustion engine machines is required.

FEATURES

CUTTING SPEED



SERVICE LIFE


RECOMMENDED USE


Hand-held combustion engine cut-off machine


CUT-OFF DISCS 100 M/S - Flat Centre

| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000092300 | 300 | 3,8 | 20,00 | 6370 | 25 |
| AB000092350 | 350 | 4,2 | 20,00 | 5460 | 10 |
| AB000092356 | 350 | 4,2 | 25,40 | 5460 | 10 |
| AB000092400 | 400 | 4,5 | 25,40 | 4800 | 10 |





Solid Discs for Stainless Steel

A36N



APPLICATION

For cutting stainless steels, steel alloys and treated steels.

Accurate and concentrated material removal that reduces the power consumption of the power tool.

Minimum heating of the disc.

Minimized burr formation.

FEATURES


CUTTING SPEED



SERVICE LIFE



RECOMMENDED USE



Angle grinder

THINNER CUTTING DISCS - Flat Centre



| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000200071 | 76 | 1,0 | 10,00 | 20100 | 50 |
| AB000200074 | 76 | 1,6 | 10,00 | 20100 | 50 |
| AB000200100 | 100 | 1,2 | 15,88 | 15300 | 50 |
| AB000200105 | 100 | 1,6 | 15,88 | 15300 | 50 |
| AB000200115 | 115 | 1,0 | 22,23 | 13300 | 50 |
| AB000200116 | 115 | 1,2 | 22,23 | 13300 | 50 |
| AB000200118 | 115 | 1,6 | 22,23 | 13300 | 50 |
| AB000200125 | 125 | 1,0 | 22,23 | 12200 | 50 |
| AB000200126 | 125 | 1,2 | 22,23 | 12200 | 50 |
| AB000200128 | 125 | 1,6 | 22,23 | 12200 | 50 |
| AB000200150 | 150 | 1,6 | 22,23 | 10200 | 50 |
| AB000200180 | 180 | 2,0 | 22,23 | 8500 | 25 |
| AB000200230 | 230 | 2,0 | 22,23 | 6600 | 25 |

THINNER CUTTING DISCS - Depressed Centre



| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000210230 | 230 | 2,0 | 22,23 | 6600 | 25 |

| A36N | APPLICATION | FEATURES | RECOMMENDED USE |
|--------------------|---|--|----------------------|
| <p>A36N</p> | <p>For cutting stainless steels and steel alloys.</p> <p>Also suitable for cutting hard cast irons.</p> | <p>CUTTING SPEED ■ ■ ■ ■ ■</p> <p>SERVICE LIFE ■ ■ ■ ■ ■</p> | <p>Angle grinder</p> |

CUTTING DISCS - Depressed Centre

| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000240102 | 100 | 3,2 | 15,88 | 15300 | 50 |
| AB000240115 | 115 | 2,5 | 22,23 | 13300 | 50 |
| AB000240117 | 115 | 3,2 | 22,23 | 13300 | 50 |
| AB000240125 | 125 | 2,5 | 22,23 | 12200 | 50 |
| AB000240127 | 125 | 3,2 | 22,23 | 12200 | 50 |
| AB000240150 | 150 | 2,5 | 22,23 | 10200 | 50 |
| AB000240152 | 150 | 3,2 | 22,23 | 10200 | 50 |
| AB000240230 | 230 | 2,5 | 22,23 | 6600 | 25 |
| AB000240232 | 230 | 3,2 | 22,23 | 6600 | 25 |

CUTTING DISCS - Flat Centre

| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000230115 | 115 | 2,5 | 22,23 | 13300 | 50 |
| AB000230125 | 125 | 2,5 | 22,23 | 12200 | 50 |
| AB000230230 | 230 | 2,5 | 22,23 | 6600 | 25 |



Solid Discs for Stainless Steel

A30P



APPLICATION

For deburring stainless steels.
Also suitable for deburring hard cast irons.

FEATURES


MATERIAL REMOVAL RATE



SERVICE LIFE



RECOMMENDED USE



Angle grinder

GRINDING DISCS - Depressed Centre



| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000260100 | 100 | 6,5 | 15,88 | 15300 | 50 |
| AB000260115 | 115 | 6,5 | 22,23 | 13300 | 50 |
| AB000260125 | 125 | 6,5 | 22,23 | 12200 | 50 |
| AB000260150 | 150 | 6,5 | 22,23 | 10200 | 25 |
| AB000260180 | 180 | 6,5 | 22,23 | 8500 | 25 |
| AB000260230 | 230 | 6,5 | 22,23 | 6600 | 25 |

Solid Discs for Stainless Steel/Steel

A46Q



APPLICATION

Universal use for cutting stainless steels, steel alloys and treated and non-treated steels.

Minimized burr formation

FEATURES


CUTTING SPEED



SERVICE LIFE



RECOMMENDED USE



Angle grinder

THINNER CUTTING DISCS - Flat Centre

| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000300115 | 115 | 1,0 | 22,23 | 13300 | 50 |
| AB000300116 | 115 | 1,2 | 22,23 | 13300 | 50 |
| AB000300118 | 115 | 1,6 | 22,23 | 13300 | 50 |
| AB000300125 | 125 | 1,0 | 22,23 | 12200 | 50 |
| AB000300126 | 125 | 1,2 | 22,23 | 12200 | 50 |
| AB000300128 | 125 | 1,6 | 22,23 | 12200 | 50 |
| AB000300150 | 150 | 1,6 | 22,23 | 10200 | 50 |

A36Q



APPLICATION

Universal use for cutting stainless steels, steel alloys and treated and non-treated steels.

FEATURES


CUTTING SPEED



SERVICE LIFE






RECOMMENDED USE



Angle grinder

THINNER CUTTING DISCS - Flat Centre

| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000300230 | 230 | 2,0 | 22,23 | 6600 | 25 |





Solid Discs for Stainless Steel/Steel

A46S



APPLICATION

Universal use for cutting stainless steels, steel alloys and treated and non-treated steels.

Minimum heating of the disc.

Exceptionally rapid and accurate cutting.

FEATURES


CUTTING SPEED



SERVICE LIFE




RECOMMENDED USE



Angle grinder

THINNER CUTTING DISCS - Depressed Centre



| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000310115 | 115* | 0,9 | 22,23 | 13300 | 50 |
| AB000310125 | 125* | 0,9 | 22,23 | 12200 | 50 |

*Clamping the safety flange to the disc is recommended. Each package contains a flange included in the price.

A36Q



APPLICATION

Universal use for cutting stainless steels, steel alloys and treated and non treated steels.

FEATURES


CUTTING SPEED



SERVICE LIFE



RECOMMENDED USE



Angle grinder

THINNER CUTTING DISCS - Depressed Centre



| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000310230 | 230 | 2,0 | 22,23 | 6600 | 25 |

A30Q

APPLICATION


For cutting steels, stainless steels, steel alloys and medium alloy steels, heavy-duty and hard cast irons.

FEATURES

CUTTING SPEED



SERVICE LIFE


RECOMMENDED USE

Angle grinder
CUTTING DISCS - Depressed Centre

| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000370115 | 115 | 3,2 | 22,23 | 13300 | 50 |
| AB000370125 | 125 | 3,2 | 22,23 | 12200 | 50 |
| AB000370150 | 150 | 3,2 | 22,23 | 10200 | 50 |
| AB000370180 | 180 | 3,2 | 22,23 | 8500 | 25 |
| AB000370230 | 230 | 3,2 | 22,23 | 6600 | 25 |

A24Q

APPLICATION

For deburring steels, stainless steels and heavy-duty cast irons.


Suitable for deburring on extended surfaces.

FEATURES

MATERIAL REMOVAL RATE



SERVICE LIFE


RECOMMENDED USE

Angle grinder
GRINDING DISCS - Depressed Centre

| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000380115 | 115 | 6,5 | 22,23 | 13300 | 50 |
| AB000380125 | 125 | 6,5 | 22,23 | 12200 | 50 |
| AB000380150 | 150 | 6,5 | 22,23 | 10200 | 25 |
| AB000380180 | 180 | 6,5 | 22,23 | 8500 | 25 |
| AB000380230 | 230 | 6,5 | 22,23 | 6600 | 25 |





Solid Discs for Stone

C36S



APPLICATION

For cutting stone, marble and concrete.

FEATURES


CUTTING SPEED



SERVICE LIFE



RECOMMENDED USE



Angle grinder

THINNER CUTTING DISCS FOR STONE - Flat Centre



| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000500115 | 115 | 1,6 | 22,23 | 13300 | 50 |
| AB000500230 | 230 | 2,0 | 22,23 | 6600 | 25 |

C30S



APPLICATION

For cutting stone, marble and concrete.

FEATURES


CUTTING SPEED



SERVICE LIFE



RECOMMENDED USE



Angle grinder

CUTTING DISCS FOR STONE - Depressed Centre



| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000560115 | 115 | 2,5 | 22,23 | 13300 | 50 |
| AB000560118 | 115 | 3,2 | 22,23 | 13300 | 50 |
| AB000560128 | 125 | 3,2 | 22,23 | 12200 | 50 |
| AB000560233 | 230 | 3,2 | 22,23 | 6600 | 25 |


C24R


APPLICATION
For deburring stone, marble and concrete.

FEATURES

MATERIAL REMOVAL RATE



SERVICE LIFE


RECOMMENDED USE


Angle grinder


GRINDING DISCS FOR STONE - Depressed Centre

| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000570115 | 115 | 6,5 | 22,23 | 13300 | 50 |
| AB000570125 | 125 | 6,5 | 22,23 | 12200 | 50 |
| AB000570230 | 230 | 6,5 | 22,23 | 6600 | 25 |


C30S
APPLICATION

For cutting stone, marble and concrete.

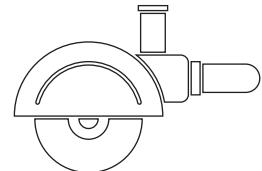
The use of hand-held combustion engine cut-off machines is required.

FEATURES

CUTTING SPEED



SERVICE LIFE


RECOMMENDED USE


Hand-held combustion engine cut-off machine


CUT-OFF DISCS FOR STONE 100 M/S - Flat Centre

| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000581300 | 300 | 3,8 | 20,00 | 6370 | 25 |
| AB000581302 | 300 | 3,8 | 22,23 | 6370 | 25 |
| AB000581350 | 350 | 4,2 | 20,00 | 5460 | 10 |



Solid Discs for Granite

C30P



APPLICATION

For cutting granite and concrete.

FEATURES


CUTTING SPEED



SERVICE LIFE




RECOMMENDED USE



Angle grinder

CUTTING DISCS FOR GRANITE - Depressed Centre



| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000561230 | 230 | 3,2 | 22,23 | 6600 | 25 |



Solid Discs for Cast Iron

C24Q



APPLICATION

For deburring all types of cast iron.

FEATURES


MATERIAL REMOVAL RATE



SERVICE LIFE




RECOMMENDED USE



Angle grinder

GRINDING DISCS - Depressed Centre



| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000670115 | 115 | 6,5 | 22,23 | 13300 | 50 |
| AB000670125 | 125 | 6,5 | 22,23 | 12200 | 50 |
| AB000670230 | 230 | 6,5 | 22,23 | 6600 | 25 |





Flap Discs

ZIRCONIA CLOTH Cotton Backing Pad




APPLICATION

For operations on stainless steels, ferrous and non-ferrous metals.

Coarse grits are suitable for grinding and rough grinding operations, fine grits are particularly suitable for finishing operations.

RECOMMENDED USE



Angle grinder

NYLON BACKING PAD - Flat Profile



| Article No. | Diameter | Grit | Type | Max RPM | |
|-------------|----------|------|-------------|---------|----|
| AB001010004 | 115 | 40 | SINGLE-FLAP | 13.300 | 20 |
| AB001010006 | 115 | 60 | SINGLE-FLAP | 13.300 | 20 |
| AB001010008 | 115 | 80 | SINGLE-FLAP | 13.300 | 20 |
| AB001010012 | 115 | 120 | SINGLE-FLAP | 13.300 | 20 |
| AB001010024 | 115 | 40 | DOUBLE-FLAP | 13.300 | 20 |
| AB001010026 | 115 | 60 | DOUBLE-FLAP | 13.300 | 20 |
| AB001010028 | 115 | 80 | DOUBLE-FLAP | 13.300 | 20 |
| AB001010032 | 115 | 120 | DOUBLE-FLAP | 13.300 | 20 |
| AB001010104 | 125 | 40 | SINGLE-FLAP | 12.250 | 20 |
| AB001010106 | 125 | 60 | SINGLE-FLAP | 12.250 | 20 |
| AB001010108 | 125 | 80 | SINGLE-FLAP | 12.250 | 20 |
| AB001010124 | 125 | 40 | DOUBLE-FLAP | 12.250 | 20 |
| AB001010126 | 125 | 60 | DOUBLE-FLAP | 12.250 | 20 |
| AB001010128 | 125 | 80 | DOUBLE-FLAP | 12.250 | 20 |
| AB001010204 | 180 | 40 | DOUBLE-FLAP | 8.500 | 10 |
| AB001010206 | 180 | 60 | DOUBLE-FLAP | 8.500 | 10 |

ZIRCONIA CLOTH
Cotton backing pad




APPLICATION

For operations on stainless steels, ferrous and non-ferrous metals.

Coarse grits are suitable for grinding and rough grinding operations, fine grits are particularly suitable for finishing operations.

RECOMMENDED USE



Angle grinder

FIBER GLASS BACKING PAD - Flat Profile



| Article No. | Diameter | Grit | Type | Max RPM | |
|-------------|----------|------|-------------|---------|----|
| AB001010304 | 115 | 40 | SINGLE-FLAP | 13.300 | 20 |
| AB001010306 | 115 | 60 | SINGLE-FLAP | 13.300 | 20 |
| AB001010308 | 115 | 80 | SINGLE-FLAP | 13.300 | 20 |
| AB001010312 | 115 | 120 | SINGLE-FLAP | 13.300 | 20 |
| AB001010324 | 115 | 40 | DOUBLE-FLAP | 13.300 | 20 |
| AB001010326 | 115 | 60 | DOUBLE-FLAP | 13.300 | 20 |
| AB001010404 | 125 | 40 | SINGLE-FLAP | 12.250 | 20 |
| AB001010406 | 125 | 60 | SINGLE-FLAP | 12.250 | 20 |
| AB001010408 | 125 | 80 | SINGLE-FLAP | 12.250 | 20 |
| AB001010412 | 125 | 120 | SINGLE-FLAP | 12.250 | 20 |
| AB001010424 | 125 | 40 | DOUBLE-FLAP | 12.250 | 20 |
| AB001010426 | 125 | 60 | DOUBLE-FLAP | 12.250 | 20 |
| AB001010504 | 180 | 40 | SINGLE-FLAP | 8.500 | 10 |
| AB001010506 | 180 | 60 | SINGLE-FLAP | 8.500 | 10 |

FIBER GLASS BACKING PAD - Conical Profile



| Article No. | Diameter | Grit | Type | Max RPM | |
|-------------|----------|------|-------------|---------|----|
| AB001020004 | 115 | 40 | SINGLE-FLAP | 13.300 | 20 |
| AB001020006 | 115 | 60 | SINGLE-FLAP | 13.300 | 20 |
| AB001020008 | 115 | 80 | SINGLE-FLAP | 13.300 | 20 |
| AB001020012 | 115 | 120 | SINGLE-FLAP | 13.300 | 20 |
| AB001020104 | 125 | 40 | SINGLE-FLAP | 12.250 | 20 |
| AB001020106 | 125 | 60 | SINGLE-FLAP | 12.250 | 20 |
| AB001020108 | 125 | 80 | SINGLE-FLAP | 12.250 | 20 |
| AB001020112 | 125 | 120 | SINGLE-FLAP | 12.250 | 20 |
| AB001020204 | 180 | 40 | SINGLE-FLAP | 8.500 | 10 |
| AB001020206 | 180 | 60 | SINGLE-FLAP | 8.500 | 10 |



Flap Discs

ZIRCONIA CLOTH Cotton backing pad




APPLICATION

Professional discs featuring more flaps, larger in size, thus granting 35% extra abrasive material on the disc.

For particularly heavy-duty operations on stainless steels.

Also suitable for heavy-duty operations on ferrous and non-ferrous metals.

RECOMMENDED USE



Angle grinder

BIGGER LINE - GLASS FIBER BACKING PAD - Flat Profile



| Article No. | Diameter | Grit | Type | Max RPM | |
|-------------|----------|------|-------------|---------|----|
| AB001010804 | 115 | 40 | SINGLE-FLAP | 13.300 | 20 |
| AB001010806 | 115 | 60 | SINGLE-FLAP | 13.300 | 20 |
| AB001010808 | 115 | 80 | SINGLE-FLAP | 13.300 | 20 |
| AB001010854 | 125 | 40 | SINGLE-FLAP | 12.250 | 20 |
| AB001010856 | 125 | 60 | SINGLE-FLAP | 12.250 | 20 |



Bigger Sheets




Standard Sheets

ZIRCONIA CLOTH Cotton backing pad

APPLICATION

For operations on stainless steels, ferrous and non-ferrous metals.

RECOMMENDED USE



Angle grinder

THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED

NYLON BACKING PAD WITH M14 CONNECTOR - Flat profile



| Article No. | Diameter | Grit | Type | Max RPM | |
|-------------|----------|------|-------------|---------|----|
| AB001030024 | 115 | 40 | DOUBLE-FLAP | 13.300 | 20 |


The conformation of the backing pad with M14 connector allows a quick clamping without locking nut. The ventilation created by the fissures on the backing pad enables a colder working and a lower quantity of grinding dust on the workpiece. Thanks to these tricks, the disc offers higher prestation than the classic double-flap disc.

ALUMINIUM OXIDE CLOTH

Cotton backing pad


APPLICATION

For universal use on ferrous and non-ferrous metals and wood.

RECOMMENDED USE

Angle grinder
NYLON BACKING PAD - Flat Profile


| Article No. | Diameter | Grit | Type | Max RPM | |
|-------------|----------|------|-------------|---------|----|
| AB001110004 | 115 | 40 | SINGLE-FLAP | 13.300 | 20 |
| AB001110006 | 115 | 60 | SINGLE-FLAP | 13.300 | 20 |
| AB001110008 | 115 | 80 | SINGLE-FLAP | 13.300 | 20 |
| AB001110012 | 115 | 120 | SINGLE-FLAP | 13.300 | 20 |
| AB001110024 | 115 | 40 | DOUBLE-FLAP | 13.300 | 20 |
| AB001110026 | 115 | 60 | DOUBLE-FLAP | 13.300 | 20 |
| AB001110028 | 115 | 80 | DOUBLE-FLAP | 13.300 | 20 |
| AB001110032 | 115 | 120 | DOUBLE-FLAP | 13.300 | 20 |
| AB001110104 | 125 | 40 | SINGLE-FLAP | 12.250 | 20 |
| AB001110106 | 125 | 60 | SINGLE-FLAP | 12.250 | 20 |
| AB001110124 | 125 | 40 | DOUBLE-FLAP | 12.250 | 20 |
| AB001110126 | 125 | 60 | DOUBLE-FLAP | 12.250 | 20 |
| AB001110204 | 180 | 40 | SINGLE-FLAP | 8.500 | 10 |
| AB001110206 | 180 | 60 | SINGLE-FLAP | 8.500 | 10 |

Mounted Flap Wheels

ALUMINIUM OXIDE CLOTH




APPLICATION

For particular machining operations on common ferrous and non-ferrous steels.

Particularly suitable for machining operations on materials with irregular and uneven surfaces, or in any case difficult to reach.

RECOMMENDED USE



Drill



Straight grinder

| Article No. | Diameter | Height | Shaft | Grit | Max RPM | |
|-------------|------------|--------|-------|------|---------|----|
| AB001201063 | 10 - MICRO | 10 | 3 | 60 | 40.000 | 25 |
| AB001201563 | 15 - MICRO | 15 | 3 | 60 | 40.000 | 25 |

Micro-wheels particularly suitable for machining operations requiring the highest level of precision.

| Article No. | Diameter | Height | Shaft | Grit | Max RPM | |
|-------------|----------|--------|-------|------|---------|----|
| AB001202146 | 22 | 10 | 6 | 40 | 34.750 | 25 |
| AB001202166 | 22 | 10 | 6 | 60 | 34.750 | 25 |
| AB001202186 | 22 | 10 | 6 | 80 | 34.750 | 25 |
| AB001202196 | 22 | 10 | 6 | 120 | 34.750 | 25 |
| AB001202198 | 22 | 10 | 6 | 220 | 34.750 | 25 |
| AB001202346 | 22 | 20 | 6 | 40 | 34.750 | 25 |
| AB001202366 | 22 | 20 | 6 | 60 | 34.750 | 25 |
| AB001202386 | 22 | 20 | 6 | 80 | 34.750 | 25 |
| AB001202396 | 22 | 20 | 6 | 120 | 34.750 | 25 |
| AB001202398 | 22 | 20 | 6 | 220 | 34.750 | 25 |
| AB001202546 | 25 | 10 | 6 | 40 | 30.500 | 25 |
| AB001202566 | 25 | 10 | 6 | 60 | 30.500 | 25 |
| AB001202586 | 25 | 10 | 6 | 80 | 30.500 | 25 |
| AB001202596 | 25 | 10 | 6 | 120 | 30.500 | 25 |
| AB001202598 | 25 | 10 | 6 | 220 | 30.500 | 25 |
| AB001202746 | 25 | 20 | 6 | 40 | 30.500 | 25 |
| AB001202766 | 25 | 20 | 6 | 60 | 30.500 | 25 |
| AB001202786 | 25 | 20 | 6 | 80 | 30.500 | 25 |
| AB001202796 | 25 | 20 | 6 | 120 | 30.500 | 25 |
| AB001202798 | 25 | 20 | 6 | 220 | 30.500 | 25 |
| AB001203046 | 30 | 10 | 6 | 40 | 25 | 25 |
| AB001203066 | 30 | 10 | 6 | 60 | 25 | 25 |
| AB001203086 | 30 | 10 | 6 | 80 | 25 | 25 |
| AB001203096 | 30 | 10 | 6 | 120 | 25 | 25 |
| AB001203098 | 30 | 10 | 6 | 220 | 25 | 25 |
| AB001203146 | 30 | 15 | 6 | 40 | 25 | 25 |
| AB001203166 | 30 | 15 | 6 | 60 | 25 | 25 |
| AB001203186 | 30 | 15 | 6 | 80 | 25 | 25 |
| AB001203196 | 30 | 15 | 6 | 120 | 25 | 25 |
| AB001203198 | 30 | 15 | 6 | 220 | 25 | 25 |
| AB001203246 | 30 | 20 | 6 | 40 | 25 | 25 |

| Article No. | Diameter | Height | Shaft | Grit | Max RPM | |
|-------------|----------|--------|-------|------|---------|----|
| AB001203266 | 30 | 20 | 6 | 60 | 25.500 | 25 |
| AB001203286 | 30 | 20 | 6 | 80 | 25.500 | 25 |
| AB001203296 | 30 | 20 | 6 | 120 | 25.500 | 25 |
| AB001203298 | 30 | 20 | 6 | 220 | 25.500 | 25 |
| AB001204146 | 40 | 15 | 6 | 40 | 19.100 | 25 |
| AB001204166 | 40 | 15 | 6 | 60 | 19.100 | 25 |
| AB001204186 | 40 | 15 | 6 | 80 | 19.100 | 25 |
| AB001204196 | 40 | 15 | 6 | 120 | 19.100 | 25 |
| AB001204198 | 40 | 15 | 6 | 220 | 19.100 | 25 |
| AB001204246 | 40 | 20 | 6 | 40 | 19.100 | 25 |
| AB001204266 | 40 | 20 | 6 | 60 | 19.100 | 25 |
| AB001204286 | 40 | 20 | 6 | 80 | 19.100 | 25 |
| AB001204296 | 40 | 20 | 6 | 120 | 19.100 | 25 |
| AB001204298 | 40 | 20 | 6 | 220 | 19.100 | 25 |
| AB001204346 | 40 | 30 | 6 | 40 | 19.100 | 25 |
| AB001204366 | 40 | 30 | 6 | 60 | 19.100 | 25 |
| AB001204386 | 40 | 30 | 6 | 80 | 19.100 | 25 |
| AB001204396 | 40 | 30 | 6 | 120 | 19.100 | 25 |
| AB001204398 | 40 | 30 | 6 | 220 | 19.100 | 25 |
| AB001205246 | 50 | 20 | 6 | 40 | 15.300 | 25 |
| AB001205266 | 50 | 20 | 6 | 60 | 15.300 | 25 |
| AB001205286 | 50 | 20 | 6 | 80 | 15.300 | 25 |
| AB001205296 | 50 | 20 | 6 | 120 | 15.300 | 25 |
| AB001205298 | 50 | 20 | 6 | 220 | 15.300 | 25 |
| AB001205346 | 50 | 30 | 6 | 40 | 15.300 | 25 |
| AB001205366 | 50 | 30 | 6 | 60 | 15.300 | 25 |
| AB001205386 | 50 | 30 | 6 | 80 | 15.300 | 25 |
| AB001205396 | 50 | 30 | 6 | 120 | 15.300 | 25 |
| AB001205398 | 50 | 30 | 6 | 220 | 15.300 | 25 |
| AB001206246 | 60 | 20 | 6 | 40 | 12.750 | 25 |
| AB001206266 | 60 | 20 | 6 | 60 | 12.750 | 25 |
| AB001206286 | 60 | 20 | 6 | 80 | 12.750 | 25 |
| AB001206296 | 60 | 20 | 6 | 120 | 12.750 | 25 |
| AB001206298 | 60 | 20 | 6 | 220 | 12.750 | 25 |
| AB001206346 | 60 | 30 | 6 | 40 | 12.750 | 25 |
| AB001206366 | 60 | 30 | 6 | 60 | 12.750 | 25 |
| AB001206386 | 60 | 30 | 6 | 80 | 12.750 | 25 |
| AB001206396 | 60 | 30 | 6 | 120 | 12.750 | 25 |
| AB001206398 | 60 | 30 | 6 | 220 | 12.750 | 25 |
| AB001206446 | 60 | 40 | 6 | 40 | 12.750 | 25 |
| AB001206466 | 60 | 40 | 6 | 60 | 12.750 | 25 |
| AB001206486 | 60 | 40 | 6 | 80 | 12.750 | 25 |
| AB001206496 | 60 | 40 | 6 | 120 | 12.750 | 25 |
| AB001206498 | 60 | 40 | 6 | 220 | 12.750 | 25 |
| AB001208364 | 80 | 30 | 6 | 40 | 9.550 | 25 |
| AB001208366 | 80 | 30 | 6 | 60 | 9.550 | 25 |
| AB001208386 | 80 | 30 | 6 | 80 | 9.550 | 25 |
| AB001208396 | 80 | 30 | 6 | 120 | 9.550 | 25 |
| AB001208398 | 80 | 30 | 6 | 220 | 9.550 | 25 |
| AB001208546 | 80 | 50 | 6 | 40 | 9.550 | 25 |
| AB001208566 | 80 | 50 | 6 | 60 | 9.550 | 25 |
| AB001208586 | 80 | 50 | 6 | 80 | 9.550 | 25 |
| AB001208596 | 80 | 50 | 6 | 120 | 9.550 | 25 |
| AB001208598 | 80 | 50 | 6 | 220 | 9.550 | 25 |



abrabeta.it

The Platinum Discs Line proposes products of unquestionable quality, designed for extremely demanding professional users who only work with the highest quality products for their extremely heavy-duty and most ambitious machining operations.



PLATINUM LINE





Solid Discs for Stainless Steel/Steel

A46U



APPLICATION

Exceptionally high performance discs.

For use on stainless steels, steel alloys and treated and non-treated steels.

High level material removal combined with low disc consumption.
Minimum heating of the disc during machining.
Minimized burr formation.

FEATURES


CUTTING SPEED



SERVICE LIFE



RECOMMENDED USE



Angle grinder


THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED

THINNER CUTTING DISCS - Flat Centre



| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000330115 | 115 | 1,0 | 22,23 | 13300 | 50 |
| AB000330116 | 115 | 1,2 | 22,23 | 13300 | 50 |
| AB000330118 | 115 | 1,6 | 22,23 | 13300 | 50 |
| AB000330125 | 125 | 1,0 | 22,23 | 12200 | 50 |
| AB000330126 | 125 | 1,2 | 22,23 | 12200 | 50 |
| AB000330128 | 125 | 1,6 | 22,23 | 12200 | 50 |
| AB000330150 | 150 | 1,6 | 22,23 | 10200 | 50 |
| AB000330180 | 180 | 2,0 | 22,23 | 8500 | 25 |
| AB000330230 | 230 | 2,0 | 22,23 | 6600 | 25 |

THINNER CUTTING DISCS - Depressed Centre



| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000340230 | 230 | 2,0 | 22,23 | 6600 | 25 |

TWINCUT *Plus*



**MORE CUTS
...LESS TIME!**



Zirconia Solid Discs

ZA46T



APPLICATION

Universal use for cutting steels.

Accurate and concentrated material removal that reduces the power consumption of the power tool.

Minimum heating of the disc.
Minimized burr formation.

FEATURES


CUTTING SPEED



SERVICE LIFE



RECOMMENDED USE



Angle grinder

THINNER CUTTING DISCS FOR STEEL - Flat Centre



| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000100115 | 115 | 1,6 | 22,23 | 13300 | 50 |
| AB000100125 | 125 | 1,6 | 22,23 | 12200 | 50 |

ZA30S



APPLICATION

Universal use for cutting steels and cast irons.

FEATURES


CUTTING SPEED



SERVICE LIFE



RECOMMENDED USE



Angle grinder

CUTTING DISCS FOR STEEL - Depressed Centre



| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000110115 | 115 | 3,2 | 22,23 | 13300 | 50 |
| AB000110125 | 125 | 3,2 | 22,23 | 12200 | 50 |
| AB000110233 | 230 | 3,2 | 22,23 | 6600 | 25 |


ZA24R
APPLICATION


Universal use for deburring steels and cast irons.

FEATURES


MATERIAL REMOVAL RATE



SERVICE LIFE


RECOMMENDED USE

Angle grinder

THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED


GRINDING DISCS FOR STEEL - Depressed Centre

| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000120115 | 115 | 6,5 | 22,23 | 13300 | 50 |
| AB000120125 | 125 | 6,5 | 22,23 | 12200 | 50 |
| AB000120150 | 150 | 6,5 | 22,23 | 10200 | 25 |
| AB000120180 | 180 | 7,0 | 22,23 | 8500 | 20 |
| AB000120236 | 230 | 7,0 | 22,23 | 6600 | 25 |





Zirconia Solid Discs

ZA24P4 SOFT



APPLICATION

For deburring steels, stainless steels and cast irons.

The higher abrasive softness ensures high material removal rate.

FEATURES


MATERIAL REMOVAL RATE



SERVICE LIFE



RECOMMENDED USE



Angle grinder

THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED



GRINDING DISCS FOR STEEL and STAINLESS STEEL - Depressed Centre

| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000121230 | 230 | 7,0 | 22,23 | 6600 | 25 |

ZA24R4 MEDIUM



APPLICATION

For deburring steels and cast irons.

Excellent compromise between cut rate and service life of the disc.

FEATURES


MATERIAL REMOVAL RATE



SERVICE LIFE



RECOMMENDED USE



Angle grinder

THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED



GRINDING DISCS FOR STEEL - Depressed Centre

| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000122230 | 230 | 7,0 | 22,23 | 6600 | 25 |

ZA24S4 STRONG



APPLICATION

For deburring steels and cast irons.

The higher abrasive hardness grants a longer service life of the disc.

FEATURES


MATERIAL REMOVAL RATE



SERVICE LIFE



RECOMMENDED USE



Angle grinder

THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED



GRINDING DISCS FOR STEEL - Depressed Centre

| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000123230 | 230 | 7,0 | 22,23 | 6600 | 25 |



Flap Discs

ZIRCONIA CLOTH Cotton backing pad




APPLICATION

Professional discs that can be used for operations on stainless steels, ferrous and non-ferrous metals.

Coarse grits are suitable for grinding and rough grinding operations, fine grits are particularly suitable for finishing operations.

RECOMMENDED USE



Angle grinder

THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED

NYLON BACKING PAD - Flat Profile

| Article No. | Diameter | Grit | Type | Max RPM | |
|-------------|----------|------|-------------|---------|----|
| AB001050004 | 115 | 40 | SINGLE-FLAP | 13.300 | 20 |
| AB001050006 | 115 | 60 | SINGLE-FLAP | 13.300 | 20 |
| AB001050008 | 115 | 80 | SINGLE-FLAP | 13.300 | 20 |
| AB001050012 | 115 | 120 | SINGLE-FLAP | 13.300 | 20 |
| AB001050024 | 115 | 40 | DOUBLE-FLAP | 13.300 | 20 |
| AB001050026 | 115 | 60 | DOUBLE-FLAP | 13.300 | 20 |
| AB001050028 | 115 | 80 | DOUBLE-FLAP | 13.300 | 20 |
| AB001050032 | 115 | 120 | DOUBLE-FLAP | 13.300 | 20 |
| AB001050104 | 125 | 40 | SINGLE-FLAP | 12.250 | 20 |
| AB001050106 | 125 | 60 | SINGLE-FLAP | 12.250 | 20 |
| AB001050108 | 125 | 80 | SINGLE-FLAP | 12.250 | 20 |
| AB001050124 | 125 | 40 | DOUBLE-FLAP | 12.250 | 20 |
| AB001050126 | 125 | 60 | DOUBLE-FLAP | 12.250 | 20 |
| AB001050128 | 125 | 80 | DOUBLE-FLAP | 12.250 | 20 |
| AB001050204 | 180 | 40 | DOUBLE-FLAP | 8.500 | 10 |
| AB001050206 | 180 | 60 | DOUBLE-FLAP | 8.500 | 10 |



Flap Discs

ZIRCONIA CLOTH Cotton backing pad




APPLICATION

Professional discs that can be used for operations on stainless steels, ferrous and non-ferrous metals.

Coarse grits are suitable for grinding and rough grinding operations, fine grits are particularly suitable for finishing operations.


RECOMMENDED USE



Angle grinder

THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED

FIBER GLASS BACKING PAD - Flat Profile



| Article No. | Diameter | Grit | Type | Max RPM | |
|-------------|----------|------|-------------|---------|----|
| AB001050304 | 115 | 40 | SINGLE-FLAP | 13.300 | 20 |
| AB001050306 | 115 | 60 | SINGLE-FLAP | 13.300 | 20 |
| AB001050308 | 115 | 80 | SINGLE-FLAP | 13.300 | 20 |
| AB001050312 | 115 | 120 | SINGLE-FLAP | 13.300 | 20 |
| AB001050324 | 115 | 40 | DOUBLE-FLAP | 13.300 | 20 |
| AB001050326 | 115 | 60 | DOUBLE-FLAP | 13.300 | 20 |
| AB001050404 | 125 | 40 | SINGLE-FLAP | 12.250 | 20 |
| AB001050406 | 125 | 60 | SINGLE-FLAP | 12.250 | 20 |
| AB001050408 | 125 | 80 | SINGLE-FLAP | 12.250 | 20 |
| AB001050412 | 125 | 120 | SINGLE-FLAP | 12.250 | 20 |
| AB001050424 | 125 | 40 | DOUBLE-FLAP | 12.250 | 20 |
| AB001050426 | 125 | 60 | DOUBLE-FLAP | 12.250 | 20 |
| AB001050504 | 180 | 40 | SINGLE-FLAP | 8.500 | 10 |
| AB001050506 | 180 | 60 | SINGLE-FLAP | 8.500 | 10 |

FIBER GLASS BACKING PAD - Conical Profile



| Article No. | Diameter | Grit | Type | Max RPM | |
|-------------|----------|------|-------------|---------|----|
| AB001060004 | 115 | 40 | SINGLE-FLAP | 13.300 | 20 |
| AB001060006 | 115 | 60 | SINGLE-FLAP | 13.300 | 20 |
| AB001060008 | 115 | 80 | SINGLE-FLAP | 13.300 | 20 |
| AB001060012 | 115 | 120 | SINGLE-FLAP | 13.300 | 20 |
| AB001060104 | 125 | 40 | SINGLE-FLAP | 12.250 | 20 |
| AB001060106 | 125 | 60 | SINGLE-FLAP | 12.250 | 20 |
| AB001060108 | 125 | 80 | SINGLE-FLAP | 12.250 | 20 |
| AB001060112 | 125 | 120 | SINGLE-FLAP | 12.250 | 20 |
| AB001060124 | 125 | 40 | DOUBLE-FLAP | 12.250 | 20 |
| AB001060126 | 125 | 60 | DOUBLE-FLAP | 12.250 | 20 |
| AB001060128 | 125 | 80 | DOUBLE-FLAP | 12.250 | 20 |
| AB001060204 | 180 | 40 | SINGLE-FLAP | 8.500 | 10 |
| AB001060206 | 180 | 60 | SINGLE-FLAP | 8.500 | 10 |

ZIRCONIA CLOTH Cotton backing pad




APPLICATION

Professional discs that can be used for heavy-duty operations on stainless steels, ferrous and non-ferrous metals.

The reinforced backing pad and the large size sheets bestow exceptional pressure resistance to the disc in use and a very high cut rate.

RECOMMENDED USE



Angle grinder

THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED

REINFORCED NYLON BACKING PAD - Flat Profile

| Article No. | Diameter | Grit | Type | Max RPM | Box |
|-------------|----------|------|-------------|---------|-----|
| AB001070304 | 115* | 40 | SINGLE-FLAP | 20 | 20 |
| AB001070306 | 115* | 60 | SINGLE-FLAP | 20 | 20 |
| AB001070308 | 115* | 80 | SINGLE-FLAP | 20 | 20 |
| AB001070324 | 115* | 40 | DOUBLE-FLAP | 20 | 20 |
| AB001070326 | 115* | 60 | DOUBLE-FLAP | 20 | 20 |
| AB001070328 | 115* | 80 | DOUBLE-FLAP | 20 | 20 |

*Clamping the counter flange to the disc is recommended. Each package contains a counter flange included in the price.

COUNTER FLANGE

| Article No. | Diameter | Box |
|-------------|----------|-----|
| AB001070999 | 22,23 | 5 |

Positioning of the counterflange on the disc



Reinforced backing pad "Real Flat" perfectly flat



80 large size sheets, which bestow an extra **35%** of abrasive material to the disc compared to a traditional disc.



Flap Discs

ALUMINIUM OXIDE CLOTH


Cotton backing pad



APPLICATION

For universal use on ferrous and non-ferrous metals and wood.

RECOMMENDED USE



Angle grinder

**THE USE OF HIGH POWER GRINDERS
IS STRONGLY RECOMMENDED**

GLASS FIBER BACKING PAD - Flat Profile



| Article No. | Diameter | Grit | Type | Max RPM | |
|-------------|----------|------|-------------|---------|----|
| AB001120004 | 115 | 40 | SINGLE-FLAP | 20 | 20 |
| AB001120006 | 115 | 60 | SINGLE-FLAP | 20 | 20 |
| AB001120008 | 115 | 80 | SINGLE-FLAP | 20 | 20 |
| AB001120012 | 115 | 120 | SINGLE-FLAP | 20 | 20 |
| AB001120024 | 115 | 40 | DOUBLE-FLAP | 20 | 20 |
| AB001120026 | 115 | 60 | DOUBLE-FLAP | 20 | 20 |
| AB001120104 | 125 | 40 | SINGLE-FLAP | 20 | 20 |
| AB001120106 | 125 | 60 | SINGLE-FLAP | 20 | 20 |

**They guarantee a higher quality machining on all surfaces,
therefore Aluminium Oxide is the best abrasive.**

Mounted Flap Wheels

ZIRCONIA CLOTH




APPLICATION


For particular machining operations on common ferrous and non-ferrous steels. Also suitable for operations on stainless steels.

Particularly suitable for machining operations on materials with irregular and uneven surfaces, or in any case difficult to reach.

RECOMMENDED USE



Drill




Straight grinder

| Article No. | Diameter | Height | Shaft | Grit | Max RPM | |
|-------------|----------|--------|-------|------|---------|----|
| AB001213046 | 30 | 10 | 6 | 40 | 25.500 | 25 |
| AB001213066 | 30 | 10 | 6 | 60 | 25.500 | 25 |
| AB001213086 | 30 | 10 | 6 | 80 | 25.500 | 25 |
| AB001213246 | 30 | 20 | 6 | 40 | 25.500 | 25 |
| AB001213266 | 30 | 20 | 6 | 60 | 25.500 | 25 |
| AB001213286 | 30 | 20 | 6 | 80 | 25.500 | 25 |
| AB001214246 | 40 | 20 | 6 | 40 | 19.100 | 25 |
| AB001214266 | 40 | 20 | 6 | 60 | 19.100 | 25 |
| AB001214286 | 40 | 20 | 6 | 80 | 19.100 | 25 |
| AB001214346 | 40 | 30 | 6 | 40 | 19.100 | 25 |
| AB001214366 | 40 | 30 | 6 | 60 | 19.100 | 25 |
| AB001214386 | 40 | 30 | 6 | 80 | 19.100 | 25 |
| AB001215246 | 50 | 20 | 6 | 40 | 15.300 | 25 |
| AB001215266 | 50 | 20 | 6 | 60 | 15.300 | 25 |
| AB001215286 | 50 | 20 | 6 | 80 | 15.300 | 25 |
| AB001215346 | 50 | 30 | 6 | 40 | 15.300 | 25 |
| AB001215366 | 50 | 30 | 6 | 60 | 15.300 | 25 |
| AB001215386 | 50 | 30 | 6 | 80 | 15.300 | 25 |
| AB001216346 | 60 | 30 | 6 | 40 | 12.750 | 25 |
| AB001216366 | 60 | 30 | 6 | 60 | 12.750 | 25 |
| AB001216386 | 60 | 30 | 6 | 80 | 12.750 | 25 |
| AB001218346 | 80 | 30 | 6 | 40 | 9.550 | 25 |
| AB001218366 | 80 | 30 | 6 | 60 | 9.550 | 25 |
| AB001218386 | 80 | 30 | 6 | 80 | 9.550 | 25 |

Particularly suitable for heavier heavy-duty machining operations on stainless steels and common ferrous and non-ferrous steels.



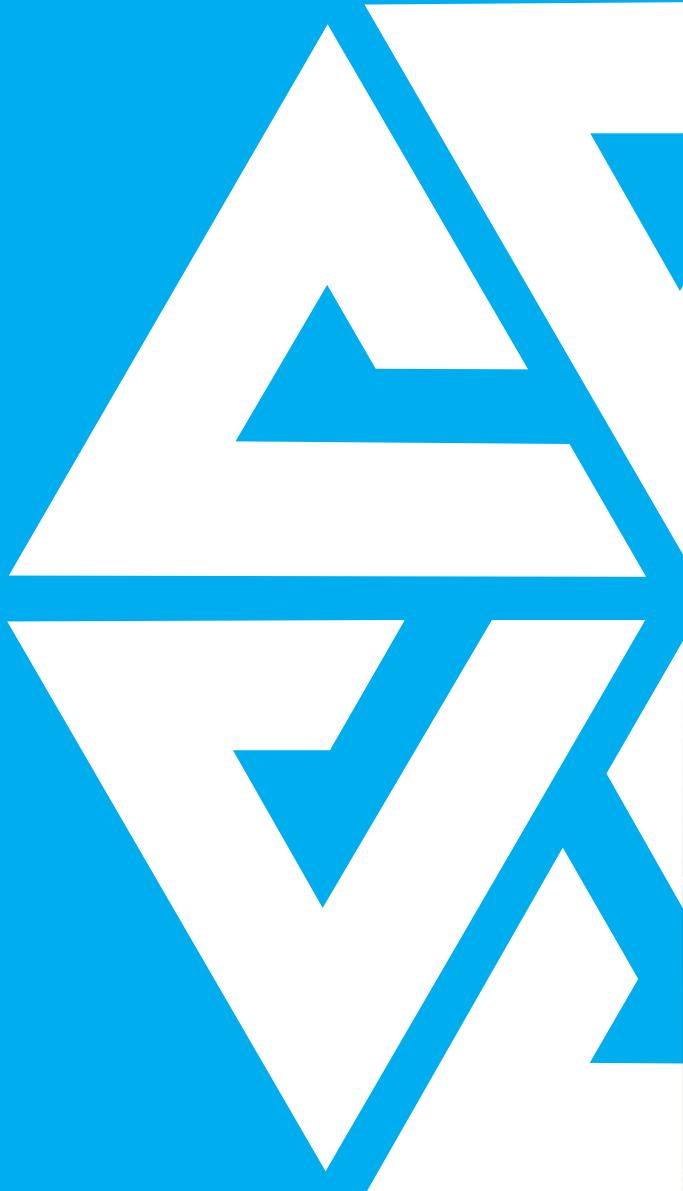abrabetait



The Diamond Discs Line
offers a varied selection of ultra-
professional products designed
for special machining operations
that require the use of superior
quality specific products.



DIAMOND LINE





Solid Discs for Aluminium

A3ON



APPLICATION

For cutting aluminium, brass and bronze.

The abrasive lubrication prevents clogging during machining.

FEATURES


CUTTING SPEED



SERVICE LIFE



RECOMMENDED USE



Angle grinder

THINNER CUTTING DISCS - Flat Centre



| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000400112 | 115 | 1,2 | 22,23 | 13300 | 50 |
| AB000400115 | 115 | 1,6 | 22,23 | 13300 | 50 |
| AB000400125 | 125 | 1,6 | 22,23 | 12200 | 50 |
| AB000400230 | 230 | 2,0 | 22,23 | 6600 | 25 |

THINNER CUTTING DISCS - Depressed Centre



| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000410230 | 230 | 2,0 | 22,23 | 6600 | 25 |

CUTTING DISCS - Depressed Centre



| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000450117 | 115 | 3,2 | 22,23 | 13300 | 50 |
| AB000450125 | 125 | 2,5 | 22,23 | 12200 | 50 |
| AB000450230 | 230 | 2,5 | 22,23 | 6600 | 25 |
| AB000450233 | 230 | 3,2 | 22,23 | 6600 | 25 |

| A30N | APPLICATION | FEATURES | RECOMMENDED USE |
|------|---|---|-----------------------------|
| | <p>APPLICATION</p> <p>For deburring aluminium, brass and bronze.</p> <p>The abrasive lubrication prevents clogging during machining.</p> | <p>FEATURES</p> <p>MATERIAL REMOVAL RATE ■ ■ ■ ■ ■</p> <p>SERVICE LIFE ■ ■ ■ ■ ■</p> | <p>Angle grinder</p> |

GRINDING DISCS - Depressed Centre

| Article No. | Diameter | Thickness | Bore | Max RPM | |
|-------------|----------|-----------|-------|---------|----|
| AB000460115 | 115 | 6,5 | 22,23 | 13300 | 50 |
| AB000460125 | 125 | 6,5 | 22,23 | 12200 | 50 |
| AB000460230 | 230 | 6,5 | 22,23 | 6600 | 25 |



Flap Discs

ZIRCONIA CLOTH Cotton backing pad




APPLICATION

Professional discs that can be used for operations on stainless steels, ferrous and non-ferrous metals.

Recommended for machining operations on shaped and angle surfaces.


The greater flexibility of the "Soft" sheets allows a lower overheating of the Disc and assures a lower aggressiveness compared to the traditional disc.

RECOMMENDED USE




Angle grinder

SOFT LINE - GLASS FIBER BACKING PAD - Flat Profile



| Article No. | Diameter | Grit | Type | Max RPM | |
|-------------|----------|------|-------------|---------|----|
| AB001080004 | 115 | 40 | SINGLE-FLAP | 10.500 | 20 |
| AB001080006 | 115 | 60 | SINGLE-FLAP | 10.500 | 20 |
| AB001080008 | 115 | 80 | SINGLE-FLAP | 10.500 | 20 |
| AB001080104 | 125 | 40 | SINGLE-FLAP | 9.650 | 20 |
| AB001080106 | 125 | 60 | SINGLE-FLAP | 9.650 | 20 |
| AB001080108 | 125 | 80 | SINGLE-FLAP | 9.650 | 20 |

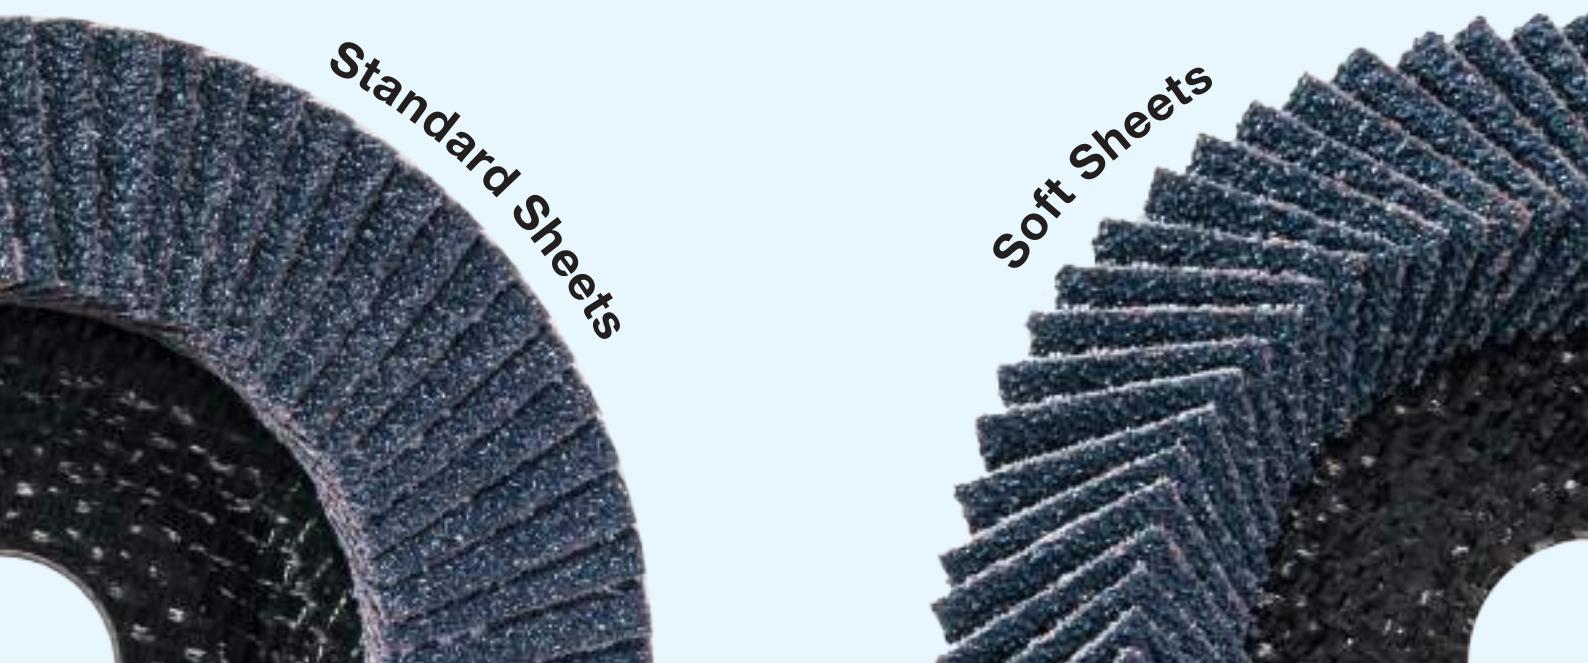The specific arrangement of the sheets in flex Zirconia Cloth allows the Soft flap discs to perform precise and targeted operations on work surfaces otherwise difficult to reach.



CERAMIC ABRASIVE CLOTH
 Polyester backing pad


APPLICATION

Professional discs that can be used for operations on stainless steels, ferrous and non-ferrous metals.

Recommended for machining operations on shaped and angle surfaces.


The greater flexibility of the "Soft" sheets allows a lower overheating of the Disc and assures a lower aggressiveness compared to the traditional disc.

Cloth treated with grinding active additive to avoid overheating of the work surface.

RECOMMENDED USE


Angle grinder

THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED

SOFT LINE - GLASS FIBER BACKING PAD - Flat Profile


| Article No. | Diameter | Grit | Type | Max RPM | |
|-------------|----------|------|-------------|---------|----|
| AB001080504 | 115 | 40 | SINGLE-FLAP | 20 | 20 |
| AB001080506 | 115 | 60 | SINGLE-FLAP | 20 | 20 |
| AB001080604 | 125 | 40 | SINGLE-FLAP | 20 | 20 |
| AB001080606 | 125 | 60 | SINGLE-FLAP | 20 | 20 |

The specific arrangement of the sheets in flex ceramic abrasive cloth allows the Soft flap discs to perform precise and targeted operations on work surfaces otherwise difficult to reach.





Flap Discs

ZIRCONIA CLOTH Polycotton backing pad




APPLICATION

Professional discs featuring more flaps, larger in size, thus granting 35% extra abrasive material on the disc.

For particularly heavy-duty operations on stainless steels.

Also suitable for heavy-duty operations on ferrous and non-ferrous metals.

RECOMMENDED USE



Angle grinder

THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED

BIGGER LINE - GLASS FIBER BACKING PAD - Flat Profile

| Article No. | Diameter | Grit | Type | Max RPM | |
|-------------|----------|------|-------------|---------|----|
| AB001090004 | 115 | 40 | SINGLE-FLAP | 10.500 | 20 |
| AB001090006 | 115 | 60 | SINGLE-FLAP | 10.500 | 20 |
| AB001090104 | 125 | 40 | SINGLE-FLAP | 9.650 | 20 |
| AB001090106 | 125 | 60 | SINGLE-FLAP | 9.650 | 20 |
| AB001090204 | 180 | 40 | SINGLE-FLAP | 6.700 | 10 |
| AB001090206 | 180 | 60 | SINGLE-FLAP | 6.700 | 10 |



BIGGER LINE - GLASS FIBER BACKING PAD - Conical Profile

| Article No. | Diameter | Grit | Type | Max RPM | |
|-------------|----------|------|-------------|---------|----|
| AB001090304 | 115 | 40 | SINGLE-FLAP | 10.500 | 20 |
| AB001090306 | 115 | 60 | SINGLE-FLAP | 10.500 | 20 |
| AB001090404 | 125 | 40 | SINGLE-FLAP | 9.650 | 20 |
| AB001090406 | 125 | 60 | SINGLE-FLAP | 9.650 | 20 |



Bigger Sheets



Standard Sheets

CERAMIC-ZIRCONIA CLOTH

Polycotton backing pad




APPLICATION

Professional discs for heavy-duty operations for the removal of burrs and weld seams on hard metals and stainless steels.

Suitable to withstand a high pressure on the work surface.

Cloth treated with grinding active additive to avoid overheating of the work surface.

RECOMMENDED USE



Angle grinder

THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED

NYLON BACKING PAD - Flat Profile

| Article No. | Diameter | Grit | Type | Max RPM | |
|-------------|----------|------|-------------|---------|----|
| AB001140004 | 115 | 40 | SINGLE-FLAP | 10.500 | 20 |
| AB001140006 | 115 | 60 | SINGLE-FLAP | 10.500 | 20 |
| AB001140104 | 125 | 40 | SINGLE-FLAP | 9.650 | 20 |
| AB001140106 | 125 | 60 | SINGLE-FLAP | 9.650 | 20 |

CERAMIC-ZIRCONIA CLOTH

Polycotton backing pad




APPLICATION

Professional discs for heavy-duty operations for the removal of burrs and weld seams on hard metals and stainless steels.

Suitable to withstand a high pressure on the work surface.

Cloth treated with grinding active additive to avoid overheating of the work surface.

RECOMMENDED USE



Angle grinder

THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED

GLASS FIBER BACKING PAD - Flat Profile

| Article No. | Diameter | Grit | Type | Max RPM | |
|-------------|----------|------|-------------|---------|----|
| AB001141004 | 115 | 40 | SINGLE-FLAP | 10.500 | 20 |
| AB001141006 | 115 | 60 | SINGLE-FLAP | 10.500 | 20 |
| AB001141104 | 125 | 40 | SINGLE-FLAP | 9.650 | 20 |
| AB001141106 | 125 | 60 | SINGLE-FLAP | 9.650 | 20 |

CERAMIC ABRASIVE CLOTH

Polyester backing pad




APPLICATION

Professional discs for heavy-duty operations for the removal of burrs and weld seams on hardest metals.

Suitable to withstand an extremely high pressure on the work surface.


Cloth treated with grinding active additive to avoid overheating of the work surface.

RECOMMENDED USE



Angle grinder

THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED



NYLON BACKING PAD - Flat Profile

| Article No. | Diameter | Grit | Type | Max RPM | |
|-------------|----------|------|-------------|---------|----|
| AB001150004 | 115 | 40 | SINGLE-FLAP | 10.500 | 20 |
| AB001150006 | 115 | 60 | SINGLE-FLAP | 10.500 | 20 |
| AB001150104 | 125 | 40 | SINGLE-FLAP | 9.650 | 20 |
| AB001150106 | 125 | 60 | SINGLE-FLAP | 9.650 | 20 |

CERAMIC ABRASIVE CLOTH

Polyester backing pad




APPLICATION

Professional discs for heavy-duty operations for the removal of burrs and weld seams on hardest metals.

Suitable to withstand an extremely high pressure on the work surface.


Cloth treated with grinding active additive to avoid overheating of the work surface.

RECOMMENDED USE



Angle grinder

THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED



GLASS FIBER BACKING PAD - Flat Profile

| Article No. | Diameter | Grit | Type | Max RPM | |
|-------------|----------|------|-------------|---------|----|
| AB001151004 | 115 | 40 | SINGLE-FLAP | 10.500 | 20 |
| AB001151006 | 115 | 60 | SINGLE-FLAP | 10.500 | 20 |
| AB001151104 | 125 | 40 | SINGLE-FLAP | 9.650 | 20 |
| AB001151106 | 125 | 60 | SINGLE-FLAP | 9.650 | 20 |

GLASS FIBER BACKING PAD - Conical Profile



| Article No. | Diameter | Grit | Type | Max RPM | |
|-------------|----------|------|-------------|---------|----|
| AB001152004 | 115 | 40 | SINGLE-FLAP | 10.500 | 20 |
| AB001152006 | 115 | 60 | SINGLE-FLAP | 10.500 | 20 |
| AB001152104 | 125 | 40 | SINGLE-FLAP | 9.650 | 20 |
| AB001152106 | 125 | 60 | SINGLE-FLAP | 9.650 | 20 |

CERAMIC ABRASIVE CLOTH

Polyester backing pad




APPLICATION

Professional disc that can be used for heavy-duty operations in which high material removal and long lasting machining are requested. The best results are obtained on heat sensitive materials like stainless steels, titanium and inconel.

Also suitable for ferrous and non-ferrous metals.

Cloth treated with grinding active additive to avoid overheating of the work surface.

RECOMMENDED USE



Angle grinder

THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED

NYLON BACKING PAD WITH M14 CONNECTOR - Flat Profile

| Article No. | Diameter | Grit | Type | Max RPM | |
|-------------|----------|------|-------------|---------|----|
| AB001130001 | 115 | 40 | DOUBLE-FLAP | 10.500 | 20 |

The conformation of the backing pad with M14 connector allows a quick clamping without locking nut. The ventilation created by the fissures on the backing pad enables a colder working and a lower quantity of grinding dust on the workpiece. The disc with the ceramic-cloth, in addition to the backing pad M14 is at the top of our line in terms of removing and service life.

The Abra Beta Ceramic Abrasive flap discs are the highest quality level products of our range.

The top quality materials and the high skills used in manufacturing make these discs ideal to fully satisfy the most demanding professionals.





Flap Discs

STEARATE ALUMINIUM OXIDE CLOTH Polyester backing pad




APPLICATION

For operations on aluminium, brass, copper, bronze, galvanized materials and fiberglass

The treatment of the aluminium oxide cloth with stearate prevents problems of disc clogging and ensures a better discharge of machining waste.

Cloth treated with grinding active additive to avoid overheating of the work surface.

RECOMMENDED USE



Angle grinder


THE USE OF HIGH POWER GRINDERS IS STRONGLY RECOMMENDED

GLASS FIBER BACKING PAD - Flat Profile



| Article No. | Diameter | Grit | Type | Max RPM | |
|-------------|----------|------|-------------|---------|----|
| AB001160004 | 115 | 40 | SINGLE-FLAP | 10.500 | 20 |
| AB001160006 | 115 | 60 | SINGLE-FLAP | 10.500 | 20 |
| AB001160104 | 125 | 40 | SINGLE-FLAP | 9.650 | 20 |
| AB001160106 | 125 | 60 | SINGLE-FLAP | 9.650 | 20 |

GLASS FIBER BACKING PAD - Conical Profile



| Article No. | Diameter | Grit | Type | Max RPM | |
|-------------|----------|------|-------------|---------|----|
| AB001161004 | 115 | 40 | SINGLE-FLAP | 10.500 | 20 |
| AB001161006 | 115 | 60 | SINGLE-FLAP | 10.500 | 20 |
| AB001161104 | 125 | 40 | SINGLE-FLAP | 9.650 | 20 |
| AB001161106 | 125 | 60 | SINGLE-FLAP | 9.650 | 20 |

Mounted Flap Wheels

CERAMIC-ABRASIVE CLOTH




APPLICATION

For particular machining operations on common ferrous and non-ferrous steels and stainless steels.


Particularly suitable for machining operations on materials with irregular and uneven surfaces, or in any case difficult to reach.

Cloth treated with grinding active additive to avoid overheating of the work surface.

RECOMMENDED USE



Drill



Straight grinder

THE USE OF HIGH POWER TOOLS IS STRONGLY RECOMMENDED

| Article No. | Diameter | Height | Shaft | Grit | Max RPM | |
|-------------|----------|--------|-------|------|---------|----|
| AB001223246 | 30 | 20 | 6 | 40 | 25.500 | 25 |
| AB001223266 | 30 | 20 | 6 | 60 | 25.500 | 25 |
| AB001224346 | 40 | 30 | 6 | 40 | 19.100 | 25 |
| AB001224366 | 40 | 30 | 6 | 60 | 19.100 | 25 |
| AB001225346 | 50 | 30 | 6 | 40 | 15.300 | 25 |
| AB001225366 | 50 | 30 | 6 | 60 | 15.300 | 25 |
| AB001226346 | 60 | 30 | 6 | 40 | 12.750 | 25 |
| AB001226366 | 60 | 30 | 6 | 60 | 12.750 | 25 |
| AB001228346 | 80 | 30 | 6 | 40 | 9.550 | 25 |
| AB001228366 | 80 | 30 | 6 | 60 | 9.550 | 25 |

Particularly suitable for extremely heavy-duty machining operations on stainless steels and common ferrous and non-ferrous steels. The higher rigidity of the cloth ensures excellent resistance to friction of the work piece.

abrabetait





**WHEELS
WITH BORE**



Threaded Bore Flap Wheels

STANDARD SHEETS ALUMINIUM OXIDE CLOTH




APPLICATION


For smoothing, finishing and cleaning operations on metal and stainless steel surfaces.

Also suitable for smoothing operations on wood surfaces and cleaning operations on plastic surfaces.

RECOMMENDED USE



Bench grinder



Straight grinder


| Article No. | Diameter | Height | Bore | Grit | Max RPM | |
|-------------|----------|--------|------|------|---------|---|
| AB001300004 | 165 | 30 | 54 | 40 | 5.200 | 3 |
| AB001300006 | 165 | 30 | 54 | 60 | 5.200 | 3 |
| AB001300008 | 165 | 30 | 54 | 80 | 5.200 | 3 |
| AB001300012 | 165 | 30 | 54 | 120 | 5.200 | 3 |
| AB001300018 | 165 | 30 | 54 | 180 | 5.200 | 3 |
| AB001300022 | 165 | 30 | 54 | 220 | 5.200 | 3 |
| AB001300104 | 165 | 50 | 54 | 40 | 5.200 | 2 |
| AB001300106 | 165 | 50 | 54 | 60 | 5.200 | 2 |
| AB001300108 | 165 | 50 | 54 | 80 | 5.200 | 2 |
| AB001300112 | 165 | 50 | 54 | 120 | 5.200 | 2 |
| AB001300118 | 165 | 50 | 54 | 180 | 5.200 | 2 |
| AB001300122 | 165 | 50 | 54 | 220 | 5.200 | 2 |
| AB001300204 | 200 | 30 | 54 | 40 | 4.300 | 3 |
| AB001300206 | 200 | 30 | 54 | 60 | 4.300 | 3 |
| AB001300208 | 200 | 30 | 54 | 80 | 4.300 | 3 |
| AB001300212 | 200 | 30 | 54 | 120 | 4.300 | 3 |
| AB001300218 | 200 | 30 | 54 | 180 | 4.300 | 3 |
| AB001300304 | 200 | 50 | 54 | 40 | 4.300 | 2 |
| AB001300306 | 200 | 50 | 54 | 60 | 4.300 | 2 |
| AB001300308 | 200 | 50 | 54 | 80 | 4.300 | 2 |
| AB001300312 | 200 | 50 | 54 | 120 | 4.300 | 2 |
| AB001300318 | 200 | 50 | 54 | 180 | 4.300 | 2 |
| AB001300322 | 200 | 50 | 54 | 220 | 4.300 | 2 |
| AB001300404 | 250 | 30 | 100 | 40 | 3.400 | 3 |
| AB001300406 | 250 | 30 | 100 | 60 | 3.400 | 3 |
| AB001300408 | 250 | 30 | 100 | 80 | 3.400 | 3 |
| AB001300412 | 250 | 30 | 100 | 120 | 3.400 | 3 |
| AB001300504 | 250 | 50 | 100 | 40 | 3.400 | 2 |
| AB001300506 | 250 | 50 | 100 | 60 | 3.400 | 2 |
| AB001300508 | 250 | 50 | 100 | 80 | 3.400 | 2 |
| AB001300512 | 250 | 50 | 100 | 120 | 3.400 | 2 |
| AB001300518 | 250 | 50 | 100 | 180 | 3.400 | 2 |
| AB001300522 | 250 | 50 | 100 | 220 | 3.400 | 2 |
| AB001300604 | 300 | 50 | 100 | 40 | 2.850 | 2 |
| AB001300606 | 300 | 50 | 100 | 60 | 2.850 | 2 |
| AB001300608 | 300 | 50 | 100 | 80 | 2.850 | 2 |

**SLOTTED SHEETS
ALUMINIUM OXIDE CLOTH**


APPLICATION

For gentle smoothing, finishing and cleaning operations on metal and stainless steel surfaces.

Also suitable for smoothing operations on wood surfaces and cleaning operations on plastic surfaces.

RECOMMENDED USE


Bench grinder



Straight grinder

| Article No. | Diameter | Height | Bore | Grit | Max RPM | |
|-------------|----------|--------|------|------|---------|---|
| AB001310006 | 165 | 30 | 54 | 60 | 5.200 | 3 |
| AB001310008 | 165 | 30 | 54 | 80 | 5.200 | 3 |
| AB001310106 | 165 | 50 | 54 | 60 | 5.200 | 2 |
| AB001310108 | 165 | 50 | 54 | 80 | 5.200 | 2 |
| AB001310206 | 200 | 30 | 54 | 60 | 4.300 | 3 |
| AB001310208 | 200 | 30 | 54 | 80 | 4.300 | 3 |
| AB001310306 | 200 | 50 | 54 | 60 | 4.300 | 2 |
| AB001310308 | 200 | 50 | 54 | 80 | 4.300 | 2 |
| AB001310406 | 250 | 30 | 100 | 60 | 3.400 | 3 |
| AB001310408 | 250 | 30 | 100 | 80 | 3.400 | 3 |
| AB001310506 | 250 | 50 | 100 | 60 | 3.400 | 2 |
| AB001310508 | 250 | 50 | 100 | 80 | 3.400 | 2 |
| AB001310606 | 300 | 50 | 100 | 60 | 2.850 | 2 |
| AB001310608 | 300 | 50 | 100 | 80 | 2.850 | 2 |

**Particularly suitable for irregular or shaped surfaces.
They guarantee uniform machining even in case of multiple assemblies.**





Wheels with M14 Threaded Bore

ALUMINIUM OXIDE CLOTH THREADED BORE M14




APPLICATION

For smoothing, finishing and cleaning operations on metal, stainless steel, aluminium, copper and bronze surfaces.

The reduced thickness of the wheels allows to reach all work surfaces.

The M14 threaded bore allows the use of the part on angle grinders.

RECOMMENDED USE



Angle grinder

| Article No. | Diameter | Height | Bore | Grit | Max RPM | |
|-------------|----------|--------|------|------|---------|----|
| AB001331204 | 125 | 20 | M-14 | 40 | 12.000 | 10 |
| AB001331206 | 125 | 20 | M-14 | 60 | 12.000 | 10 |
| AB001331208 | 125 | 20 | M-14 | 80 | 12.000 | 10 |
| AB001331212 | 125 | 20 | M-14 | 120 | 12.000 | 10 |
| AB001331224 | 125 | 20 | M-14 | 240 | 12.000 | 10 |

Satinex Wheels

ALUMINIUM OXIDE CLOTH



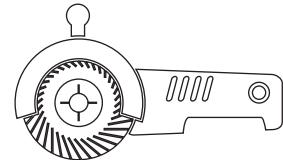
APPLICATION

For operations on ferrous and non-ferrous metals.

Coarse grits are suitable for heavier satin finish operations.

Fine grits are suitable for more gentle finishing operations.

RECOMMENDED USE



Angle satin finishing machine

| Article No. | Diameter | Height | Bore | Grit | Max RPM | |
|-------------|----------|--------|------|------|---------|---|
| AB001351104 | 100 | 100 | 19 | 40 | 5.700 | 4 |
| AB001351106 | 100 | 100 | 19 | 60 | 5.700 | 4 |
| AB001351108 | 100 | 100 | 19 | 80 | 5.700 | 4 |
| AB001351112 | 100 | 100 | 19 | 120 | 5.700 | 4 |
| AB001351124 | 100 | 100 | 19 | 240 | 5.700 | 4 |

ZIRCONIA CLOTH



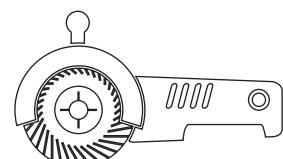
APPLICATION

For operations on ferrous and non-ferrous metals.

Coarse grits are suitable for heavier satin finish operations.

Fine grits are suitable for more gentle finishing operations.

RECOMMENDED USE



Angle satin finishing machine

| Article No. | Diameter | Height | Bore | Grit | Max RPM | |
|-------------|----------|--------|------|------|---------|---|
| AB001361104 | 100 | 100 | 19 | 40 | 5.700 | 4 |
| AB001361106 | 100 | 100 | 19 | 60 | 5.700 | 4 |

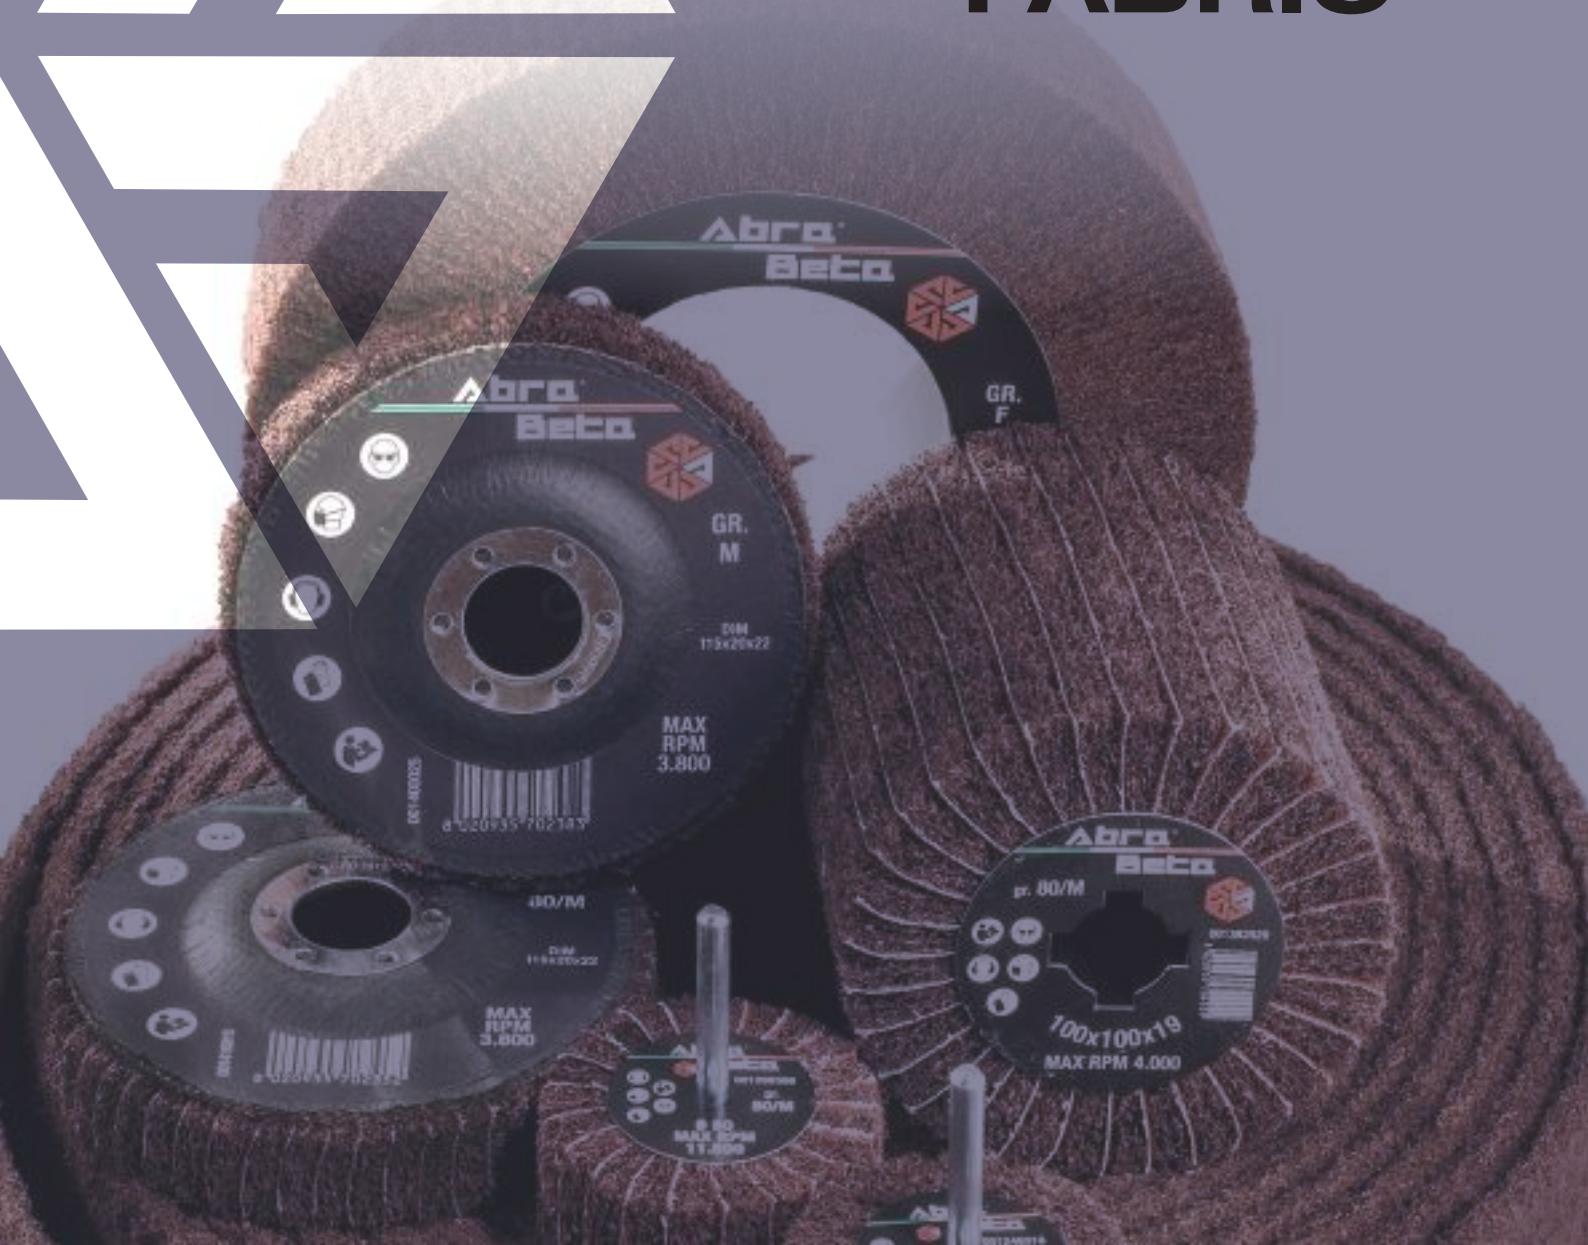
Particularly suitable for heavier heavy-duty operations on stainless steels, steels, ferrous and non-ferrous metals.

abrabetait





NON-WOVEN FABRIC





Mounted Wheels

NON-WOVEN FABRIC SHEETS




APPLICATION


For grinding, satin finish and cleaning operations on common ferrous and non-ferrous steel alloys and stainless steels.

Particularly suitable for machining operations on materials with irregular and uneven surfaces, or in any case difficult to reach.

RECOMMENDED USE



Drill



Straight grinder



| Article No. | Diameter | Height | Shaft | Grit | |
|-------------|----------|--------|-------|-----------|----|
| AB001243206 | 30 | 20 | 6 | COARSE | 25 |
| AB001243216 | 30 | 20 | 6 | MEDIUM | 25 |
| AB001243226 | 30 | 20 | 6 | FINE | 25 |
| AB001243236 | 30 | 20 | 6 | VERY FINE | 25 |
| AB001243306 | 30 | 30 | 6 | COARSE | 25 |
| AB001243316 | 30 | 30 | 6 | MEDIUM | 25 |
| AB001243326 | 30 | 30 | 6 | FINE | 25 |
| AB001243336 | 30 | 30 | 6 | VERY FINE | 25 |
| AB001244206 | 40 | 20 | 6 | COARSE | 25 |
| AB001244216 | 40 | 20 | 6 | MEDIUM | 25 |
| AB001244226 | 40 | 20 | 6 | FINE | 25 |
| AB001244236 | 40 | 20 | 6 | VERY FINE | 25 |
| AB001244306 | 40 | 30 | 6 | COARSE | 25 |
| AB001244316 | 40 | 30 | 6 | MEDIUM | 25 |
| AB001244326 | 40 | 30 | 6 | FINE | 25 |
| AB001244436 | 40 | 30 | 6 | VERY FINE | 25 |
| AB001245306 | 50 | 30 | 6 | COARSE | 25 |
| AB001245316 | 50 | 30 | 6 | MEDIUM | 25 |
| AB001245326 | 50 | 30 | 6 | FINE | 25 |
| AB001245336 | 50 | 30 | 6 | VERY FINE | 25 |
| AB001246306 | 60 | 30 | 6 | COARSE | 25 |
| AB001246316 | 60 | 30 | 6 | MEDIUM | 25 |
| AB001246326 | 60 | 30 | 6 | FINE | 25 |
| AB001246336 | 60 | 30 | 6 | VERY FINE | 25 |
| AB001246506 | 60 | 50 | 6 | COARSE | 25 |
| AB001246516 | 60 | 50 | 6 | MEDIUM | 25 |
| AB001246526 | 60 | 50 | 6 | FINE | 25 |
| AB001246536 | 60 | 50 | 6 | VERY FINE | 25 |
| AB001248306 | 80 | 30 | 6 | COARSE | 25 |
| AB001248316 | 80 | 30 | 6 | MEDIUM | 25 |
| AB001248326 | 80 | 30 | 6 | FINE | 25 |
| AB001248336 | 80 | 30 | 6 | VERY FINE | 25 |
| AB001248506 | 80 | 50 | 6 | COARSE | 25 |
| AB001248516 | 80 | 50 | 6 | MEDIUM | 25 |
| AB001248526 | 80 | 50 | 6 | FINE | 25 |
| AB001248536 | 80 | 50 | 6 | VERY FINE | 25 |

**INTERLEAVED SHEETS:
ALUMINIUM OXIDE AND
NON-WOVEN FABRIC CLOTH**

APPLICATION

For grinding, satin finish and cleaning operations on common ferrous and non-ferrous steel alloys and stainless steels.

Particularly suitable for machining operations on materials with irregular and uneven surfaces, or in any case difficult to reach.

RECOMMENDED USE

Drill

Straight grinder

| Article No. | Diameter | Height | Shaft | Grit | |
|-------------|----------|--------|-------|--------------|----|
| AB001253266 | 30 | 20 | 6 | MEDIUM - 60 | 25 |
| AB001253286 | 30 | 20 | 6 | MEDIUM - 80 | 25 |
| AB001253296 | 30 | 20 | 6 | MEDIUM - 120 | 25 |
| AB001253366 | 30 | 30 | 6 | MEDIUM - 60 | 25 |
| AB001253386 | 30 | 30 | 6 | MEDIUM - 80 | 25 |
| AB001253396 | 30 | 30 | 6 | MEDIUM - 120 | 25 |
| AB001254266 | 40 | 20 | 6 | MEDIUM - 60 | 25 |
| AB001254286 | 40 | 20 | 6 | MEDIUM - 80 | 25 |
| AB001254296 | 40 | 20 | 6 | MEDIUM - 120 | 25 |
| AB001254366 | 40 | 30 | 6 | MEDIUM - 60 | 25 |
| AB001254386 | 40 | 30 | 6 | MEDIUM - 80 | 25 |
| AB001254396 | 40 | 30 | 6 | MEDIUM - 120 | 25 |
| AB001255366 | 50 | 30 | 6 | MEDIUM - 60 | 25 |
| AB001255386 | 50 | 30 | 6 | MEDIUM - 80 | 25 |
| AB001255396 | 50 | 30 | 6 | MEDIUM - 120 | 25 |
| AB001256366 | 60 | 30 | 6 | MEDIUM - 60 | 25 |
| AB001256386 | 60 | 30 | 6 | MEDIUM - 80 | 25 |
| AB001256396 | 60 | 30 | 6 | MEDIUM - 120 | 25 |
| AB001256566 | 60 | 50 | 6 | MEDIUM - 60 | 25 |
| AB001256586 | 60 | 50 | 6 | MEDIUM - 80 | 25 |
| AB001256596 | 60 | 50 | 6 | MEDIUM - 120 | 25 |
| AB001258366 | 80 | 30 | 6 | MEDIUM - 60 | 25 |
| AB001258386 | 80 | 30 | 6 | MEDIUM - 80 | 25 |
| AB001258396 | 80 | 30 | 6 | MEDIUM - 120 | 25 |
| AB001258566 | 80 | 50 | 6 | MEDIUM - 60 | 25 |
| AB001258586 | 80 | 50 | 6 | MEDIUM - 80 | 25 |
| AB001258596 | 80 | 50 | 6 | MEDIUM - 120 | 25 |

More aggressive version of the non-woven wheel,
useful to remove more resistant surface defects from the work surface.





Threaded Bore Flap Wheels

NON-WOVEN FABRIC SHEETS




APPLICATION


Use for satin and opaque finish operations of metals.

Also suitable for operations on ceramic and wood surfaces.

RECOMMENDED USE



Bench grinder



Straight grinder

| Article No. | Diameter | Height | Bore | Grit | |
|-------------|----------|--------|------|-----------|---|
| AB001320004 | 200 | 50 | 76,2 | COARSE | 2 |
| AB001320006 | 200 | 50 | 76,2 | MEDIUM | 2 |
| AB001320008 | 200 | 50 | 76,2 | FINE | 2 |
| AB001320012 | 200 | 50 | 76,2 | VERY FINE | 2 |

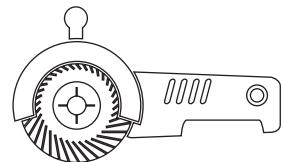
**NON-WOVEN
FABRIC SHEETS**

APPLICATION

For satin finish operations on surfaces consisting of aluminium, copper, brass, steel alloys and stainless steels.

Also suitable for the removal of oxide layers, machining of hard plastic and wood surfaces.

They ensure a high quality and uniform surface finish result.

RECOMMENDED USE


**Angle satin finishing
machine**

| Article No. | Diameter | Height | Bore | Grit | |
|-------------|----------|--------|------|-----------|---|
| AB001371519 | 100 | 50 | 19 | COARSE | 8 |
| AB001371529 | 100 | 50 | 19 | MEDIUM | 8 |
| AB001371539 | 100 | 50 | 19 | FINE | 8 |
| AB001371549 | 100 | 50 | 19 | VERY FINE | 8 |
| AB001372519 | 100 | 100 | 19 | COARSE | 4 |
| AB001372529 | 100 | 100 | 19 | MEDIUM | 4 |
| AB001372539 | 100 | 100 | 19 | FINE | 4 |
| AB001372549 | 100 | 100 | 19 | VERY FINE | 4 |
| AB001373519 | 110 | 50 | 19 | COARSE | 8 |
| AB001373529 | 110 | 50 | 19 | MEDIUM | 8 |
| AB001373539 | 110 | 50 | 19 | FINE | 8 |
| AB001373549 | 110 | 50 | 19 | VERY FINE | 8 |
| AB001374519 | 110 | 100 | 19 | COARSE | 4 |
| AB001374529 | 110 | 100 | 19 | MEDIUM | 4 |
| AB001374539 | 110 | 100 | 19 | FINE | 4 |
| AB001374549 | 110 | 100 | 19 | VERY FINE | 4 |



**INTERLEAVED SHEETS:
ALLUMINIUM OXIDE AND
NON-WOVEN FABRIC CLOTH**



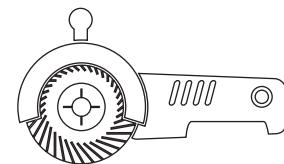
APPLICATION

For satin finish operations on surfaces consisting of aluminium, copper, brass and steel alloys.

Also suitable for the removal of oxide layers, machining of hard plastic and wood surfaces.

They ensure a high quality and uniform surface finish result.

RECOMMENDED USE



Angle satin finishing machine

| Article No. | Diameter | Height | Bore | Grit | |
|-------------|----------|--------|------|-----------------|---|
| AB001381519 | 100 | 50 | 19 | COARSE - 60 | 8 |
| AB001381529 | 100 | 50 | 19 | MEDIUM - 80 | 8 |
| AB001381539 | 100 | 50 | 19 | FINE - 120 | 8 |
| AB001381549 | 100 | 50 | 19 | VERY FINE - 240 | 8 |
| AB001382519 | 100 | 100 | 19 | COARSE - 60 | 4 |
| AB001382529 | 100 | 100 | 19 | MEDIUM - 80 | 4 |
| AB001382539 | 100 | 100 | 19 | FINE - 120 | 4 |
| AB001382549 | 100 | 100 | 19 | VERY FINE - 240 | 4 |
| AB001383519 | 110 | 50 | 19 | COARSE - 60 | 8 |
| AB001383529 | 110 | 50 | 19 | MEDIUM - 80 | 8 |
| AB001383539 | 110 | 50 | 19 | FINE - 120 | 8 |
| AB001383549 | 110 | 50 | 19 | VERY FINE - 240 | 8 |
| AB001384519 | 110 | 100 | 19 | COARSE - 60 | 4 |
| AB001384529 | 110 | 100 | 19 | MEDIUM - 80 | 4 |
| AB001384539 | 110 | 100 | 19 | FINE - 120 | 4 |
| AB001384549 | 110 | 100 | 19 | VERY FINE - 240 | 4 |

**More aggressive version of the non-woven wheel, especially suitable for particularly hard metals.
Also suitable for the removal of oxide layers.**



Radial Discs


RADIAL DISCS NON-WOVEN FABRIC SHEETS



APPLICATION

For cleaning or grinding operations of ferrous and non-ferrous steels and stainless steels.

RECOMMENDED USE



Angle grinder

Flat Profile

| Article No. | Diameter | Height | Grit | Box |
|-------------|----------|--------|-----------|-----|
| AB001400015 | 115 | 20 | COARSE | 4 |
| AB001400025 | 115 | 20 | MEDIUM | 4 |
| AB001400035 | 115 | 20 | FINE | 4 |
| AB001400045 | 115 | 20 | VERY FINE | 4 |


RADIAL DISCS INTERLEAVED SHEETS ALUMINIUM OXIDE AND NON-WOVEN FABRIC CLOTH



APPLICATION

For cleaning or grinding operations of ferrous and non-ferrous steels.

RECOMMENDED USE



Angle grinder

Flat Profile

| Article No. | Diameter | Height | Grit | Box |
|-------------|----------|--------|--------------|-----|
| AB001410015 | 115 | 20 | MEDIUM - 80 | 4 |
| AB001410025 | 115 | 20 | MEDIUM - 120 | 4 |
| AB001410035 | 115 | 20 | FINE - 150 | 4 |
| AB001410045 | 115 | 20 | FINE - 180 | 4 |




NON-WOVEN FABRIC

APPLICATION

For hand operations for the removal of oxidation and paints.

Also suitable for cleaning operations on steel and metal surfaces, plastic or fiber glass and glass fiber surfaces.

The non-Woven Fabric texture ensures high resistance to clogging on any type of surface.

RECOMMENDED USE

Hand

| Article No. | Height | Length | Grit | |
|-------------|--------|--------|------------|---|
| AB001571100 | 100 | 10000 | MEDIUM | 1 |
| AB001571110 | 100 | 10000 | FINE | 1 |
| AB001571120 | 100 | 10000 | VERY FINE | 1 |
| AB001571130 | 100 | 10000 | ULTRA FINE | 1 |
| AB001571200 | 115 | 10000 | MEDIUM | 1 |
| AB001571210 | 115 | 10000 | FINE | 1 |
| AB001571220 | 115 | 10000 | VERY FINE | 1 |
| AB001571230 | 115 | 10000 | ULTRA FINE | 1 |
| AB001571300 | 120 | 10000 | MEDIUM | 1 |
| AB001571310 | 120 | 10000 | FINE | 1 |
| AB001571320 | 120 | 10000 | VERY FINE | 1 |
| AB001571330 | 120 | 10000 | ULTRA FINE | 1 |

Abrasive Sheets

NON-WOVEN FABRIC ALUMINIUM OXIDE FIBERS




APPLICATION

For hand operations for the removal of oxidation and paints.

Also suitable for cleaning operations on steel and metal surfaces, plastic or fiber glass and glass fiber surfaces.

The non-Woven Fabric texture ensures high resistance to clogging on any type of surface.

RECOMMENDED USE



Hand

| Article No. | Height | Width | Grit | |
|-------------|--------|-------|-----------|----|
| AB001580018 | 120 | 280 | MEDIUM | 20 |
| AB001580028 | 120 | 280 | FINE | 20 |
| AB001580038 | 120 | 280 | VERY FINE | 20 |
| AB001580119 | 152 | 229 | MEDIUM | 20 |
| AB001580129 | 152 | 229 | FINE | 20 |
| AB001580139 | 152 | 229 | VERY FINE | 20 |

NON-WOVEN FABRIC SILICON CARBIDE FIBERS




APPLICATION

For hand operations for the removal of oxidation and paints.

Also suitable for cleaning operations on steel and metal surfaces, plastic or fiber glass and glass fiber surfaces.

The non-Woven Fabric texture ensures high resistance to clogging on any type of surface.

RECOMMENDED USE



Hand

| Article No. | Height | Width | Grit | |
|-------------|--------|-------|------------|----|
| AB001580218 | 120 | 280 | ULTRA FINE | 20 |
| AB001580319 | 152 | 229 | ULTRA FINE | 20 |

abrabetait





POLISHING PRODUCTS





Felt Flap Discs and Wheels

FELT SHEETS




APPLICATION

For polishing operations on all types of steel, combined with abrasive polishing pastes.

Particularly suitable for operations on automotive bodywork.

RECOMMENDED USE



Angle grinder

GLASS FIBER BACKING PAD - Flat Profile



Article No.

Diameter

Type

AB001170004

115

SINGLE-FLAP

20

AB001170104

125

SINGLE-FLAP

20

FELT SHEETS




APPLICATION

For polishing operations on all types of steel, combined with abrasive polishing pastes.

Particularly suitable for machining operations on automotive bodywork.

RECOMMENDED USE



Drill



Straight grinder

Article No.

Diameter

Height

Shaft

AB001234306

40

30

6

25

AB001235306

50

30

6

25

AB001236306

60

30

6

25



Felt Mounted Points

FELT MOUNTED POINTS




APPLICATION


For extremely accurate polishing operations on all types of steel, combined with abrasive polishing pastes.

Particularly suitable for machining operations on automotive bodywork.

RECOMMENDED USE



Drill



Straight grinder

| Article No. | Diameter | Height | Shaft | Shape | |
|-------------|----------|--------|-------|-------------|----|
| AB001236100 | 6 | 10 | 3 | Cylindrical | 10 |
| AB001236110 | 10 | 20 | 3 | Cylindrical | 10 |
| AB001236120 | 10 | 14 | 6 | Cylindrical | 10 |
| AB001236130 | 15 | 20 | 6 | Cylindrical | 10 |
| AB001236140 | 20 | 25 | 6 | Cylindrical | 10 |
| AB001236150 | 25 | 30 | 6 | Cylindrical | 10 |
| AB001236160 | 30 | 30 | 6 | Cylindrical | 10 |



abrabetait





VELCRO DISCS



Velcro Discs

ALUMINIUM OXIDE PAPER



APPLICATION

For smoothing operations on wood and metal surfaces in general. Coarse grits are suitable for aggressive smoothing operations, fine grits are particularly suitable for gentle smoothing operations.



RECOMMENDED USE



Random orbital sander



| Article No. | Diameter | Bores | Grit | |
|-------------|----------|-------|------|-----|
| AB001700104 | 115 | - | 40 | 50 |
| AB001700106 | 115 | - | 60 | 50 |
| AB001700108 | 115 | - | 80 | 50 |
| AB001700110 | 115 | - | 100 | 100 |
| AB001700112 | 115 | - | 120 | 100 |
| AB001700118 | 115 | - | 180 | 100 |
| AB001700122 | 115 | - | 220 | 100 |
| AB001700204 | 125 | 8 | 40 | 50 |
| AB001700206 | 125 | 8 | 60 | 50 |
| AB001700208 | 125 | 8 | 80 | 50 |
| AB001700210 | 125 | 8 | 100 | 100 |
| AB001700212 | 125 | 8 | 120 | 100 |
| AB001700218 | 125 | 8 | 180 | 100 |
| AB001700222 | 125 | 8 | 220 | 100 |
| AB001700304 | 150 | - | 40 | 50 |
| AB001700306 | 150 | - | 60 | 50 |
| AB001700308 | 150 | - | 80 | 50 |
| AB001700310 | 150 | - | 100 | 100 |
| AB001700312 | 150 | - | 120 | 100 |
| AB001700318 | 150 | - | 180 | 100 |
| AB001700322 | 150 | - | 220 | 100 |
| AB001700404 | 150 | 6 | 40 | 50 |
| AB001700406 | 150 | 6 | 60 | 50 |
| AB001700408 | 150 | 6 | 80 | 50 |
| AB001700410 | 150 | 6 | 100 | 100 |
| AB001700412 | 150 | 6 | 120 | 100 |
| AB001700418 | 150 | 6 | 180 | 100 |
| AB001700422 | 150 | 6 | 220 | 100 |
| AB001700504 | 150 | 8+1 | 40 | 50 |
| AB001700506 | 150 | 8+1 | 60 | 50 |
| AB001700508 | 150 | 8+1 | 80 | 50 |
| AB001700510 | 150 | 8+1 | 100 | 100 |
| AB001700512 | 150 | 8+1 | 120 | 100 |
| AB001700518 | 150 | 8+1 | 180 | 100 |
| AB001700522 | 150 | 8+1 | 220 | 100 |

ALUMINIUM OXIDE RESIN COATED PAPER

APPLICATION

For smoothing operations on wood surfaces, paint, resin and metal in general.

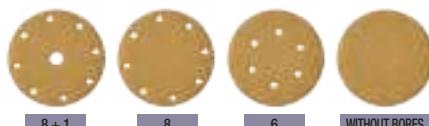Coarse grits are suitable for aggressive smoothing operations, fine grits are particularly suitable for gentle smoothing operations. The cloth resin coating prevents clogging of work surfaces.


RECOMMENDED USE

Random orbital sander

| Article No. | Diameter | Bores | Grit | |
|-------------|----------|-------|------|-----|
| AB001710208 | 125 | - | 80 | 50 |
| AB001710210 | 125 | - | 100 | 100 |
| AB001710212 | 125 | - | 120 | 100 |
| AB001710218 | 125 | - | 180 | 100 |
| AB001710222 | 125 | - | 220 | 100 |
| AB001710228 | 125 | - | 280 | 100 |
| AB001710232 | 125 | - | 320 | 100 |
| AB001710240 | 125 | - | 400 | 100 |
| AB001710308 | 125 | 8 | 80 | 50 |
| AB001710310 | 125 | 8 | 100 | 100 |
| AB001710312 | 125 | 8 | 120 | 100 |
| AB001710318 | 125 | 8 | 180 | 100 |
| AB001710322 | 125 | 8 | 220 | 100 |
| AB001710328 | 125 | 8 | 280 | 100 |
| AB001710332 | 125 | 8 | 320 | 100 |
| AB001710340 | 125 | 8 | 400 | 100 |
| AB001710408 | 150 | - | 80 | 50 |
| AB001710410 | 150 | - | 100 | 100 |
| AB001710412 | 150 | - | 120 | 100 |
| AB001710418 | 150 | - | 180 | 100 |
| AB001710422 | 150 | - | 220 | 100 |
| AB001710428 | 150 | - | 280 | 100 |
| AB001710432 | 150 | - | 320 | 100 |
| AB001710440 | 150 | - | 400 | 100 |
| AB001710508 | 150 | 6 | 80 | 50 |
| AB001710510 | 150 | 6 | 100 | 100 |
| AB001710512 | 150 | 6 | 120 | 100 |
| AB001710518 | 150 | 6 | 180 | 100 |
| AB001710522 | 150 | 6 | 220 | 100 |
| AB001710528 | 150 | 6 | 280 | 100 |
| AB001710532 | 150 | 6 | 320 | 100 |
| AB001710540 | 150 | 6 | 400 | 100 |
| AB001710608 | 150 | 8+1 | 80 | 50 |
| AB001710610 | 150 | 8+1 | 100 | 100 |
| AB001710612 | 150 | 8+1 | 120 | 100 |
| AB001710618 | 150 | 8+1 | 180 | 100 |
| AB001710622 | 150 | 8+1 | 220 | 100 |
| AB001710628 | 150 | 8+1 | 280 | 100 |
| AB001710632 | 150 | 8+1 | 320 | 100 |
| AB001710640 | 150 | 8+1 | 400 | 100 |
| AB001710708 | 150 | 8+6+1 | 80 | 50 |
| AB001710710 | 150 | 8+6+1 | 100 | 100 |
| AB001710712 | 150 | 8+6+1 | 120 | 100 |
| AB001710718 | 150 | 8+6+1 | 180 | 100 |
| AB001710722 | 150 | 8+6+1 | 220 | 100 |
| AB001710728 | 150 | 8+6+1 | 280 | 100 |
| AB001710732 | 150 | 8+6+1 | 320 | 100 |
| AB001710740 | 150 | 8+6+1 | 400 | 100 |



Velcro Discs

SILICON CARBIDE PAPER




WITHOUT BORES

APPLICATION

For smoothing operations on wood surfaces, paint, resin, glass and natural stone.

Coarse grits are suitable for aggressive smoothing operations, fine grits are particularly suitable for gentle smoothing operations.

RECOMMENDED USE



Random orbital sander


| Article No. | Diameter | Bores | Grit | |
|-------------|----------|-------|------|-----|
| AB001720108 | 115 | - | 80 | 50 |
| AB001720110 | 115 | - | 100 | 100 |
| AB001720112 | 115 | - | 120 | 100 |
| AB001720118 | 115 | - | 180 | 100 |
| AB001720122 | 115 | - | 220 | 100 |
| AB001720128 | 115 | - | 280 | 100 |
| AB001720132 | 115 | - | 320 | 100 |
| AB001720140 | 115 | - | 400 | 100 |
| AB001720160 | 115 | - | 600 | 100 |
| AB001720208 | 125 | - | 80 | 50 |
| AB001720210 | 125 | - | 100 | 100 |
| AB001720212 | 125 | - | 120 | 100 |
| AB001720218 | 125 | - | 180 | 100 |
| AB001720222 | 125 | - | 220 | 100 |
| AB001720228 | 125 | - | 280 | 100 |
| AB001720232 | 125 | - | 320 | 100 |
| AB001720240 | 125 | - | 400 | 100 |
| AB001720260 | 125 | - | 600 | 100 |
| AB001720308 | 150 | - | 80 | 50 |
| AB001720310 | 150 | - | 100 | 100 |
| AB001720312 | 150 | - | 120 | 100 |
| AB001720318 | 150 | - | 180 | 100 |
| AB001720322 | 150 | - | 220 | 100 |
| AB001720328 | 150 | - | 280 | 100 |
| AB001720332 | 150 | - | 320 | 100 |
| AB001720340 | 150 | - | 400 | 100 |
| AB001720346 | 150 | - | 600 | 100 |
| AB001720408 | 180 | - | 80 | 50 |
| AB001720410 | 180 | - | 100 | 100 |
| AB001720412 | 180 | - | 120 | 100 |
| AB001720418 | 180 | - | 180 | 100 |
| AB001720422 | 180 | - | 220 | 100 |
| AB001720428 | 180 | - | 280 | 100 |
| AB001720432 | 180 | - | 320 | 100 |
| AB001720440 | 180 | - | 400 | 100 |
| AB001720460 | 180 | - | 600 | 100 |

ZIRCONIA PAPER

APPLICATION

For smoothing operations on wood surfaces, paint, resin and stainless steel.

Coarse grits are suitable for aggressive smoothing operations, fine grits are particularly suitable for gentle smoothing operations.

RECOMMENDED USE


Random orbital sander

8 + 6 + 1

| Article No. | Diameter | Bores | Grit | |
|-------------|----------|-------|------|-----|
| AB001730108 | 150 | 8+6+1 | 80 | 50 |
| AB001730110 | 150 | 8+6+1 | 100 | 100 |
| AB001730112 | 150 | 8+6+1 | 120 | 100 |
| AB001730118 | 150 | 8+6+1 | 180 | 100 |
| AB001730122 | 150 | 8+6+1 | 220 | 100 |
| AB001730128 | 150 | 8+6+1 | 280 | 100 |
| AB001730132 | 150 | 8+6+1 | 320 | 100 |
| AB001730140 | 150 | 8+6+1 | 400 | 100 |
| AB001730150 | 150 | 8+6+1 | 500 | 100 |
| AB001730160 | 150 | 8+6+1 | 600 | 100 |
| AB001730180 | 150 | 8+6+1 | 800 | 100 |



Backing Pads for Velcro Discs


BACKING PADS FOR VELCRO DISCS



APPLICATION

For the application of velcro discs of respective types and sizes.

RECOMMENDED USE



Angle grinder

| Article No. | Diameter | Bores | Fixing | |
|-------------|----------|-------|--------|---|
| AB001760115 | 115 | - | M14 | 1 |
| AB001760125 | 125 | - | M14 | 1 |
| AB001760150 | 150 | - | M14 | 1 |
| AB001760180 | 180 | - | M14 | 1 |


BACKING PADS FOR VELCRO DISCS



APPLICATION

For the application of velcro discs of respective types and sizes.

RECOMMENDED USE



Random orbital sander

| Article No. | Diameter | Bores | Fixing | |
|-------------|----------|-------|--------|---|
| AB001761125 | 125 | 8 | - | 1 |
| AB001761150 | 150 | - | - | 1 |
| AB001761156 | 150 | 6 | - | 1 |

BACKING PADS FOR VELCRO DISCS




APPLICATION

For the application of velcro discs of respective types and sizes.

The backing pad is supplied with a fixing kit for the power tool.

RECOMMENDED USE



Random orbital sander

| Article No. | Diameter | Bores | Fixing | |
|-------------|----------|-------|---------|---|
| AB001762150 | 150 | 8+1 | 5/16+M8 | 1 |
| AB001762156 | 150 | 8+6+1 | 5/16+M8 | 1 |



**FLEX
DISCS**





Fiber Discs

ZIRCONIA FIBER DISCS




APPLICATION

For operations on particularly demanding metal surfaces requiring a high performance.

Also suitable for stainless steel.


Coarse grits are suitable for grinding and rough grinding operations, fine grits are particularly suitable for finishing operations.

RECOMMENDED USE



Angle grinder

Flat Profile



| Article No. | Diameter | Grit | |
|-------------|----------|------|----|
| AB001431024 | 115 | 24 | 25 |
| AB001431036 | 115 | 36 | 25 |
| AB001431060 | 115 | 60 | 25 |
| AB001431120 | 115 | 120 | 25 |
| AB001432024 | 125 | 24 | 25 |
| AB001432036 | 125 | 36 | 25 |
| AB001432060 | 125 | 60 | 25 |
| AB001432120 | 125 | 120 | 25 |
| AB001433024 | 180 | 24 | 25 |
| AB001433036 | 180 | 36 | 25 |
| AB001433060 | 180 | 60 | 25 |
| AB001433120 | 180 | 120 | 25 |




**ALUMINIUM OXIDE
FIBER DISCS**

APPLICATION

For operations on particularly demanding metal surfaces requiring a high performance.
Also suitable for stainless steel.

Coarse grits are suitable for grinding and rough grinding operations, fine grits are particularly suitable for finishing operations.

RECOMMENDED USE

Angle grinder
Flat Profile


| Article No. | Diameter | Grit | |
|-------------|----------|------|----|
| AB001441024 | 115 | 24 | 25 |
| AB001441036 | 115 | 36 | 25 |
| AB001441060 | 115 | 60 | 25 |
| AB001441120 | 115 | 120 | 25 |
| AB001442024 | 125 | 24 | 25 |
| AB001442036 | 125 | 36 | 25 |
| AB001442060 | 125 | 60 | 25 |
| AB001442120 | 125 | 120 | 25 |
| AB001443024 | 180 | 24 | 25 |
| AB001443036 | 180 | 36 | 25 |
| AB001443060 | 180 | 60 | 25 |
| AB001443120 | 180 | 120 | 25 |



For operations on less demanding surfaces in iron, steel and non-ferrous metals.
Also suitable for aluminium, cast iron and wood.

**SILICON CARBIDE
FIBER DISCS**

APPLICATION

For use on marble, stone and granite surfaces.
Also suitable for glass.

The convex profile ensures greater capacity to reach uneven surfaces.

RECOMMENDED USE

Angle grinder
Convex Profile


| Article No. | Diameter | Grit | |
|-------------|----------|------|----|
| AB001453120 | 180 | 120 | 25 |
| AB001453220 | 180 | 220 | 25 |
| AB001453320 | 180 | 320 | 25 |



Backing Pads for Fiber Discs

BACKING PADS FOR FIBER DISCS




APPLICATION

For the application of fiber discs of respective types.

The backing pad is supplied with a lock nut for the power tool.

RECOMMENDED USE



Angle grinder

| Article No. | Diameter | |
|-------------|----------|---|
| AB001475115 | 115 | 1 |
| AB001475125 | 125 | 1 |
| AB001475180 | 180 | 1 |



Semi-Flex Discs

SILICON CARBIDE SEMI-FLEX DISCS




APPLICATION

For use on marble, stone and granite surfaces. Suitable for operations on fiberglass and removal of layers of calamine. Also suitable for glass.

The disc structure bestows high resistance and abrasive power. The convex profile ensures greater capacity to reach uneven surfaces.

Coarse grits are suitable for grinding and rough grinding operations, fine grits are particularly suitable for finishing operations.

RECOMMENDED USE



Angle grinder

CARDBOARD BACKING PAD - Flat Profile



| Article No. | Diameter | Grit | |
|-------------|----------|------|----|
| AB001471116 | 115 | 16 | 25 |
| AB001471124 | 115 | 24 | 25 |
| AB001471136 | 115 | 36 | 25 |
| AB001471160 | 115 | 60 | 25 |
| AB001471216 | 125 | 16 | 25 |
| AB001471224 | 125 | 24 | 25 |
| AB001471236 | 125 | 36 | 25 |
| AB001471260 | 125 | 60 | 25 |
| AB001471816 | 180 | 16 | 25 |
| AB001471824 | 180 | 24 | 25 |
| AB001471836 | 180 | 36 | 25 |
| AB001471860 | 180 | 60 | 25 |

SILICON CARBIDE SEMI-FLEX DISCS




APPLICATION

For use on marble, stone and granite surfaces. Suitable for operations on fiberglass and removal of layers of calamine. Also suitable for glass.

The disc structure bestows high resistance and abrasive power. The convex profile ensures greater capacity to reach uneven surfaces.


Coarse grits are suitable for grinding and rough grinding operations, fine grits are particularly suitable for finishing operations.

RECOMMENDED USE



Angle grinder

GLASS FIBER BACKING PAD - Flat Profile



| Article No. | Diameter | Grit | |
|-------------|----------|------|----|
| AB001472124 | 125 | 24 | 25 |
| AB001472136 | 125 | 36 | 25 |
| AB001472224 | 180 | 24 | 25 |
| AB001472236 | 180 | 36 | 25 |

abrabetait





STRIPPING PRODUCTS



Mounted Stripping Wheels and Discs

STRIPPING WHEELS




APPLICATION

For gentle finishing and cleaning operations of the work surface.

The non-Woven Fabric texture prevents abrasive clogging during use.

RECOMMENDED USE



Drill



Straight grinder

MOUNTED STRIPPING WHEELS

| Article No. | Diameter | Height | Shaft | |
|-------------|----------|--------|-------|----|
| AB001271136 | 100 | 13 | 6 | 10 |
| AB001271538 | 150 | 13 | 8 | 10 |

STRIPPING DISCS




APPLICATION

For finishing and cleaning operations of the work surface.

The texture of the disc prevents abrasive clogging during use.

RECOMMENDED USE



Straight grinder

MOUNTED STRIPPING DISCS

| Article No. | Diameter | Bore | |
|-------------|-----------|------|----|
| AB001481413 | 100 | 13 | 10 |
| AB001481420 | SHAFT 6mm | M12 | 1 |
| AB001481513 | 150 | 13 | 10 |
| AB001481520 | SHAFT 8mm | M12 | 1 |



Threaded Bore Unitized Discs


UNITIZED DISCS



APPLICATION

For deburring and finishing operations on steels, stainless steels, ferrous and non-ferrous metals, plastic and composite materials.

RECOMMENDED USE



Angle grinder

THREADED BORE UNITIZED DISCS

| Article No. | Diameter | Grit | Bore | |
|-------------|----------|-----------|------|----|
| AB001481122 | 115 | 2S FINE | 22 | 10 |
| AB001481132 | 115 | 2A MEDIUM | 22 | 10 |
| AB001481142 | 115 | 3S FINE | 22 | 10 |
| AB001481152 | 115 | 6A MEDIUM | 22 | 10 |
| AB001481222 | 127 | 2S FINE | 22 | 10 |
| AB001481232 | 127 | 2A MEDIUM | 22 | 10 |
| AB001481242 | 127 | 3S FINE | 22 | 10 |
| AB001481252 | 127 | 6A MEDIUM | 22 | 10 |



Stripping Discs Threaded Bore

STRIPPING DISCS




APPLICATION

For finishing and cleaning operations of the work surface: ferrous and non ferrous metals, stainless steels. Suitable for removal of calamine, rust, paint, rubber, wood and glue residues.

The texture of the disc prevents abrasive clogging during use.

RECOMMENDED USE



Angle grinder

STRIPPING DISCS THREADED BORE - FIBER GLASS BACKING PAD

| Article No. | Diameter | Bore | |
|-------------|----------|------|----|
| AB001481322 | 115 | 22 | 10 |
| AB001481332 | 127 | 22 | 10 |
| AB001481342 | 178 | 22 | 5 |

CERAMIC STRIPPING DISCS




APPLICATION

For finishing and cleaning operations of the work surface: ferrous and non ferrous metals, stainless steels. Suitable for removal of calamine, rust, paint, rubber, wood and glue residues.

The texture of the disc prevents abrasive clogging during use.

RECOMMENDED USE



Angle grinder

CERAMIC STRIPPING DISCS THREADED BORE – FIBER GLASS BACKING PAD

| Article No. | Diameter | Bore | |
|-------------|----------|------|----|
| AB001490115 | 115 | 22 | 10 |
| AB001490127 | 127 | 22 | 10 |
| AB001490178 | 178 | 22 | 5 |



ABRASIVE SPIROBANDS





Abrasive Spirobands

ZIRCONIA CLOTH



APPLICATION


For accurate operations on ferrous and non-ferrous metals.
Also suitable for operations on stainless steels.

Coarse grits are suitable for smoothing operations of less regular surfaces.

Fine grits are suitable for more gentle finishing operations.

Its reduced dimension allows to reach any type of work surface.

RECOMMENDED USE



Drill



Straight grinder

| Article No. | Diameter | Height | Grit | |
|-------------|----------|--------|------|-----|
| AB001501204 | 10 | 20 | 40 | 100 |
| AB001501206 | 10 | 20 | 60 | 100 |
| AB001501208 | 10 | 20 | 80 | 100 |
| AB001501212 | 10 | 20 | 120 | 100 |
| AB001501304 | 15 | 30 | 40 | 100 |
| AB001501306 | 15 | 30 | 60 | 100 |
| AB001501308 | 15 | 30 | 80 | 100 |
| AB001501312 | 15 | 30 | 120 | 100 |
| AB001502204 | 25 | 25 | 40 | 100 |
| AB001502206 | 25 | 25 | 60 | 100 |
| AB001502208 | 25 | 25 | 80 | 100 |
| AB001502212 | 25 | 25 | 120 | 100 |
| AB001503304 | 30 | 30 | 40 | 100 |
| AB001503306 | 30 | 30 | 60 | 100 |
| AB001503308 | 30 | 30 | 80 | 100 |
| AB001503312 | 30 | 30 | 120 | 100 |
| AB001504304 | 45 | 30 | 40 | 100 |
| AB001504306 | 45 | 30 | 60 | 100 |
| AB001504308 | 45 | 30 | 80 | 100 |
| AB001504312 | 45 | 30 | 120 | 100 |
| AB001506304 | 60 | 30 | 40 | 100 |
| AB001506306 | 60 | 30 | 60 | 100 |
| AB001506308 | 60 | 30 | 80 | 100 |
| AB001506312 | 60 | 30 | 120 | 100 |

Particularly suitable for accurate operations on stainless steels, ferrous and non-ferrous metals.

ALUMINIUM OXIDE CLOTH


APPLICATION

For accurate operations on ferrous and non-ferrous metals.


Coarse grits are suitable for smoothing operations on less regular surfaces.

Fine grits are suitable for more gentle finishing operations.

Its reduced dimension allows to reach any type of work surface.

RECOMMENDED USE


Drill



Straight grinder


| Article No. | Diameter | Height | Grit | |
|-------------|----------|--------|------|-----|
| AB001511304 | 15 | 30 | 40 | 100 |
| AB001511306 | 15 | 30 | 60 | 100 |
| AB001511312 | 15 | 30 | 120 | 100 |
| AB001513304 | 30 | 30 | 40 | 100 |
| AB001513306 | 30 | 30 | 60 | 100 |
| AB001513312 | 30 | 30 | 120 | 100 |

SPIROBAND HOLDER

APPLICATION

To suit spirobands of corresponding size.

The diameter of spiroband holder shaft is 6 mm for all sizes.

RECOMMENDED USE


Drill



Straight grinder

| Article No. | Diameter | Height | Material | |
|-------------|----------|--------|----------|----|
| AB001541020 | 10 | 20 | RUBBER | 10 |
| AB001541530 | 15 | 30 | RUBBER | 10 |
| AB001542525 | 25 | 25 | RUBBER | 10 |
| AB001543030 | 30 | 30 | RUBBER | 10 |
| AB001544530 | 45 | 30 | RUBBER | 10 |
| AB001546030 | 60 | 30 | RUBBER | 10 |

abrabetait





**WASTE-FREE
ROLLS**



Waste-Free Rolls

ALUMINIUM OXIDE CLOTH


APPLICATION

For universal use on ferrous and non-ferrous metals and different types of steel. Also suitable for operations on wood, stucco, plaster, paints, etc.

Coarse grits are suitable for smoothing operations on less regular surfaces.

Fine grits are suitable for more gentle finishing operations.

The cloth backing pad ensures a very high abrasive resistance strength during use.

RECOMMENDED USE


Hand

| Article No. | Height | Length | Grit | |
|-------------|--------|--------|------|---|
| AB001553004 | 38 | 50000 | 40 | 1 |
| AB001553006 | 38 | 50000 | 60 | 1 |
| AB001553008 | 38 | 50000 | 80 | 1 |
| AB001553010 | 38 | 50000 | 100 | 1 |
| AB001553012 | 38 | 50000 | 120 | 1 |
| AB001553015 | 38 | 50000 | 150 | 1 |
| AB001553018 | 38 | 50000 | 180 | 1 |
| AB001553022 | 38 | 50000 | 220 | 1 |
| AB001553024 | 38 | 50000 | 240 | 1 |
| AB001553028 | 38 | 50000 | 280 | 1 |
| AB001553032 | 38 | 50000 | 320 | 1 |
| AB001553040 | 38 | 50000 | 400 | 1 |
| AB001555004 | 50 | 50000 | 40 | 1 |
| AB001555006 | 50 | 50000 | 60 | 1 |
| AB001555008 | 50 | 50000 | 80 | 1 |
| AB001555010 | 50 | 50000 | 100 | 1 |
| AB001555012 | 50 | 50000 | 120 | 1 |
| AB001555015 | 50 | 50000 | 150 | 1 |
| AB001555018 | 50 | 50000 | 180 | 1 |
| AB001555022 | 50 | 50000 | 220 | 1 |
| AB001555024 | 50 | 50000 | 240 | 1 |
| AB001555028 | 50 | 50000 | 280 | 1 |
| AB001555032 | 50 | 50000 | 320 | 1 |
| AB001555040 | 50 | 50000 | 400 | 1 |
| AB001555104 | 120 | 50000 | 40 | 1 |
| AB001555106 | 120 | 50000 | 60 | 1 |
| AB001555108 | 120 | 50000 | 80 | 1 |
| AB001555110 | 120 | 50000 | 100 | 1 |
| AB001555112 | 120 | 50000 | 120 | 1 |
| AB001555115 | 120 | 50000 | 150 | 1 |
| AB001555118 | 120 | 50000 | 180 | 1 |
| AB001555124 | 120 | 50000 | 240 | 1 |
| AB001555132 | 120 | 50000 | 320 | 1 |
| AB001555140 | 120 | 50000 | 400 | 1 |


ALUMINIUM OXIDE PAPER

APPLICATION

Universal use for hand dry sanding operations on wood surfaces, paints and plasters.

Coarse grits are suitable for smoothing operations on less regular surfaces.
Fine grits are suitable for more gentle finishing operations.

The paper backing pad ensures higher flexibility of the abrasive during use.

RECOMMENDED USE


Hand

| Article No. | Height | Length | Grit | |
|-------------|--------|--------|------|---|
| AB001565104 | 120 | 5000 | 40 | 9 |
| AB001565106 | 120 | 5000 | 60 | 9 |
| AB001565108 | 120 | 5000 | 80 | 9 |
| AB001565110 | 120 | 5000 | 100 | 9 |
| AB001565112 | 120 | 5000 | 120 | 9 |
| AB001565118 | 120 | 5000 | 180 | 9 |
| AB001565124 | 120 | 5000 | 240 | 9 |
| AB001565132 | 120 | 5000 | 320 | 9 |



abrabetait





ABRASIVE BELTS





Abrasive Belts

ZIRCONIA CLOTH



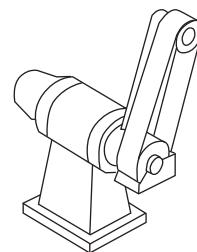
APPLICATION

For dry operations on stainless steel surfaces, steels, ferrous and non-ferrous metals by using stationary or hand-held machines.

Coarse grits are suitable for smoothing operations on less regular surfaces.

Fine grits are suitable for more gentle finishing operations.

RECOMMENDED USE



Bench smoothing machine

| Article No. | Height | Length | Grit | |
|-------------|--------|--------|------|----|
| AB001601214 | 120 | 1500 | 40 | 10 |
| AB001601216 | 120 | 1500 | 60 | 10 |
| AB001601218 | 120 | 1500 | 80 | 10 |
| AB001601236 | 120 | 1500 | 120 | 10 |
| AB001605024 | 50 | 2000 | 40 | 10 |
| AB001605026 | 50 | 2000 | 60 | 10 |
| AB001605028 | 50 | 2000 | 80 | 10 |
| AB001605036 | 50 | 2000 | 120 | 10 |



ABRASIVE SHEETS

Abrasive Sheets

ALUMINIUM OXIDE CLOTH



APPLICATION


Universal use for hand operations on metals and woods.

Coarse grits are suitable for smoothing operations on less regular surfaces.

Fine grits are suitable for more gentle finishing operations.

The cloth backing pad ensures a very high abrasive resistance strength during use.

RECOMMENDED USE



Hand

| Article No. | Width | Length | Grit | |
|-------------|-------|--------|------|----|
| AB001642324 | 230 | 280 | 40 | 50 |
| AB001642326 | 230 | 280 | 60 | 50 |
| AB001642328 | 230 | 280 | 80 | 50 |
| AB001642332 | 230 | 280 | 120 | 50 |
| AB001642336 | 230 | 280 | 180 | 50 |
| AB001642348 | 230 | 280 | 240 | 50 |
| AB001642352 | 230 | 280 | 320 | 50 |
| AB001642356 | 230 | 280 | 400 | 50 |





MOUNTED POINTS FOR STEEL





Mounted Points for Steel


APPLICATION

Universal use for machining all types of steel.

FEATURES

- Pink aluminium oxide
- Vitrified binder

RECOMMENDED USE



Straight grinder

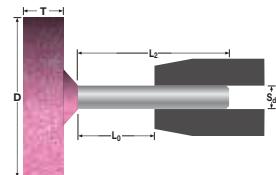



Figure 1

MOUNTED POINTS FOR STEEL - Cylindrical

| Article No. | Diameter (D) | Thickness (T) | Shaft (S _d x L ₂) | Specification | Figure | Max RPM (L _o =13 mm) | |
|-------------|--------------|---------------|--|---------------|--------|---------------------------------|----|
| AB00090003 | 3 | 6 | 3x37 | AR80P5V | 1 | 130.000 | 50 |
| AB00090006 | 3 | 10 | 3x37 | AR80P5V | 1 | 130.000 | 50 |
| AB00090009 | 4 | 8 | 3x37 | AR60P5V | 1 | 130.000 | 50 |
| AB00090012 | 5 | 10 | 3x37 | AR60P5V | 1 | 105.700 | 50 |
| AB00090015 | 6 | 10 | 3x37 | AR60P5V | 1 | 93.100 | 50 |
| AB00090018 | 6 | 13 | 3x37 | AR60P5V | 1 | 77.800 | 50 |
| AB00090021 | 6 | 20 | 3x37 | AR60P5V | 1 | 55.100 | 50 |
| AB00090024 | 8 | 12 | 3x37 | AR60P5V | 1 | 64.500 | 50 |
| AB00090027 | 8 | 16 | 3x37 | AR60P5V | 1 | 51.700 | 50 |
| AB00090030 | 10 | 4 | 3x37 | AR60P5V | 1 | 95.400 | 50 |
| AB00090033 | 10 | 10 | 3x37 | AR60P5V | 1 | 60.100 | 50 |
| AB00090036 | 10 | 12 | 3x37 | AR60P5V | 1 | 52.700 | 50 |
| AB00090039 | 10 | 20 | 3x37 | AR60P5V | 1 | 34.700 | 50 |
| AB00090042 | 12 | 15 | 3x37 | AR60P5V | 1 | 37.300 | 50 |
| AB00090045 | 3 | 6 | 6x40 | AR80P5V | 1 | 130.000 | 25 |
| AB00090048 | 4 | 8 | 6x40 | AR60P5V | 1 | 130.000 | 25 |
| AB00090051 | 5 | 10 | 6x40 | AR60P5V | 1 | 130.000 | 25 |
| AB00090054 | 6 | 10 | 6x40 | AR60P5V | 1 | 130.000 | 25 |
| AB00090057 | 6 | 20 | 6x40 | AR60P5V | 1 | 117.700 | 25 |
| AB00090060 | 8 | 10 | 6x40 | AR60P5V | 1 | 119.300 | 25 |
| AB00090063 | 8 | 16 | 6x40 | AR60P5V | 1 | 116.600 | 25 |
| AB00090066 | 10 | 10 | 6x40 | AR60P5V | 1 | 95.400 | 25 |
| AB00090069 | 10 | 15 | 6x40 | AR60P5V | 1 | 95.400 | 25 |
| AB00090072 | 10 | 20 | 6x40 | AR60P5V | 1 | 86.600 | 25 |
| AB00090075 | 10 | 25 | 6x40 | AR60P5V | 1 | 72.700 | 25 |
| AB00090078 | 10 | 32 | 6x40 | AR60P5V | 1 | 58.700 | 25 |
| AB00090081 | 12 | 10 | 6x40 | AR60P5V | 1 | 79.500 | 25 |
| AB00090084 | 12 | 15 | 6x40 | AR60P5V | 1 | 79.500 | 25 |
| AB00090087 | 12 | 20 | 6x40 | AR60P5V | 1 | 79.500 | 25 |
| AB00090090 | 12 | 30 | 6x40 | AR60P5V | 1 | 53.800 | 25 |
| AB00090093 | 15 | 3 | 6x40 | AR60P5V | 1 | 63.600 | 25 |
| AB00090096 | 15 | 15 | 6x40 | AR60P5V | 1 | 63.600 | 25 |
| AB000900102 | 16 | 20 | 6x40 | AR46P5V | 1 | 59.600 | 25 |
| AB000900108 | 16 | 25 | 6x40 | AR46P5V | 1 | 56.900 | 25 |
| AB000900114 | 16 | 32 | 6x40 | AR46P5V | 1 | 45.100 | 25 |
| AB000900120 | 16 | 40 | 6x40 | AR46P5V | 1 | 35.800 | 25 |
| AB000900123 | 20 | 4 | 6x40 | AR60P5V | 1 | 47.700 | 25 |
| AB000900126 | 20 | 15 | 6x40 | AR46P5V | 1 | 47.700 | 25 |
| AB000900129 | 20 | 20 | 6x40 | AR46P5V | 1 | 47.700 | 25 |

| Article No. | Diameter (D) | Thickness (T) | Shaft (S _d x L ₂) | Specification | Figure | Max RPM (Lo=13 mm) | |
|-------------|--------------|---------------|--|---------------|--------|--------------------|----|
| AB000900132 | 20 | 25 | 6x40 | AR46P5V | 1 | 46.100 | 25 |
| AB000900135 | 20 | 30 | 6x40 | AR46P5V | 1 | 38.900 | 25 |
| AB000900138 | 20 | 32 | 6x40 | AR46P5V | 1 | 36.500 | 25 |
| AB000900141 | 20 | 40 | 6x40 | AR46P5V | 1 | 29.000 | 25 |
| AB000900144 | 25 | 6 | 6x40 | AR60P5V | 1 | 38.100 | 25 |
| AB000900147 | 25 | 10 | 6x40 | AR60P5V | 1 | 38.100 | 25 |
| AB000900150 | 25 | 25 | 6x40 | AR36/46P5V | 1 | 37.200 | 25 |
| AB000900153 | 25 | 40 | 6x40 | AR36/46P5V | 1 | 23.300 | 10 |
| AB000900156 | 30 | 6 | 6x40 | AR60P5V | 1 | 31.800 | 25 |
| AB000900159 | 30 | 10 | 6x40 | AR60P5V | 1 | 31.800 | 25 |
| AB000900162 | 30 | 30 | 6x40 | AR36/46P5V | 1 | 26.200 | 25 |
| AB000900165 | 30 | 40 | 6x40 | AR36/46P5V | 1 | 19.500 | 10 |
| AB000900168 | 32 | 20 | 6x40 | AR36P5V | 1 | 29.800 | 25 |
| AB000900171 | 32 | 32 | 6x40 | AR36P5V | 1 | 23.100 | 10 |
| AB000900174 | 40 | 6 | 6x40 | AR60P5V | 1 | 23.800 | 25 |
| AB000900177 | 40 | 10 | 6x40 | AR36/46P5V | 1 | 23.800 | 25 |
| AB000900180 | 40 | 20 | 6x40 | AR36P5V | 1 | 23.800 | 10 |
| AB000900183 | 40 | 25 | 6x40 | AR36P5V | 1 | 23.400 | 10 |
| AB000900186 | 40 | 30 | 6x40 | AR36P5V | 1 | 19.700 | 10 |
| AB000900189 | 40 | 40 | 6x40 | AR36P5V | 1 | 14.700 | 10 |
| AB000900192 | 50 | 10 | 6x40 | AR36P5V | 1 | 19.000 | 10 |
| AB000900195 | 50 | 15 | 6x40 | AR36P5V | 1 | 19.000 | 10 |
| AB000900198 | 50 | 25 | 6x40 | AR36P5V | 1 | 18.800 | 10 |
| AB000900201 | 60 | 10 | 6x40 | AR36P5V | 1 | 15.900 | 10 |


Figure 2



MOUNTED POINTS FOR STEEL - Cylindrical – Truncated Cone

| Article No. | Diameter (D) | Thickness (T) | Shaft (S _d x L ₂) | Specification | Figure | Max RPM (Lo=13 mm) | |
|-------------|--------------|---------------|--|---------------|--------|--------------------|----|
| AB000901003 | 20 | 65 | 6x40 | AR36/46P5V | 2 | 16.200 | 25 |

Figure 3



MOUNTED POINTS FOR STEEL - Truncated Cone


| Article No. | Diameter (D) | Thickness (T) | Shaft (S _d x L ₂) | Specification | Figure | Max RPM (Lo=13 mm) | |
|-------------|--------------|---------------|--|---------------|--------|--------------------|----|
| AB000901006 | 6 | 10 | 3x37 | AR60P5V | 3 | 93.100 | 50 |
| AB000901009 | 12 | 20 | 6x40 | AR60P5V | 3 | 79.500 | 25 |
| AB000901012 | 15 | 25 | 6x40 | AR46P5V | 3 | 60.400 | 25 |
| AB000901015 | 20 | 30 | 6x40 | AR46P5V | 3 | 38.900 | 25 |
| AB000901018 | 25 | 40 | 6x40 | AR36/46P5V | 3 | 23.300 | 10 |



Mounted Points for Steel

Figure 5


MOUNTED POINTS FOR STEEL - Round Nose Cone



| Article No. | Diameter (D) | Thickness (T) | Shaft (S _d x L ₂) | Specification | Figure | Max RPM (Lo=13 mm) | |
|-------------|--------------|---------------|--|---------------|--------|--------------------|----|
| AB000902003 | 6 | 10 | 3x37 | AR60P5V | 5 | 93.100 | 50 |
| AB000902006 | 10 | 15 | 3x37 | AR60P5V | 5 | 44.300 | 50 |
| AB000902009 | 10 | 20 | 6x40 | AR60P5V | 5 | 86.600 | 25 |
| AB000902012 | 15 | 30 | 6x40 | AR46P5V | 5 | 51.000 | 25 |
| AB000902015 | 16 | 45 | 6x40 | AR46P5V | 5 | 31.400 | 25 |
| AB000902018 | 20 | 28 | 6x40 | AR46P5V | 5 | 41.500 | 25 |
| AB000902021 | 20 | 40 | 6x40 | AR46P5V | 5 | 29.000 | 25 |
| AB000902024 | 25 | 70 | 6x40 | AR36/46P5V | 5 | 11.800 | 10 |
| AB000902027 | 30 | 50 | 6x40 | AR36/46P5V | 5 | 15.100 | 10 |
| AB000902030 | 32 | 32 | 6x40 | AR36P5V | 5 | 23.100 | 10 |

Figure 6


MOUNTED POINTS FOR STEEL - Cylindrical – Pointed Tree




| Article No. | Diameter (D) | Thickness (T) | Shaft (S _d x L ₂) | Specification | Figure | Max RPM (Lo=13 mm) | |
|-------------|--------------|---------------|--|---------------|--------|--------------------|----|
| AB000903003 | 8 | 16 | 3x37 | AR60P5V | 6 | 51.700 | 50 |
| AB000903006 | 10 | 20 | 3x37 | AR60P5V | 6 | 34.700 | 50 |
| AB000903009 | 8 | 16 | 6x40 | AR60P5V | 6 | 116.600 | 25 |
| AB000903012 | 10 | 20 | 6x40 | AR60P5V | 6 | 86.600 | 25 |
| AB000903015 | 13 | 20 | 6x40 | AR60P5V | 6 | 73.400 | 25 |
| AB000903018 | 18 | 30 | 6x40 | AR46P5V | 6 | 43.000 | 25 |
| AB000903021 | 20 | 50 | 6x40 | AR36/46P5V | 6 | 22.500 | 25 |
| AB000903024 | 21 | 45 | 6x40 | AR36/46P5V | 6 | 24.200 | 25 |
| AB000903027 | 22 | 70 | 6x40 | AR36/46P5V | 6 | 13.400 | 10 |
| AB000903030 | 30 | 50 | 6x40 | AR36/46P5V | 6 | 15.100 | 10 |

Figure 7


MOUNTED POINTS FOR STEEL - Cylindrical – Straight Cone



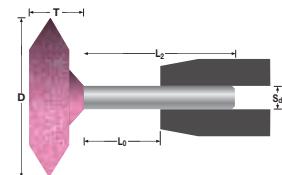
| Article No. | Diameter (D) | Thickness (T) | Shaft (S _d x L ₂) | Specification | Figure | Max RPM (Lo=13 mm) | |
|-------------|--------------|---------------|--|---------------|--------|--------------------|----|
| AB000904003 | 6 | 13 | 3x37 | AR60P5V | 7 | 77.800 | 50 |
| AB000904006 | 6 | 25 | 6x40 | AR60P5V | 7 | 100.700 | 25 |
| AB000904009 | 12 | 20 | 6x40 | AR60P5V | 7 | 79.500 | 25 |
| AB000904012 | 20 | 25 | 6x40 | AR46P5V | 7 | 46.100 | 25 |
| AB000904015 | 25 | 25 | 6x40 | AR36/46P5V | 7 | 37.200 | 25 |
| AB000904018 | 30 | 30 | 6x40 | AR36/46P5V | 7 | 26.200 | 25 |

Figure 8

MOUNTED POINTS FOR STEEL - Cylindrical with Radius End

| Article No. | Diameter (D) | Thickness (T) | Shaft (S _d x L ₂) | Specification | Figure | Max RPM (Lo=13 mm) | |
|-------------|--------------|---------------|--|---------------|--------|--------------------|----|
| AB000905003 | 6 | 20 | 6x40 | AR60P5V | 8 | 117.700 | 25 |
| AB000905006 | 20 | 25 | 6x40 | AR46P5V | 8 | 46.100 | 25 |
| AB000905009 | 25 | 25 | 6x40 | AR36/46P5V | 8 | 37.200 | 25 |
| AB000905012 | 30 | 50 | 6x40 | AR36/46P5V | 8 | 15.100 | 10 |
| AB000905015 | 40 | 40 | 6x40 | AR36P5V | 8 | 14.700 | 10 |

Figure 9

MOUNTED POINTS FOR STEEL - Ball

| Article No. | Diameter (D) | Thickness (T) | Shaft (S _d x L ₂) | Specification | Figure | Max RPM (Lo=13 mm) | |
|-------------|--------------|---------------|--|---------------|--------|--------------------|----|
| AB000906003 | 6 | 6 | 3x37 | AR60P5V | 9 | 124.900 | 50 |
| AB000906006 | 8 | 8 | 3x37 | AR60P5V | 9 | 84.800 | 50 |
| AB000906009 | 10 | 10 | 3x37 | AR60P5V | 9 | 60.100 | 50 |
| AB000906012 | 8 | 8 | 6x40 | AR60P5V | 9 | 119.300 | 25 |
| AB000906015 | 10 | 10 | 6x40 | AR60P5V | 9 | 95.400 | 25 |
| AB000906018 | 15 | 15 | 6x40 | AR60P5V | 9 | 63.600 | 25 |
| AB000906021 | 20 | 20 | 6x40 | AR46P5V | 9 | 47.700 | 25 |
| AB000906024 | 25 | 25 | 6x40 | AR36/46P5V | 9 | 37.200 | 25 |
| AB000906027 | 30 | 30 | 6x40 | AR36/46P5V | 9 | 26.200 | 25 |

Figure 11

MOUNTED POINTS FOR STEEL - Knife Shape


| Article No. | Diameter (D) | Thickness (T) | Shaft (S _d x L ₂) | Specification | Figure | Max RPM (Lo=13 mm) | |
|-------------|--------------|---------------|--|---------------|--------|--------------------|----|
| AB000907003 | 30 | 6 | 6x40 | AR60P5V | 11 | 31.800 | 25 |
| AB000907006 | 30 | 8 | 6x40 | AR60P5V | 11 | 31.800 | 25 |
| AB000907009 | 40 | 10 | 6x40 | AR36/46P5V | 11 | 23.800 | 25 |



Mounted Points for Steel

Figure 1


MOUNTED POINTS FOR STEEL - Cylindrical (long shaft)



| Article No. | Diameter (D) | Thickness (T) | Shaft (S _d x L ₂) | Specification | Figure | Max RPM (Lo=52 mm) | |
|-------------|--------------|---------------|--|---------------|--------|--------------------|----|
| AB000908003 | 8 | 20 | 6x80 | AR60P5V | 1 | 34.400 | 25 |
| AB000908006 | 10 | 15 | 6x80 | AR60P5V | 1 | 35.500 | 25 |
| AB000908009 | 10 | 30 | 6x80 | AR60P5V | 1 | 24.600 | 25 |
| AB000908012 | 12 | 15 | 6x80 | AR60P5V | 1 | 32.400 | 25 |
| AB000908015 | 15 | 15 | 6x80 | AR60P5V | 1 | 28.000 | 25 |
| AB000908018 | 15 | 30 | 6x80 | AR46P5V | 1 | 18.400 | 25 |
| AB000908021 | 20 | 30 | 6x80 | AR46P5V | 1 | 14.400 | 25 |

Figure 9

MOUNTED POINTS FOR STEEL - Ball (long shaft)



| Article No. | Diameter (D) | Thickness (T) | Shaft (S _d x L ₂) | Specification | Figure | Max RPM (Lo=52 mm) | |
|-------------|--------------|---------------|--|---------------|--------|--------------------|----|
| AB000908024 | 10 | 10 | 6x80 | AR60P5V | 9 | 41.200 | 25 |
| AB000908027 | 15 | 15 | 6x80 | AR60P5V | 9 | 28.000 | 25 |
| AB000908030 | 20 | 20 | 6x80 | AR46P5V | 9 | 19.000 | 25 |

The ground side surface guarantees the perfect concentricity of the shaft and an immediately ready-to-use mounted point, eliminating the need of dressing on the first use.





MOUNTED POINTS FOR STAINLESS STEEL





Mounted Points for Stainless Steel


APPLICATION

Universal use for heavy-duty machining operations of all types of stainless steels.

FEATURES

- Mixture of normal and white aluminium oxide
- Resin binder

RECOMMENDED USE



Straight grinder

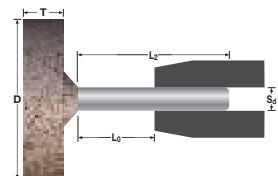


Figure 1

MOUNTED POINTS FOR STAINLESS STEEL - Cylindrical

| Article No. | Diameter (D) | Thickness (T) | Shaft (S _d x L ₂) | Specification | Figure | Max RPM (Lo=13 mm) | |
|-------------|--------------|---------------|--|---------------|--------|--------------------|----|
| AB000920003 | 10 | 20 | 6x40 | A/AB30Q5B | 1 | 86.600 | 25 |
| AB000920006 | 15 | 30 | 6x40 | A/AB30Q5B | 1 | 51.000 | 25 |
| AB000920009 | 20 | 20 | 6x40 | A/AB30Q5B | 1 | 47.700 | 25 |
| AB000920012 | 20 | 25 | 6x40 | A/AB30Q5B | 1 | 46.100 | 25 |
| AB000920015 | 20 | 30 | 6x40 | A/AB30Q5B | 1 | 38.900 | 25 |
| AB000920018 | 20 | 40 | 6x40 | A/AB30Q5B | 1 | 29.000 | 25 |
| AB000920021 | 25 | 25 | 6x40 | A/AB30Q5B | 1 | 37.200 | 25 |
| AB000920024 | 30 | 10 | 6x40 | A/AB30Q5B | 1 | 31.800 | 25 |
| AB000920027 | 30 | 30 | 6x40 | A/AB30Q5B | 1 | 26.200 | 25 |
| AB000920030 | 35 | 35 | 6x40 | A/AB30Q5B | 1 | 19.300 | 10 |
| AB000920033 | 40 | 10 | 6x40 | A/AB30Q5B | 1 | 23.800 | 25 |
| AB000920036 | 40 | 20 | 6x40 | A/AB30Q5B | 1 | 23.800 | 10 |
| AB000920039 | 50 | 10 | 6x40 | A/AB30Q5B | 1 | 19.000 | 10 |
| AB000920042 | 20 | 40 | 8x40 | A/AB30Q5B | 1 | 46.800 | 25 |
| AB000920045 | 30 | 40 | 8x40 | A/AB30Q5B | 1 | 31.800 | 10 |
| AB000920048 | 35 | 35 | 8x40 | A/AB30Q5B | 1 | 27.200 | 10 |
| AB000920051 | 40 | 40 | 8x40 | A/AB30Q5B | 1 | 23.800 | 10 |

Figure 5

MOUNTED POINTS FOR STAINLESS STEEL - Round Nose Cone

| Article No. | Diameter (D) | Thickness (T) | Shaft (S _d x L ₂) | Specification | Figure | Max RPM (Lo=13 mm) | |
|-------------|--------------|---------------|--|---------------|--------|--------------------|----|
| AB000920054 | 20 | 40 | 6x40 | A/AB30Q5B | 5 | 29.000 | 25 |





Figure 6

MOUNTED POINTS FOR STAINLESS STEEL - Cylindrical - Pointed Tree

| Article No. | Diameter (D) | Thickness (T) | Shaft (S _d x L ₂) | Specification | Figure | Max RPM (Lo=13 mm) | |
|-------------|--------------|---------------|--|---------------|--------|--------------------|----|
| AB000920057 | 20 | 30 | 6x40 | A/AB30Q5B | 6 | 38.900 | 25 |
| AB000920060 | 25 | 50 | 6x40 | A/AB30Q5B | 6 | 18.100 | 10 |





MOUNTED POINTS FOR CAST IRON





Mounted Points for Cast Iron


APPLICATION

Universal use for deburring cast iron parts.

CARATTERISTICHE

- Mixture of normal and pink aluminium oxide
- Vitrified binder

RECOMMENDED USE



Straight grinder

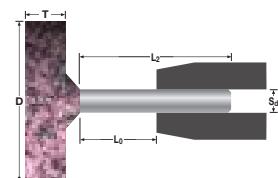


Figure 1

MOUNTED POINTS FOR CAST IRON - Cylindrical

| Article No. | Diameter (D) | Thickness (T) | Shaft (S _d x L ₂) | Specification | Figure | Max RPM (Lo=13 mm) | Box |
|-------------|--------------|---------------|--|---------------|--------|--------------------|-----|
| AB000940003 | 16 | 32 | 6x40 | A/AR24R5V | 1 | 45.100 | 25 |
| AB000940006 | 20 | 30 | 6x40 | A/AR24R5V | 1 | 38.900 | 25 |
| AB000940009 | 20 | 40 | 6x40 | A/AR24R5V | 1 | 29.000 | 25 |
| AB000940012 | 25 | 25 | 6x40 | A/AR24R5V | 1 | 37.200 | 25 |
| AB000940015 | 30 | 30 | 6x40 | A/AR24R5V | 1 | 26.200 | 25 |
| AB000940018 | 30 | 40 | 6x40 | A/AR24R5V | 1 | 19.500 | 10 |
| AB000940021 | 40 | 10 | 6x40 | A/AR24R5V | 1 | 23.800 | 25 |
| AB000940024 | 40 | 20 | 6x40 | A/AR24R5V | 1 | 23.800 | 10 |
| AB000940027 | 50 | 10 | 6x40 | A/AR24R5V | 1 | 19.000 | 10 |
| AB000940030 | 20 | 40 | 8x40 | A/AR24R5V | 1 | 46.800 | 25 |
| AB000940033 | 30 | 40 | 8x40 | A/AR24R5V | 1 | 31.800 | 10 |
| AB000940036 | 40 | 40 | 8x40 | A/AR24R5V | 1 | 23.800 | 10 |

Figure 5

MOUNTED POINTS FOR CAST IRON - Round Nose Cone

| Article No. | Diameter (D) | Thickness (T) | Shaft (S _d x L ₂) | Specification | Figure | Max RPM (Lo=13 mm) | Box |
|-------------|--------------|---------------|--|---------------|--------|--------------------|-----|
| AB000940039 | 20 | 40 | 6x40 | A/AR24R5V | 5 | 29.000 | 25 |





Figure 6

MOUNTED POINTS FOR CAST IRON - Cylindrical - Pointed Tree

| Article No. | Diameter (D) | Thickness (T) | Shaft (S _d x L ₂) | Specification | Figure | Max RPM (Lo=13 mm) | Box |
|-------------|--------------|---------------|--|---------------|--------|--------------------|-----|
| AB000940042 | 20 | 30 | 6x40 | A/AR24R5V | 6 | 38.900 | 25 |
| AB000940045 | 25 | 50 | 6x40 | A/AR24R5V | 6 | 18.100 | 10 |





SHOP

in Shop



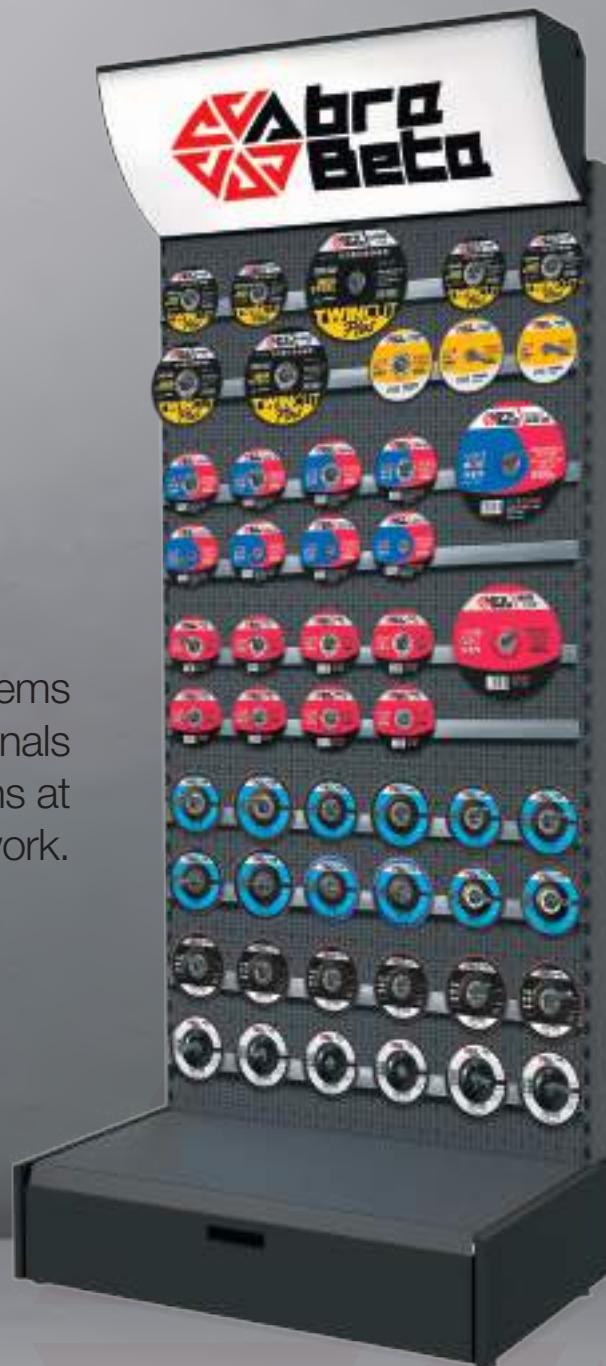
Abra Beta SHOP IN SHOP:




The new "**SHOP IN SHOP**" program includes dozens of assorted display modules containing several products from the Abra Beta catalogue.



dedicated to our partners




The accurate selection of items is designed to satisfy all professionals that always want the best solutions at hand for their work.




1.350



12



2




Selection Thinner Cutting Discs 115 mm



| Module Code | Description | |
|-------------|-------------|-------|
| AB008880101 | AM/101 | 1.350 |

| Article Code | Line | Specification | Diameter x thickness | Quantity |
|----------------|----------|---|----------------------|----------|
| 1 AB000330115 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 115 x 1,0 | 100 |
| 2 AB000330116 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 115 x 1,2 | 100 |
| 3 AB000330118 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 115 x 1,6 | 100 |
| 4 AB000300115 | Silver | Stainless Steel/Steel Twincut A46Q | 115 x 1,0 | 150 |
| 5 AB000300116 | Silver | Stainless Steel/Steel Twincut A46Q | 115 x 1,2 | 150 |
| 6 AB000300118 | Silver | Stainless Steel/Steel Twincut A46Q | 115 x 1,6 | 150 |
| 7 AB000010115 | Silver | Steel A36S | 115 x 1,0 | 100 |
| 8 AB000010119 | Silver | Steel A36S | 115 x 1,6 | 100 |
| 9 AB000200115 | Silver | Stainless Steel A36N | 115 x 1,0 | 100 |
| 10 AB000200118 | Silver | Stainless Steel A36N | 115 x 1,6 | 100 |
| 11 AB000400115 | Diamond | Aluminium A30N | 115 x 1,6 | 100 |
| 12 AB000500115 | Silver | Stone C36S | 115 x 1,6 | 100 |




1.150



12



2





Selection Thinner Cutting Discs 125 mm




| Module Code | Description | |
|-------------|-------------|-------|
| AB008880102 | AM/102 | 1.150 |

| Article Code | Line | Specification | Diameter x thickness | Quantity | Quantità |
|----------------|------|---------------|---|-----------|----------|
| 1 AB000330125 | | Platinum | Stainless Steel/Steel Twincut Plus A46U | 125 x 1,0 | 100 |
| 2 AB000330126 | | Platinum | Stainless Steel/Steel Twincut Plus A46U | 125 x 1,2 | 100 |
| 3 AB000330128 | | Platinum | Stainless Steel/Steel Twincut Plus A46U | 125 x 1,6 | 100 |
| 4 AB000300125 | | Silver | Stainless Steel/Steel Twincut A46Q | 125 x 1,0 | 100 |
| 5 AB000300126 | | Silver | Stainless Steel/Steel Twincut A46Q | 125 x 1,2 | 100 |
| 6 AB000300128 | | Silver | Stainless Steel/Steel Twincut A46Q | 125 x 1,6 | 100 |
| 7 AB000010125 | | Silver | Steel A36S | 125 x 1,0 | 100 |
| 8 AB000010129 | | Silver | Steel A36S | 125 x 1,6 | 100 |
| 9 AB000200125 | | Silver | Stainless Steel A36N | 125 x 1,0 | 100 |
| 10 AB000200128 | | Silver | Stainless Steel A36N | 125 x 1,6 | 100 |
| 11 AB000400125 | | Diamond | Aluminium A30N | 125 x 1,6 | 100 |
| 12 AB000100125 | | Platinum | Zirconia ZA46T | 125 x 1,6 | 50 |

**1.050****9****2**



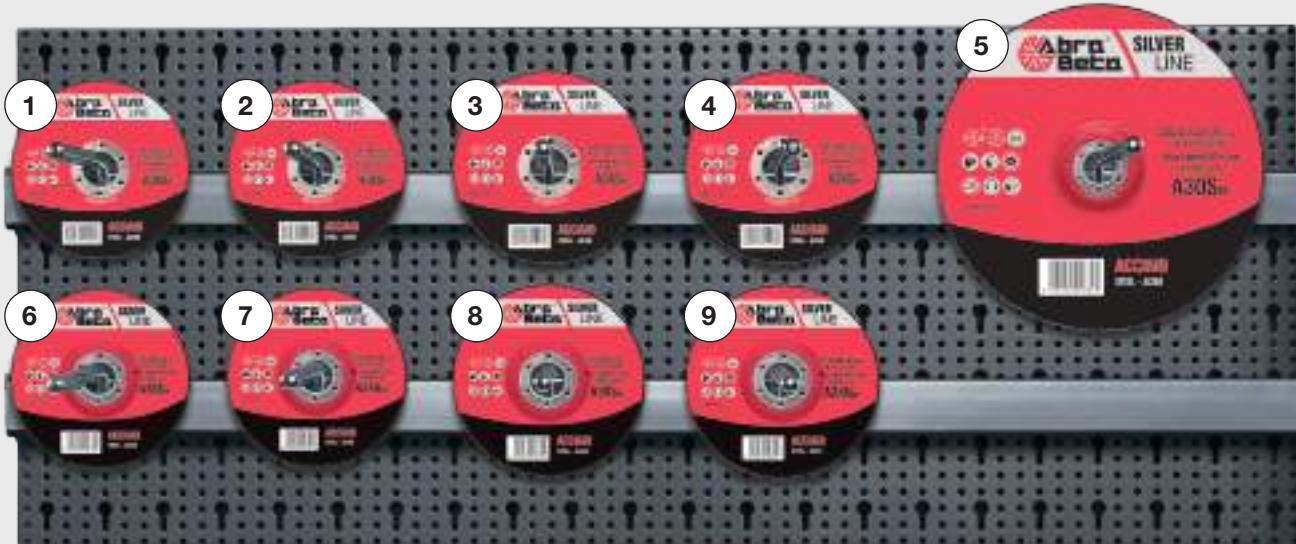
Selection Cutting & Grinding Discs for Steel



| Module Code | Description | |
|-------------|-------------|--|
| AB008880103 | AM/103 | |

| Article Code | Line | Specification | Diameter x thickness | Quantity |
|---------------|--------|---------------|----------------------|----------|
| 1 AB000010115 | Silver | Steel A36S | 115 x 1,0 | 200 |
| 2 AB000010119 | Silver | Steel A36S | 115 x 1,6 | 200 |
| 3 AB000010125 | Silver | Steel A36S | 125 x 1,0 | 150 |
| 4 AB000010129 | Silver | Steel A36S | 125 x 1,6 | 150 |
| 5 AB000050230 | Silver | Steel A30S | 230 x 3,2 | 50 |
| 6 AB000050115 | Silver | Steel A30S | 115 x 3,2 | 100 |
| 7 AB000070118 | Silver | Steel A24N | 115 x 6,5 | 50 |
| 8 AB000050125 | Silver | Steel A30S | 125 x 3,2 | 100 |
| 9 AB000070128 | Silver | Steel A24N | 125 x 6,5 | 50 |







Selection Cutting & Grinding Discs




| Module Code | Description | |
|-------------|-------------|-----|
| AB008880104 | AM/104 | 925 |

| Article Code | Line | Specification | Diameter x thickness | Quantity |
|----------------|----------|---|----------------------|----------|
| 1 AB000330115 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 115 x 1,0 | 200 |
| 2 AB000330118 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 115 x 1,6 | 200 |
| 3 AB000330230 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 230 x 2,0 | 50 |
| 4 AB000330125 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 125 x 1,0 | 100 |
| 5 AB000330128 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 125 x 1,6 | 100 |
| 6 AB000330150 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 150 x 1,6 | 50 |
| 7 AB000330180 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 180 x 2,0 | 25 |
| 8 AB000400125 | Diamond | Aluminium A30N | 125 x 1,6 | 100 |
| 9 AB000460125 | Diamond | Aluminium A30N | 125 x 6,5 | 50 |
| 10 AB000460115 | Diamond | Aluminium A30N | 115 x 6,5 | 50 |

**1.050****9****2**



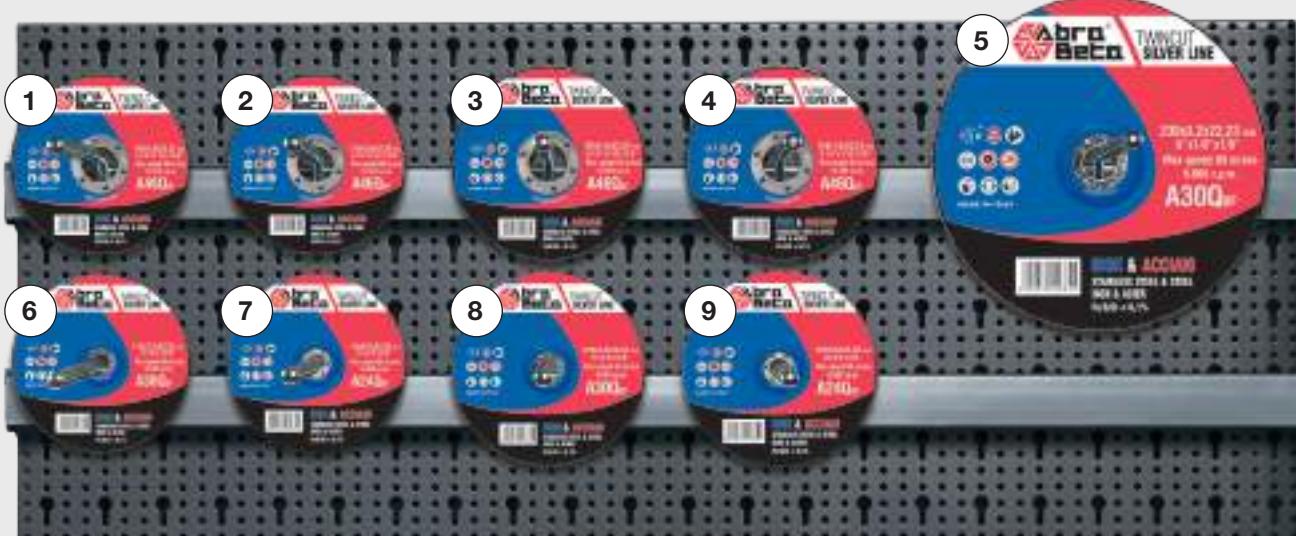
Selection Cutting & Grinding Discs



| Module Code | Description | |
|-------------|-------------|-------|
| AB008880105 | AM/105 | 1.050 |

| Article Code | Line | Specification | Diameter x thickness | Quantity |
|---------------|--------|------------------------------------|----------------------|----------|
| 1 AB000300115 | Silver | Stainless Steel/Steel Twincut A46Q | 115 x 1,0 | 200 |
| 2 AB000300118 | Silver | Stainless Steel/Steel Twincut A46Q | 115 x 1,6 | 200 |
| 3 AB000300125 | Silver | Stainless Steel/Steel Twincut A46Q | 125 x 1,0 | 150 |
| 4 AB000300128 | Silver | Stainless Steel/Steel Twincut A46Q | 125 x 1,6 | 150 |
| 5 AB000370230 | Silver | Stainless Steel/Steel Twincut A30Q | 230 x 3,2 | 50 |
| 6 AB000370115 | Silver | Stainless Steel/Steel Twincut A30Q | 115 x 3,2 | 100 |
| 7 AB000380115 | Silver | Stainless Steel/Steel Twincut A24Q | 115 x 6,5 | 50 |
| 8 AB000370125 | Silver | Stainless Steel/Steel Twincut A30Q | 125 x 3,2 | 100 |
| 9 AB000380125 | Silver | Stainless Steel/Steel Twincut A24Q | 125 x 6,5 | 50 |







Selection Thinner Cutting Discs 230 mm



| Module Code | Description | |
|-------------|-------------|-----|
| AB008880106 | AM/106 | 450 |

| Article Code | Line | Specification | Diameter x thickness | Quantity |
|---------------|----------|---|----------------------|----------|
| 1 AB000010230 | Silver | Steel A30S | 230 x 2,0 | 150 |
| 2 AB000300230 | Silver | Stainless Steel/Steel Twincut A36Q | 230 x 2,0 | 150 |
| 3 AB000330230 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 230 x 2,0 | 150 |




400



3



1





Selection Cutting Discs 230 mm



| Module Code | Description | |
|-------------|-------------|-----|
| AB008880107 | AM/107 | 400 |

| Article Code | Line | Specification | Diameter x thickness | Quantity |
|---------------|----------|---|----------------------|----------|
| 1 AB000050230 | Silver | Steel A30S | 230 x 3,2 | 150 |
| 2 AB000370230 | Silver | Stainless Steel/Steel Twincut A30Q | 230 x 3,2 | 100 |
| 3 AB000340230 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 230 x 2,0 | 150 |





Selection Grinding Discs 230 mm



| Module Code | Description | |
|-------------|-------------|-----|
| AB008880108 | AM/108 | 225 |

| Article Code | Line | Specification | Diameter x thickness | Quantity |
|---------------|----------|------------------------------------|----------------------|----------|
| 1 AB000070236 | Silver | Steel A24N | 230 x 6,5 | 100 |
| 2 AB000380230 | Silver | Stainless Steel/Steel Twincut A24Q | 230 x 6,5 | 75 |
| 3 AB000120236 | Platinum | Zirconia ZA24R | 230 x 7,0 | 50 |




970



10





2



Selection Cutting Discs and Flap Discs (Fiber backing pad)



| Module Code | Description | | | |
|----------------|-------------|------------------------------------|----------------------|----------|
| AB008880109 | AM/109 | | | 970 |
| Article Code | Line | Specification | Diameter x thickness | Quantity |
| 1 AB000300115 | Silver | Stainless Steel/Steel Twincut A46Q | 115 x 1,0 | 200 |
| 2 AB000300118 | Silver | Stainless Steel/Steel Twincut A46Q | 115 x 1,6 | 200 |
| 3 AB000300125 | Silver | Stainless Steel/Steel Twincut A46Q | 125 x 1,0 | 150 |
| 4 AB000300128 | Silver | Stainless Steel/Steel Twincut A46Q | 125 x 1,6 | 150 |
| 5 AB000300230 | Silver | Stainless Steel/Steel Twincut A46Q | 230 x 2,0 | 50 |
| 6 AB001010304 | Silver | Fiber 1-1 GR40 | 115 Zirconia | 60 |
| 7 AB001010306 | Silver | Fiber 1-1 GR60 | 115 Zirconia | 40 |
| 8 AB001010308 | Silver | Fiber 1-1 GR80 | 115 Zirconia | 40 |
| 9 AB001010312 | Silver | Fibra 1-1 GR120 | 115 Zirconia | 20 |
| 10 AB001010804 | Silver | Fiber 1-1 GR40 | 115 Zirconia Bigger | 60 |




970




10





2



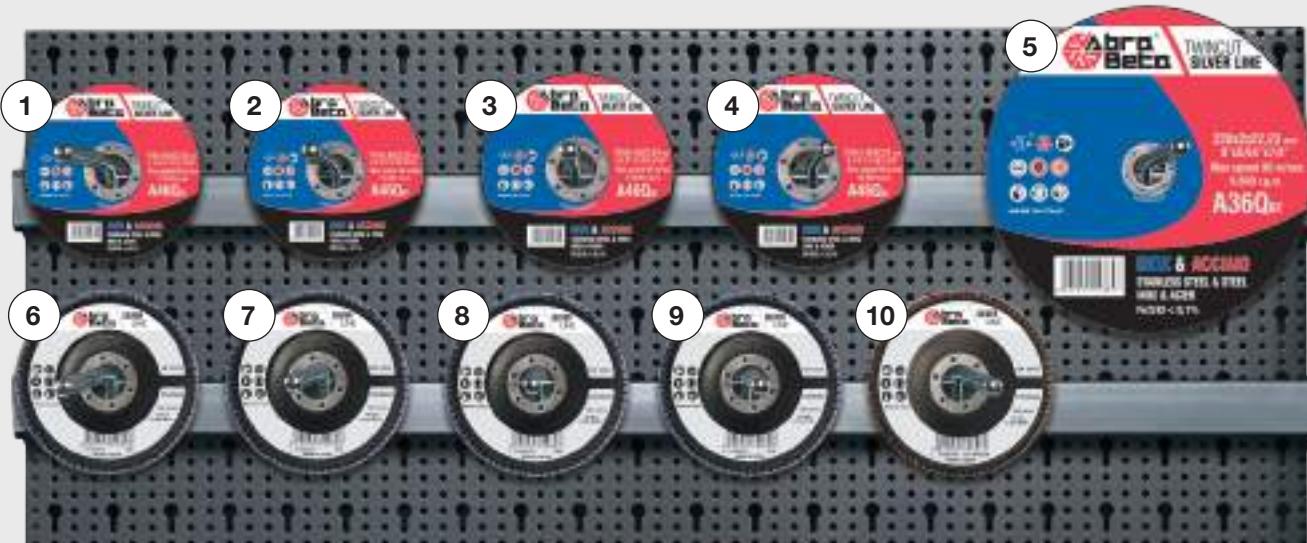Selection Cutting Discs and Flap Discs (Fiber backing pad)



| Module Code | Description | | | | |
|-------------|--------------|--------|------------------------------------|----------------------|----------|
| AB008880110 | AM/110 | | | 970 | |
| | Article Code | Line | Specification | Diameter x thickness | Quantity |
| 1 | AB000300115 | Silver | Stainless Steel/Steel Twincut A46Q | 115 x 1,0 | 200 |
| 2 | AB000300118 | Silver | Stainless Steel/Steel Twincut A46Q | 115 x 1,6 | 200 |
| 3 | AB000300125 | Silver | Stainless Steel/Steel Twincut A46Q | 125 x 1,0 | 150 |
| 4 | AB000300128 | Silver | Stainless Steel/Steel Twincut A46Q | 125 x 1,6 | 150 |
| 5 | AB000300230 | Silver | Stainless Steel/Steel Twincut A36Q | 230 x 2,0 | 50 |
| 6 | AB001010404 | Silver | Fiber 1-1 GR40 | 125 Zirconia | 60 |
| 7 | AB001010406 | Silver | Fiber 1-1 GR60 | 125 Zirconia | 40 |
| 8 | AB001010408 | Silver | Fiber 1-1 GR80 | 125 Zirconia | 40 |
| 9 | AB001010412 | Silver | Fiber 1-1 GR120 | 125 Zirconia | 20 |
| 10 | AB001010854 | Silver | Fiber 1-1 GR40 | 125 Zirconia Bigger | 60 |




950



10





2



Selection Cutting Discs and Flap Discs (Nylon backing pad)




| Module Code | Description | | | | |
|-------------|--------------|--------|------------------------------------|----------------------|----------|
| AB008880111 | AM/111 | | | 950 | |
| | Article Code | Line | Specification | Diameter x thickness | Quantity |
| 1 | AB000300115 | Silver | Stainless Steel/Steel Twincut A46Q | 115 x 1,0 | 200 |
| 2 | AB000300118 | Silver | Stainless Steel/Steel Twincut A46Q | 115 x 1,6 | 200 |
| 3 | AB000300125 | Silver | Stainless Steel/Steel Twincut A46Q | 125 x 1,0 | 150 |
| 4 | AB000300128 | Silver | Stainless Steel/Steel Twincut A46Q | 125 x 1,6 | 150 |
| 5 | AB000300230 | Silver | Stainless Steel/Steel Twincut A36Q | 230 x 2,0 | 50 |
| 6 | AB001010024 | Silver | Nylon 2-2 GR40 | 115 Zirconia | 60 |
| 7 | AB001010026 | Silver | Nylon 2-2 GR60 | 115 Zirconia | 40 |
| 8 | AB001010028 | Silver | Nylon 2-2 GR80 | 115 Zirconia | 40 |
| 9 | AB001010032 | Silver | Nylon 2-2 GR120 | 115 Zirconia | 20 |
| 10 | AB001110024 | Silver | Nylon 2-2 GR40 | 115 Aluminium Oxide | 40 |




950



10



2





Selection Cutting Discs and Flap Discs (Nylon backing pad)



| Module Code | Description | |
|-------------|-------------|-----|
| AB008880112 | AM/112 | 950 |

| Article Code | Line | Specification | Diameter x thickness | Quantity |
|----------------|--------|------------------------------------|----------------------|----------|
| 1 AB000300115 | Silver | Stainless Steel/Steel Twincut A46Q | 115 x 1,0 | 200 |
| 2 AB000300118 | Silver | Stainless Steel/Steel Twincut A46Q | 115 x 1,6 | 200 |
| 3 AB000300125 | Silver | Stainless Steel/Steel Twincut A46Q | 125 x 1,0 | 150 |
| 4 AB000300128 | Silver | Stainless Steel/Steel Twincut A46Q | 125 x 1,6 | 150 |
| 5 AB000300230 | Silver | Stainless Steel/Steel Twincut A36Q | 230 x 2,0 | 50 |
| 6 AB001010124 | Silver | Nylon 2-2 GR40 | 125 Zirconia | 60 |
| 7 AB001010126 | Silver | Nylon 2-2 GR60 | 125 Zirconia | 40 |
| 8 AB001010128 | Silver | Nylon 2-2 GR80 | 125 Zirconia | 40 |
| 9 AB001110124 | Silver | Nylon 2-2 GR40 | 125 Aluminium Oxide | 40 |
| 10 AB001110126 | Silver | Nylon 2-2 GR60 | 125 Aluminium Oxide | 20 |




970



10




2



Selection Cutting Discs and Flap Discs (Fiber backing pad)



| Module Code | Description | | | |
|----------------|-------------|---|----------------------|----------|
| | AM/113 | | | 970 |
| Article Code | Line | Specification | Diameter x thickness | Quantity |
| 1 AB000330115 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 115 x 1,0 | 200 |
| 2 AB000330118 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 115 x 1,6 | 200 |
| 3 AB000330125 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 125 x 1,0 | 150 |
| 4 AB000330128 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 125 x 1,6 | 150 |
| 5 AB000330230 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 230 x 2,0 | 50 |
| 6 AB001050304 | Platinum | Fiber 1-1 GR40 | 115 Zirconia | 60 |
| 7 AB001050306 | Platinum | Fiber 1-1 GR60 | 115 Zirconia | 40 |
| 8 AB001050308 | Platinum | Fiber 1-1 GR80 | 115 Zirconia | 40 |
| 9 AB001050312 | Platinum | Fiber 1-1 GR120 | 115 Zirconia | 20 |
| 10 AB001010804 | Silver | Fiber 1-1 GR40 | 115 Zirconia Bigger | 60 |




950



10




2



Selection Cutting Discs and Flap Discs (Fiber backing pad)



| Module Code | Description | | | | |
|-------------|--------------|----------|---|----------------------|----------|
| AB008880114 | AM/114 | | | | 950 |
| | Article Code | Line | Specification | Diameter x thickness | Quantity |
| 1 | AB000330115 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 115 x 1,0 | 200 |
| 2 | AB000330118 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 115 x 1,6 | 200 |
| 3 | AB000330125 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 125 x 1,0 | 150 |
| 4 | AB000330128 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 125 x 1,6 | 150 |
| 5 | AB000330230 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 230 x 2,0 | 50 |
| 6 | AB001050404 | Platinum | Fiber 1-1 GR40 | 125 Zirconia | 60 |
| 7 | AB001050406 | Platinum | Fiber 1-1 GR60 | 125 Zirconia | 40 |
| 8 | AB001050408 | Platinum | Fiber 1-1 GR80 | 125 Zirconia | 40 |
| 9 | AB001050412 | Platinum | Fiber 1-1 GR120 | 125 Zirconia | 20 |
| 10 | AB001120104 | Platinum | Fiber 1-1 GR40 | 125 Aluminium Oxide | 40 |




970



10




2



Selection Cutting Discs and Flap Discs (Nylon backing pad)



| Module Code | Description | | | |
|----------------|-------------|---|----------------------|----------|
| AB008880115 | AM/115 | | | 970 |
| Article Code | Line | Specification | Diameter x thickness | Quantity |
| 1 AB000330115 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 115 x 1,0 | 200 |
| 2 AB000330118 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 115 x 1,6 | 200 |
| 3 AB000330125 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 125 x 1,0 | 150 |
| 4 AB000330128 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 125 x 1,6 | 150 |
| 5 AB000330230 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 230 x 2,0 | 50 |
| 6 AB001050024 | Platinum | Nylon 2-2 GR40 | 115 Zirconia | 60 |
| 7 AB001050026 | Platinum | Nylon 2-2 GR60 | 115 Zirconia | 40 |
| 8 AB001050028 | Platinum | Nylon 2-2 GR80 | 115 Zirconia | 40 |
| 9 AB001050032 | Platinum | Nylon 2-2 GR120 | 115 Zirconia | 20 |
| 10 AB001070324 | Platinum | Reinforced Nylon 2-2 GR40 | 115 Zirconia | 60 |




950



10



2




Selection Cutting Discs and Flap Discs (Nylon backing pad)



| Module Code | Description | |
|-------------|-------------|--|
| AB008880116 | AM/116 | |

| Article Code | Line | Specification | Diameter x thickness | Quantity |
|----------------|----------|---|----------------------|----------|
| 1 AB000330115 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 115 x 1,0 | 200 |
| 2 AB000330118 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 115 x 1,6 | 200 |
| 3 AB000330125 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 125 x 1,0 | 150 |
| 4 AB000330128 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 125 x 1,6 | 150 |
| 5 AB000330230 | Platinum | Stainless Steel/Steel Twincut Plus A46U | 230 x 2,0 | 50 |
| 6 AB001050124 | Platinum | Nylon 2-2 GR40 | 125 Zirconia | 60 |
| 7 AB001050126 | Platinum | Nylon 2-2 GR60 | 125 Zirconia | 40 |
| 8 AB001050128 | Platinum | Nylon 2-2 GR80 | 125 Zirconia | 40 |
| 9 AB001140104 | Diamond | Nylon 1-1 GR40 | 125 Ceramic-Zirconia | 40 |
| 10 AB001140106 | Diamond | Nylon 1-1 GR60 | 125 Ceramic-Zirconia | 20 |




540




12




2



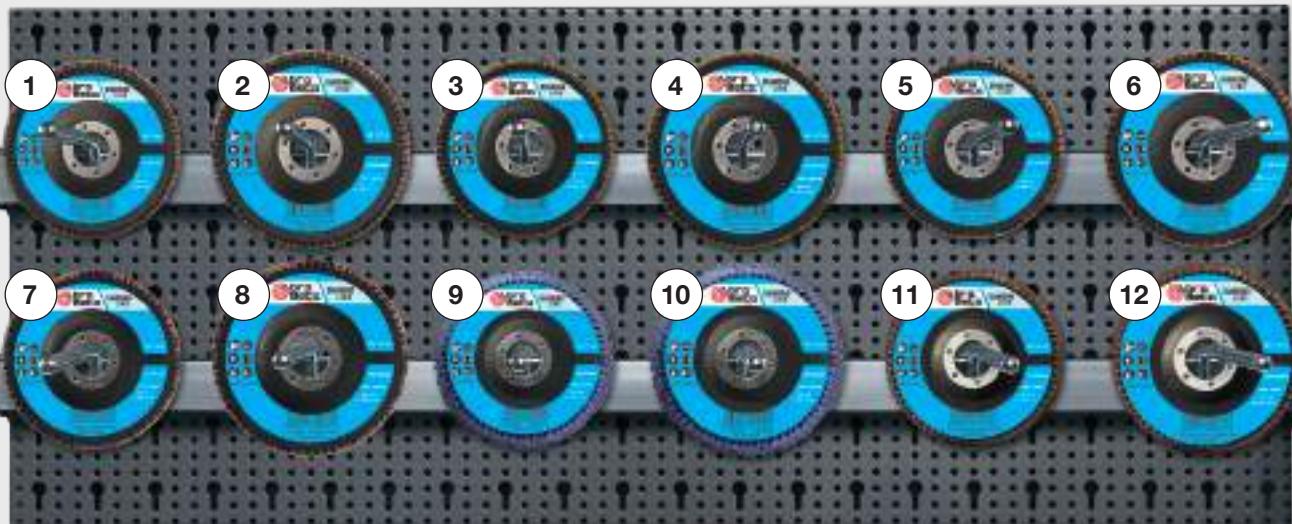Selection Diamond Flap Discs (Fiber backing pad)



| Module Code | Description | | | | | |
|-------------|--------------|------|---------------|----------------------|------------------------------|----|
| | Article Code | Line | Specification | Diameter x thickness | Quantity | |
| 1 | AB001090004 | | Diamond | Fiber 1-1 GR40 | 115 Zirconia Bigger | 60 |
| 2 | AB001090104 | | Diamond | Fiber 1-1 GR40 | 125 Zirconia Bigger | 60 |
| 3 | AB001141004 | | Diamond | Fiber 1-1 GR40 | 115 Ceramic-Zirconia | 40 |
| 4 | AB001141104 | | Diamond | Fiber 1-1 GR40 | 125 Ceramic-Zirconia | 40 |
| 5 | AB001151004 | | Diamond | Fiber 1-1 GR40 | 115 Ceramic | 60 |
| 6 | AB001151104 | | Diamond | Fiber 1-1 GR40 | 125 Ceramic | 60 |
| 7 | AB001160004 | | Diamond | Fiber 1-1 GR40 | 115 Stearate aluminium oxyde | 40 |
| 8 | AB001160104 | | Diamond | Fiber 1-1 GR40 | 125 Stearate aluminium oxyde | 40 |
| 9 | AB001080004 | | Diamond | Fiber 1-1 GR40 | 115 Soft zirconia | 40 |
| 10 | AB001080104 | | Diamond | Fiber 1-1 GR40 | 125 Soft zirconia | 40 |
| 11 | AB001080504 | | Diamond | Fiber 1-1 GR40 | 115 Soft ceramic | 40 |
| 12 | AB001080604 | | Diamond | Fiber 1-1 GR40 | 125 Soft ceramic | 20 |




760




12



2




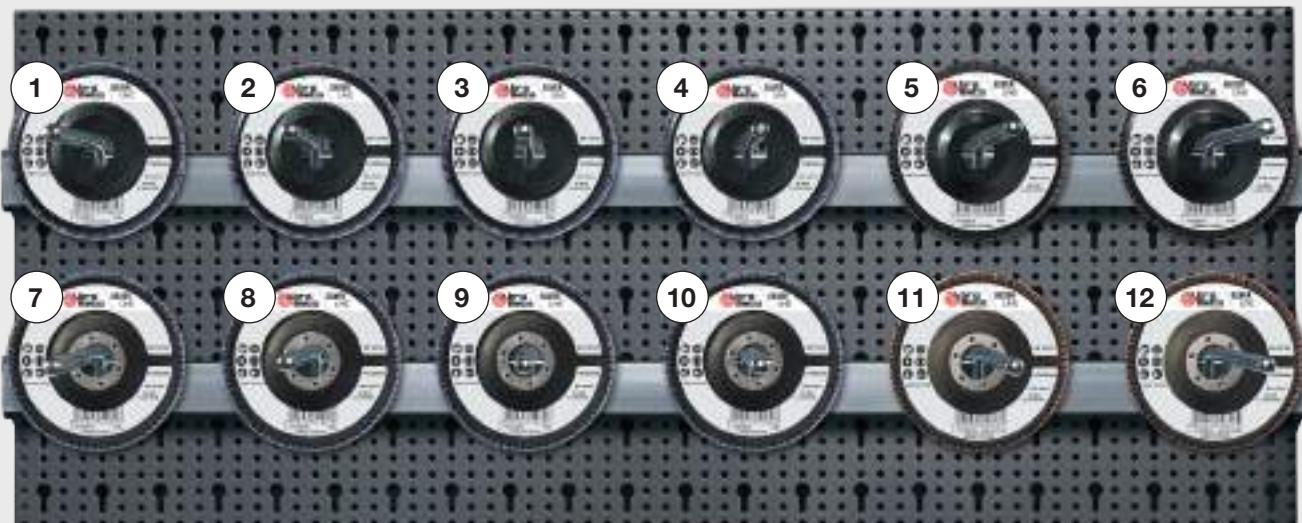Selection Silver Flap Discs 115 mm (Fiber/Nylon backing pad)



| Module Code | Description | |
|-------------|-------------|--|
| AB008880118 | AM/118 | |

| Article Code | Line | Specification | Diameter x thickness | Quantity |
|----------------|--------|-----------------|----------------------|----------|
| 1 AB001010024 | Silver | Nylon 2-2 GR40 | 115 Zirconia | 100 |
| 2 AB001010026 | Silver | Nylon 2-2 GR60 | 115 Zirconia | 60 |
| 3 AB001010028 | Silver | Nylon 2-2 GR80 | 115 Zirconia | 40 |
| 4 AB001010032 | Silver | Nylon 2-2 GR120 | 115 Zirconia | 20 |
| 5 AB001110004 | Silver | Nylon 1-1 GR40 | 115 Aluminium Oxide | 100 |
| 6 AB001110006 | Silver | Nylon 1-1 GR60 | 115 Aluminium Oxide | 60 |
| 7 AB001010304 | Silver | Fiber 1-1 GR40 | 115 Zirconia | 100 |
| 8 AB001010306 | Silver | Fiber 1-1 GR60 | 115 Zirconia | 60 |
| 9 AB001010308 | Silver | Fiber 1-1 GR80 | 115 Zirconia | 40 |
| 10 AB001010312 | Silver | Fiber 1-1 GR120 | 115 Zirconia | 20 |
| 11 AB001010804 | Silver | Fiber 1-1 GR40 | 115 Zirconia Bigger | 100 |
| 12 AB001010806 | Silver | Fiber 1-1 GR60 | 115 Zirconia Bigger | 60 |




780




12





2



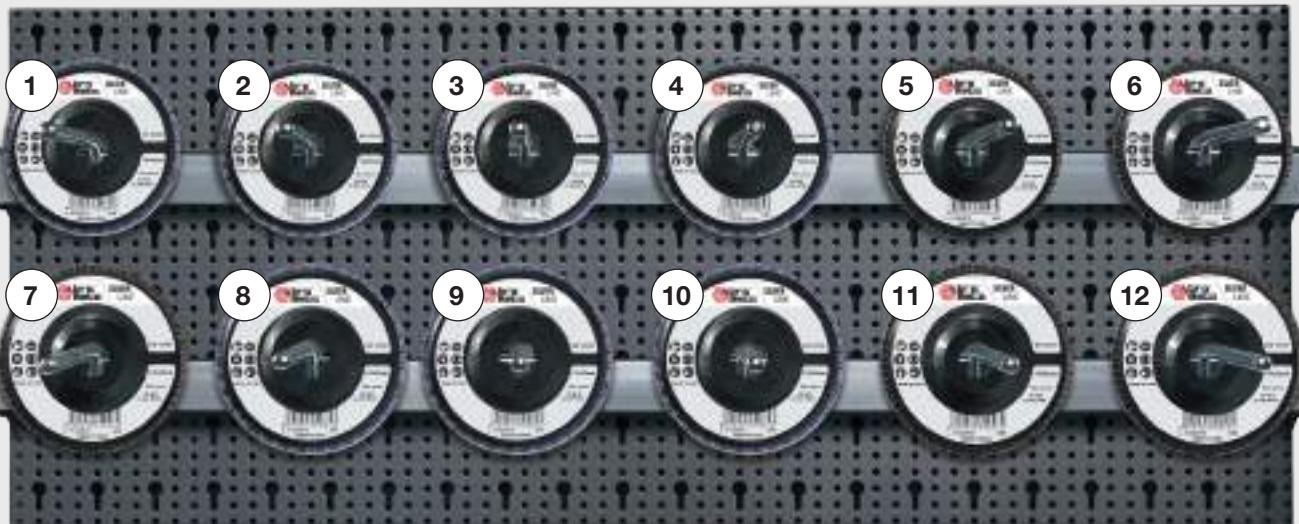
Selection Silver Flap Discs 115/125 mm (Nylon backing pad)



| Module Code | Description | | | |
|-------------|--------------|--------|-----------------|-------------------------|
| AB008880119 | AM/119 | | | 780 |
| | Article Code | Line | Specification | Diameter x thickness |
| 1 | AB001010024 | Silver | Nylon 2-2 GR40 | 115 Zirconia 100 |
| 2 | AB001010026 | Silver | Nylon 2-2 GR60 | 115 Zirconia 60 |
| 3 | AB001010028 | Silver | Nylon 2-2 GR80 | 115 Zirconia 40 |
| 4 | AB001010032 | Silver | Nylon 2-2 GR120 | 115 Zirconia 20 |
| 5 | AB001110004 | Silver | Nylon 1-1 GR40 | 115 Aluminium Oxide 100 |
| 6 | AB001110006 | Silver | Nylon 1-1 GR60 | 115 Aluminium Oxide 60 |
| 7 | AB001110008 | Silver | Nylon 1-1 GR80 | 115 Aluminium Oxide 40 |
| 8 | AB001010124 | Silver | Nylon 2-2 GR40 | 125 Zirconia 100 |
| 9 | AB001010126 | Silver | Nylon 2-2 GR60 | 125 Zirconia 60 |
| 10 | AB001010128 | Silver | Nylon 2-2 GR80 | 125 Zirconia 40 |
| 11 | AB001110104 | Silver | Nylon 1-1 GR40 | 125 Aluminium Oxide 100 |
| 12 | AB001110106 | Silver | Nylon 1-1 GR60 | 125 Aluminium Oxide 60 |





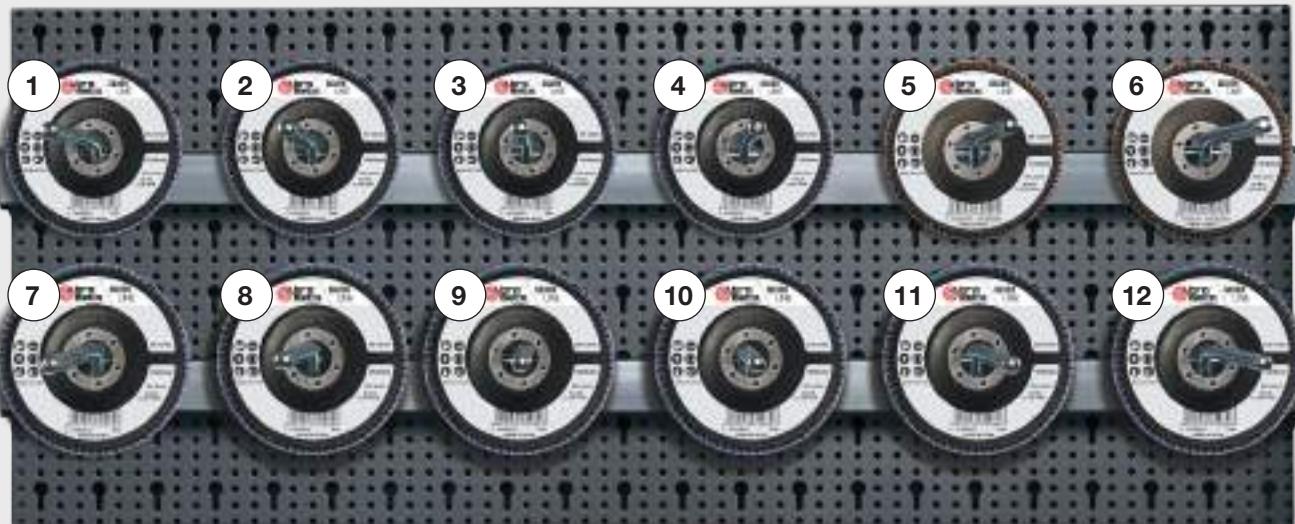Selection Silver Flap Discs 115/125 mm (Fiber backing pad)



| Module Code | Description | |
|-------------|-------------|--|
| AB008880120 | AM/120 | |

| Article Code | Line | Specification | Diameter x thickness | Quantity |
|----------------|--------|-----------------|----------------------|----------|
| 1 AB001010304 | Silver | Fiber 1-1 GR40 | 115 Zirconia | 100 |
| 2 AB001010306 | Silver | Fiber 1-1 GR60 | 115 Zirconia | 60 |
| 3 AB001010308 | Silver | Fiber 1-1 GR80 | 115 Zirconia | 40 |
| 4 AB001010312 | Silver | Fiber 1-1 GR120 | 115 Zirconia | 20 |
| 5 AB001010804 | Silver | Fiber 1-1 GR40 | 115 Zirconia Bigger | 100 |
| 6 AB001010806 | Silver | Fiber 1-1 GR60 | 115 Zirconia Bigger | 60 |
| 7 AB001010404 | Silver | Fiber 1-1 GR40 | 125 Zirconia | 100 |
| 8 AB001010406 | Silver | Fiber 1-1 GR60 | 125 Zirconia | 60 |
| 9 AB001010408 | Silver | Fiber 1-1 GR80 | 125 Zirconia | 40 |
| 10 AB001010412 | Silver | Fiber 1-1 GR120 | 125 Zirconia | 20 |
| 11 AB001010424 | Silver | Fiber 2-2 GR40 | 125 Zirconia | 100 |
| 12 AB001010426 | Silver | Fiber 2-2 GR60 | 125 Zirconia | 60 |







Selection Platinum Flap Discs 115 mm (Fiber/Nylon backing pad)




| Module Code | Description | |
|-------------|-------------|--|
| AB008880121 | AM/121 | |

| Article Code | Line | Specification | Diameter x thickness | Quantity |
|----------------|----------|---------------------------|----------------------|----------|
| 1 AB001050024 | Platinum | Nylon 2-2 GR40 | 115 Zirconia | 100 |
| 2 AB001050026 | Platinum | Nylon 2-2 GR60 | 115 Zirconia | 60 |
| 3 AB001050028 | Platinum | Nylon 2-2 GR80 | 115 Zirconia | 40 |
| 4 AB001050032 | Platinum | Nylon 2-2 GR120 | 115 Zirconia | 20 |
| 5 AB001070324 | Platinum | Reinforced Nylon 2-2 GR40 | 115 Zirconia | 60 |
| 6 AB001070326 | Platinum | Reinforced Nylon 2-2 GR60 | 115 Zirconia | 40 |
| 7 AB001050304 | Platinum | Fiber 1-1 GR40 | 115 Zirconia | 100 |
| 8 AB001050306 | Platinum | Fiber 1-1 GR60 | 115 Zirconia | 60 |
| 9 AB001050308 | Platinum | Fiber 1-1 GR80 | 115 Zirconia | 40 |
| 10 AB001050312 | Platinum | Fiber 1-1 GR120 | 115 Zirconia | 20 |
| 11 AB001120004 | Platinum | Fiber 1-1 GR40 | 115 Aluminium Oxide | 60 |
| 12 AB001120006 | Platinum | Fiber 1-1 GR60 | 115 Aluminium Oxide | 40 |




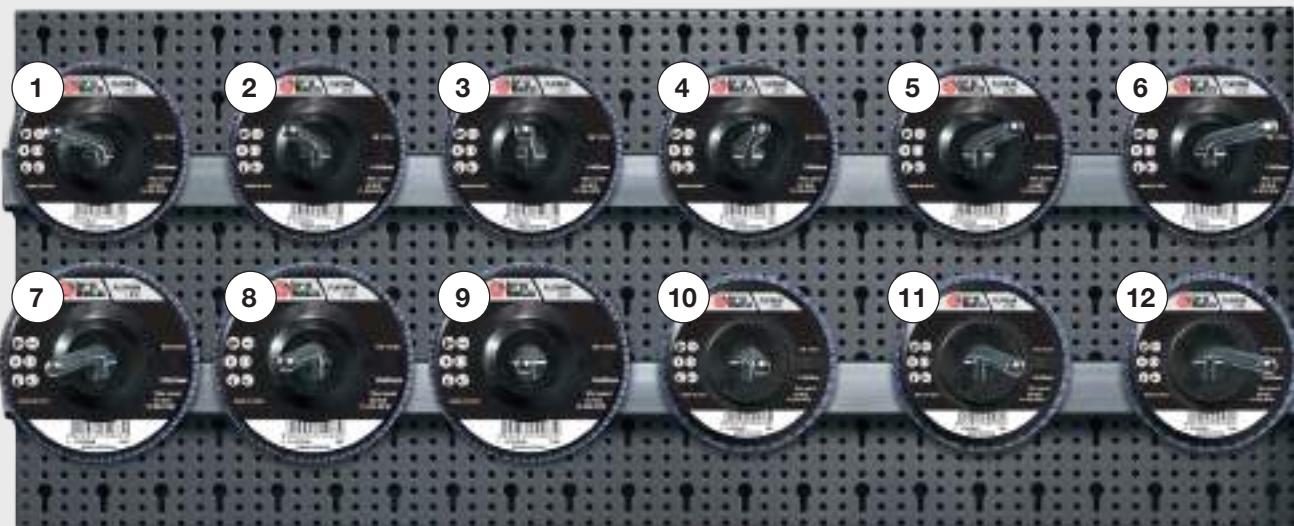Selection Platinum Flap Discs 115/125 mm (Nylon backing pad)



| Module Code | Description | |
|-------------|-------------|--|
| AB008880122 | AM/122 | |

| Article Code | Line | Specification | Diameter x thickness | Quantity |
|----------------|----------|---------------------------|----------------------|----------|
| 1 AB001050024 | Platinum | Nylon 2-2 GR40 | 115 Zirconia | 100 |
| 2 AB001050026 | Platinum | Nylon 2-2 GR60 | 115 Zirconia | 60 |
| 3 AB001050028 | Platinum | Nylon 2-2 GR80 | 115 Zirconia | 40 |
| 4 AB001050032 | Platinum | Nylon 2-2 GR120 | 115 Zirconia | 20 |
| 5 AB001050004 | Platinum | Nylon 1-1 GR40 | 115 Zirconia | 60 |
| 6 AB001050006 | Platinum | Nylon 1-1 GR60 | 115 Zirconia | 40 |
| 7 AB001050124 | Platinum | Nylon 2-2 GR40 | 125 Zirconia | 100 |
| 8 AB001050126 | Platinum | Nylon 2-2 GR60 | 125 Zirconia | 60 |
| 9 AB001050128 | Platinum | Nylon 2-2 GR80 | 125 Zirconia | 40 |
| 10 AB001070324 | Platinum | Reinforced Nylon 2-2 GR40 | 115 Zirconia | 80 |
| 11 AB001070326 | Platinum | Reinforced Nylon 2-2 GR60 | 115 Zirconia | 40 |
| 12 AB001070328 | Platinum | Reinforced Nylon 2-2 GR80 | 115 Zirconia | 20 |




640



12






2




Selection Platinum Flap Discs 115/125 mm (Fiber backing pad)



| Module Code | Description | | | | |
|-------------|--------------|----------|-----------------|----------------------|----------|
| AB008880123 | AM/123 | | | 640 | |
| | Article Code | Line | Specification | Diameter x thickness | Quantity |
| 1 | AB001050304 | Platinum | Fiber 1-1 GR40 | 115 Zirconia | 100 |
| 2 | AB001050306 | Platinum | Fiber 1-1 GR60 | 115 Zirconia | 60 |
| 3 | AB001050308 | Platinum | Fiber 1-1 GR80 | 115 Zirconia | 40 |
| 4 | AB001050312 | Platinum | Fiber 1-1 GR120 | 115 Zirconia | 20 |
| 5 | AB001120004 | Platinum | Fiber 1-1 GR40 | 115 Aluminium Oxide | 60 |
| 6 | AB001120006 | Platinum | Fiber 1-1 GR60 | 115 Aluminium Oxide | 40 |
| 7 | AB001050404 | Platinum | Fiber 1-1 GR40 | 125 Zirconia | 100 |
| 8 | AB001050406 | Platinum | Fiber 1-1 GR60 | 125 Zirconia | 60 |
| 9 | AB001050408 | Platinum | Fiber 1-1 GR80 | 125 Zirconia | 40 |
| 10 | AB001050412 | Platinum | Fiber 1-1 GR120 | 125 Zirconia | 20 |
| 11 | AB001120104 | Platinum | Fiber 1-1 GR40 | 125 Aluminium Oxide | 60 |
| 12 | AB001120106 | Platinum | Fiber 1-1 GR60 | 125 Aluminium Oxide | 40 |





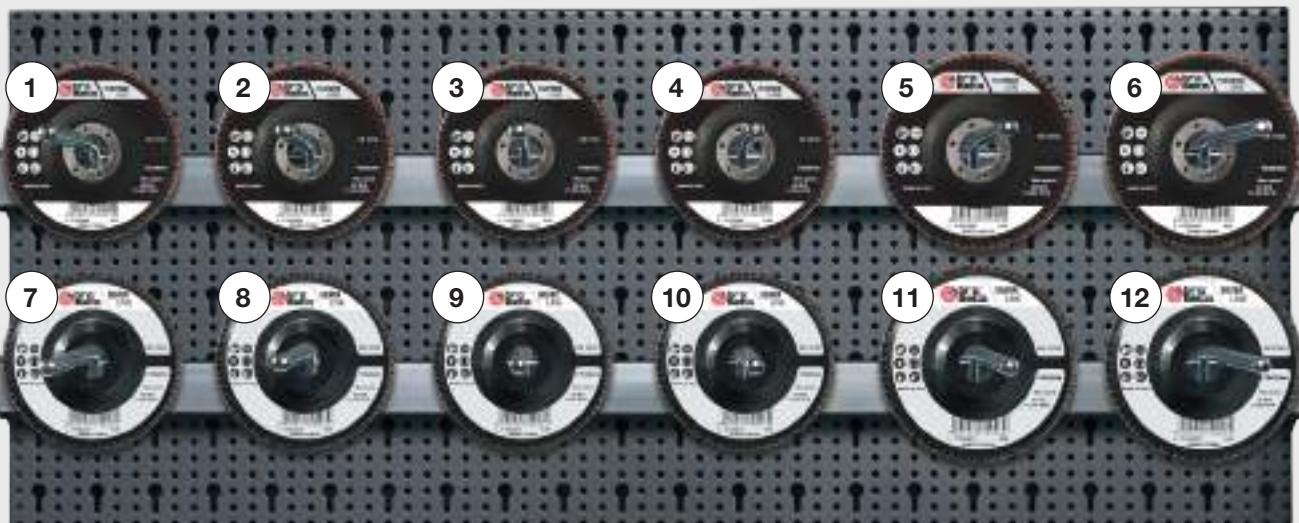Selection Aluminium Oxide Flap Discs 115/125 mm



| Module Code | Description | |
|-------------|-------------|--|
| AB008880124 | AM/124 | |

| Article Code | Line | Specification | Diameter x thickness | Quantity |
|----------------|----------|-----------------|----------------------|----------|
| 1 AB001120004 | Platinum | Fiber 1-1 GR40 | 115 Aluminium Oxide | 140 |
| 2 AB001120006 | Platinum | Fiber 1-1 GR60 | 115 Aluminium Oxide | 80 |
| 3 AB001120008 | Platinum | Fiber 1-1 GR80 | 115 Aluminium Oxide | 40 |
| 4 AB001120012 | Platinum | Fiber 1-1 GR120 | 115 Aluminium Oxide | 20 |
| 5 AB001120104 | Platinum | Fiber 1-1 GR40 | 125 Aluminium Oxide | 80 |
| 6 AB001120106 | Platinum | Fiber 1-1 GR60 | 125 Aluminium Oxide | 40 |
| 7 AB001110004 | Silver | Nylon 1-1 GR40 | 115 Aluminium Oxide | 140 |
| 8 AB001110006 | Silver | Nylon 1-1 GR60 | 115 Aluminium Oxide | 80 |
| 9 AB001110008 | Silver | Nylon 1-1 GR80 | 115 Aluminium Oxide | 40 |
| 10 AB001110012 | Silver | Nylon 1-1 GR120 | 115 Aluminium Oxide | 20 |
| 11 AB001110104 | Silver | Nylon 1-1 GR40 | 125 Aluminium Oxide | 80 |
| 12 AB001110106 | Silver | Nylon 1-1 GR60 | 125 Aluminium Oxide | 40 |


775
1


Selection Mounted Flap Wheels



| Module Code | Description | |
|-------------|-------------|--|
| AB008880125 | AM/125 | |


| Article Code | Line | Diameter x thickness | Grit | Quantity |
|----------------|--------|----------------------|-------|----------|
| 1 AB001203166 | Silver | 30 x 15 | GR60 | 100 |
| 2 AB001203186 | Silver | 30 x 15 | GR80 | 100 |
| 3 AB001204266 | Silver | 40 x 20 | GR60 | 75 |
| 4 AB001204286 | Silver | 40 x 20 | GR80 | 75 |
| 5 AB001205266 | Silver | 50 x 20 | GR60 | 50 |
| 6 AB001205286 | Silver | 50 x 20 | GR80 | 50 |
| 7 AB001205366 | Silver | 50 x 30 | GR60 | 50 |
| 8 AB001205386 | Silver | 50 x 30 | GR80 | 50 |
| 9 AB001206366 | Silver | 60 x 30 | GR60 | 75 |
| 10 AB001206386 | Silver | 60 x 30 | GR80 | 75 |
| 11 AB001206396 | Silver | 60 x 30 | GR120 | 75 |




1.490



1



Selection Mounted Points

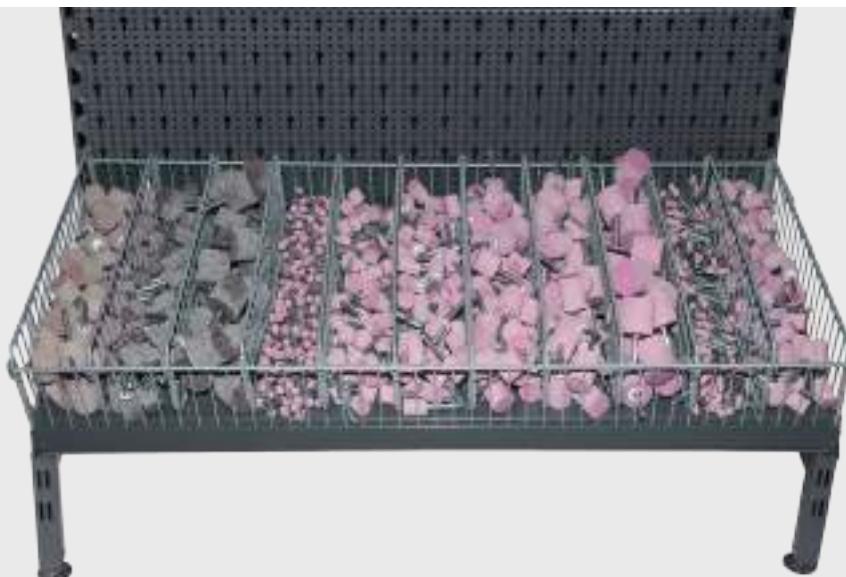

| Module Code | Description | | | | |
|-------------|-------------|--|--|--|-------|
| AB008880126 | AM/126 | | | | 1.490 |


| Article Code | Line | Diameter x thickness | Shaft | Figure | Quantity |
|---------------|-------------------|----------------------------------|--------|-------------|----------|
| 1 AB000920027 | Mounted point | Stainless Steel/Steel 30 x 30 | 6 x 40 | Cylindrical | 100 |
| 2 AB000940036 | Mounted point | Cast Iron 40 x 40 | 8 x 40 | Cylindrical | 40 |
| 3 AB000940006 | Mounted point | Cast Iron 20 x 30 | 6 x 40 | Cylindrical | 100 |
| 4 AB000900162 | Mounted point | Steel 30 x 30 | 6 x 40 | Cylindrical | 100 |

| | | | | | | |
|---------------|--|------------------------|---------|--------|-----------------|-----|
| 5 AB000902009 | | Mounted point Steel | 10 x 20 | 6 x 40 | Round Nose Cone | 200 |
|---------------|--|------------------------|---------|--------|-----------------|-----|

| | | | | | | |
|---------------|--|------------------------|---------|--------|-------------|-----|
| 6 AB000900165 | | Mounted point Steel | 30 x 40 | 6 x 40 | Cylindrical | 60 |
| 7 AB000900189 | | Mounted point Steel | 40 x 40 | 6 x 40 | Cylindrical | 40 |
| 8 AB000900129 | | Mounted point Steel | 20 x 20 | 6 x 40 | Cylindrical | 200 |
| 9 AB000900033 | | Mounted point Steel | 10 x 10 | 3 x 37 | Cylindrical | 400 |

| | | | | | | |
|----------------|--|------------------------|---------|--------|--------------------------|-----|
| 10 AB000908018 | | Mounted point Steel | 15 x 30 | 6 x 80 | Cylindrical (long shaft) | 150 |
|----------------|--|------------------------|---------|--------|--------------------------|-----|

| | | | | | | |
|----------------|--|------------------------|---------|--------|-------------|-----|
| 11 AB000900135 | | Mounted point Steel | 20 x 30 | 6 x 40 | Cylindrical | 100 |
|----------------|--|------------------------|---------|--------|-------------|-----|

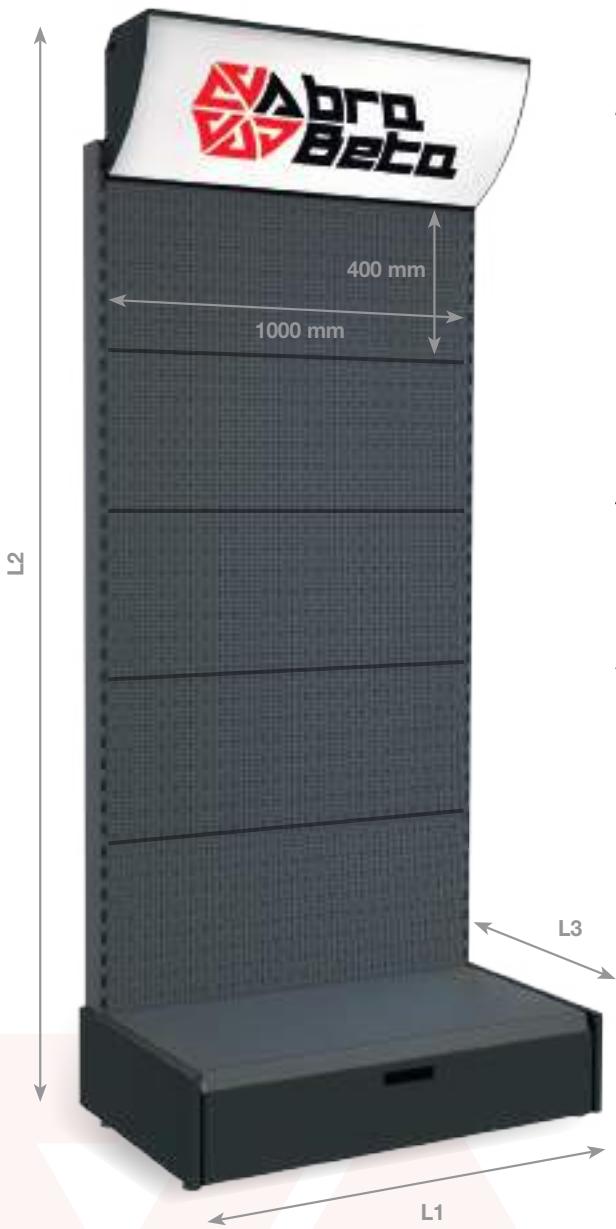

Display Unit C68N

Abra Beta empty display wall

AB009996025999

1m complete with 5 wall panels

| L1 mm | L2 mm | L3 mm | |
|----------|----------|----------|---|
| 1000 | 2200 | 560 | 1 |

AB009996000999

Tilting perforated bar
for abrasives


| L1 mm | L2 mm | |
|----------|----------|---|
| 1000 | 40 | 1 |




AB009996015999

Hook for abrasives

| L1 mm | L2 mm | |
|----------|----------|---|
| 200 | 50 | 1 |

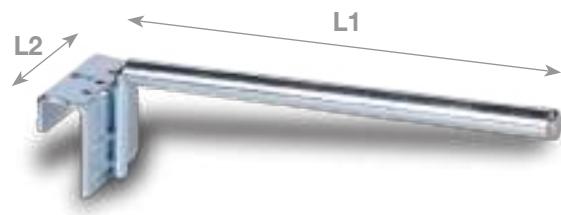

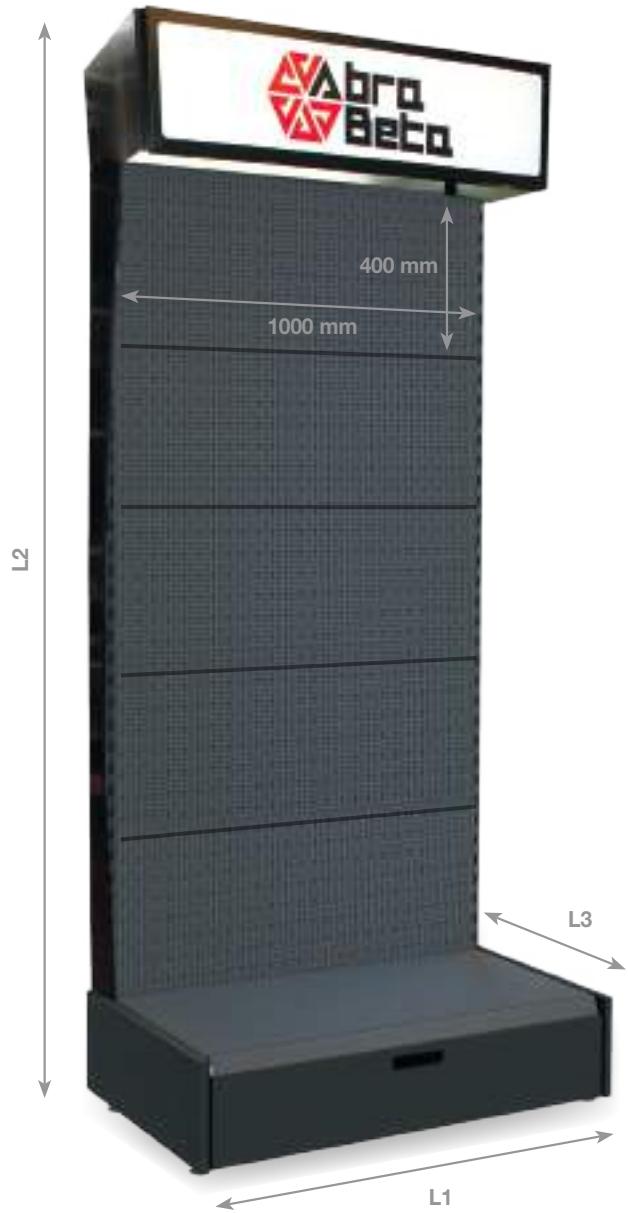

Display Unit C68

Abra Beta empty display wall

AB009996005999


1m complete with 5 wall panels

| L1 mm | L2 mm | L3 mm | |
|----------|----------|----------|---|
| 1000 | 2200 | 560 | 1 |

AB009996000999

Tilting perforated bar
for abrasives


| L1 mm | L2 mm | |
|----------|----------|---|
| 1000 | 40 | 1 |

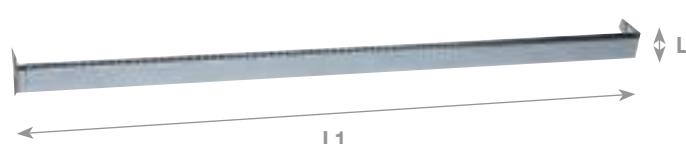

AB009996015999

Hook for abrasives

| L1 mm | L2 mm | |
|----------|----------|---|
| 200 | 50 | 1 |

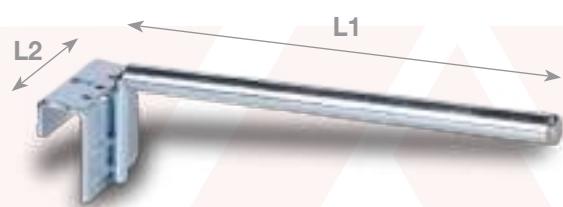

Sabro Beta

SHOP *in shop*



Notes

Notes





Abra Beta S.p.A.
Via delle Sorti, 10
25050 - Pian Camuno (BS) - Italy
Phone: +39 0364 590.792
info@abrabeta.it

